


PART NO.	Dimensions	
	A	B
2x2	--	6.00
2x3	4.00	8.00
2x4	6.00	10.00
2x5	8.00	12.00
2x6	10.00	14.00
2x7	12.00	16.00
2x8	14.00	18.00
2x9	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x13	24.00	28.00
2x14	26.00	30.00
2x15	28.00	32.00
2x16	30.00	34.00
2x17	32.00	36.00
2x18	34.00	38.00
2x19	36.00	40.00
2x20	38.00	42.00

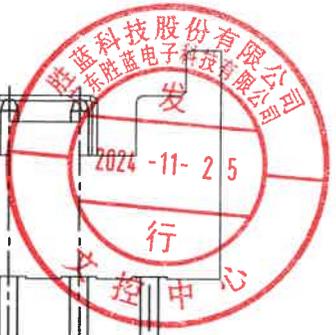

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements








- 12002W00-2XNPX-5A-HF
 ① Series No.
 ② W90 : Side Contact
 W00 : Up Contact
 ③ No. of Circuits
 ④ X : Product color(A--Y)
 Blank : Natural type
 ⑤ 5A : Gold-flash
 ⑥ HF : Halogen Free

Part No.	Material	Color	PIN Material
12002W00-2XNP	Nylon 66,UL94V-0	灰色	Brass/Tin-plated
12002W00-2XNP-5A	Nylon 66,UL94V-0	灰色	Brass/Gold-flash
12002W00-2XNPJ	Nylon 66,UL94V-0	灰色	Brass/Tin-plated
12002W00-2XNP-HF	Nylon 66,UL94V-0	本色(白色)	Brass/Tin-plated
12002W00-2XNP-5A-HF	Nylon 66,UL94V-0	本色(白色)	Brass/Gold-flash

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
C0	换图框发行	09.11.25	LINEAR	ANGLES	1:1	J-	20.11.25	12002W00-2XNPX-XX	ENDE05
C3	新增2xNPJ规格	16.05.20			0.0±0.25				
C4	依WR1704280044增加镀全金1u"规格	17.04.28	0.00±0.15	X° ±3°	APPROVED	VM	24.11.25	TITLE	PHD 2.00mm PITCH WAFER
C5	YB202408210019	24.11.09							
			UNIT: MM						
			SIZE: A4						



REV	C5	SHEET	1/2
-----	----	-------	-----

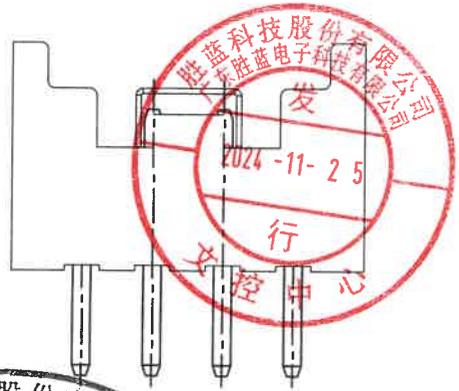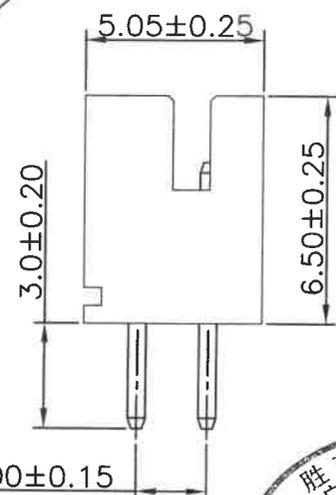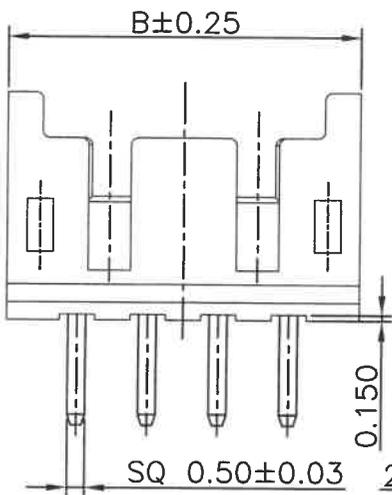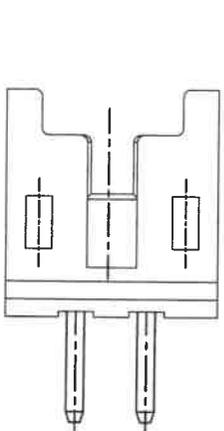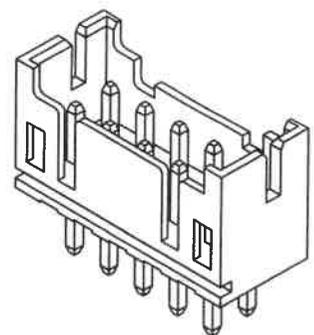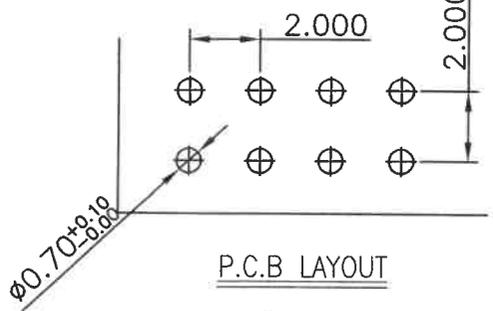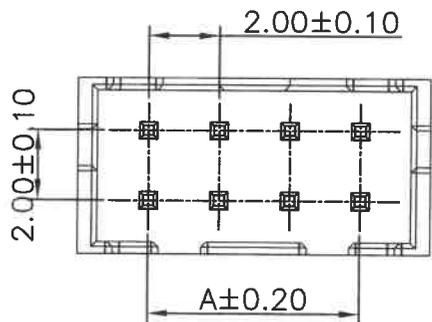

PART NO.	Dimensions	
	A	B
2x2	--	6.00
2x3	4.00	8.00
2x4	6.00	10.00
2x5	8.00	12.00
2x6	10.00	14.00
2x7	12.00	16.00
2x8	14.00	18.00
2x9	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x13	24.00	28.00
2x14	26.00	30.00
2x15	28.00	32.00
2x16	30.00	34.00
2x17	32.00	36.00
2x18	34.00	38.00
2x19	36.00	40.00
2x20	38.00	42.00

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

12002W00-2XNPX-P1-HF
 ① ② ③ ④ ⑤ ⑥
 ① Series No.
 ② W90 : Side Contact
 W00 : Up Contact
 ③ No. of Circuits
 ④ X : Product color(A--Y)
 Blank : Natural type
 ⑤ P1 : P1 Type
 ⑥ HF : Halogen Free

Part No.	Material	Color	PIN Material
12002W00-2XNP-P1-HF	Nylon 66,UL94V-0	Natural(White)	Brass/Tin-plated
12002W00-2XNPA-P1-HF	Nylon 66,UL94V-0	Black	Brass/Tin-plated
12002W00-2XNP-P2-HF	Nylon 66,UL94V-0	Natural(White)	Brass/Tin-plated

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
C0	换图框发行	09.11.25	LINEAR	1:1			12002W00-2XNPX-XX	ENDE05
C3	新增2xNPJ规格	16.05.20	ANGLES	APPROVED	J-	20.11.25		
C4	依WR1704280044增加镀全金1u"规格	17.04.28	0.0±0.25	DESIGNER	YM	24.11.25		
C5	YB202408210019	24.11.09	0.00±0.15	DRAWN	ZJH	24.11.09		
			0.000±0.08					

