
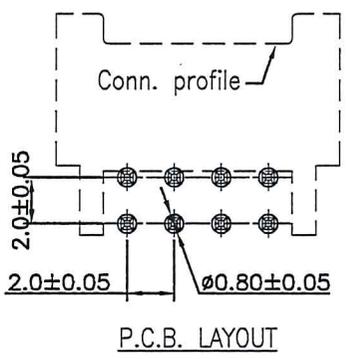






1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

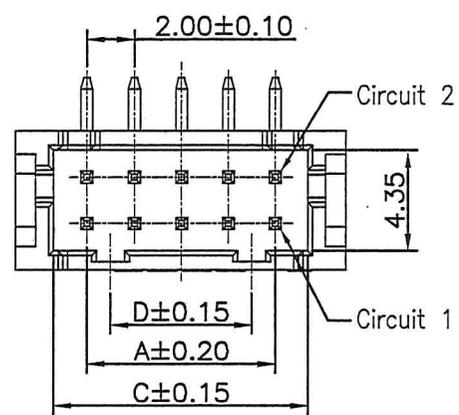

Specifications:  
 Rated Voltage : 250V AC/DC  
 Rated Current : 3A AC,DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 10mΩ(Max.)  
 Insulation Resistance : 800MΩ(Min.)  
 Temperature Range : -25°C~+85°C  
 Contact: Brass/Matte Tin-plated  
 Insulator: High temperature plastic,UL94V-0  
 Halogen Free  
 Color: Natural(Beige)  
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard requirements

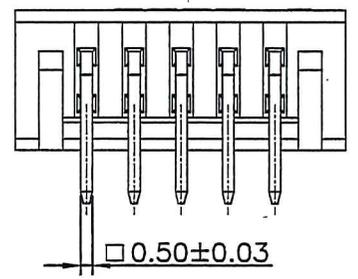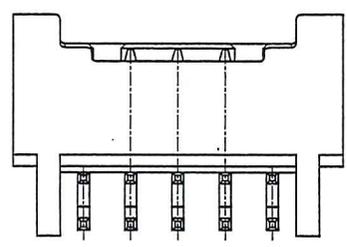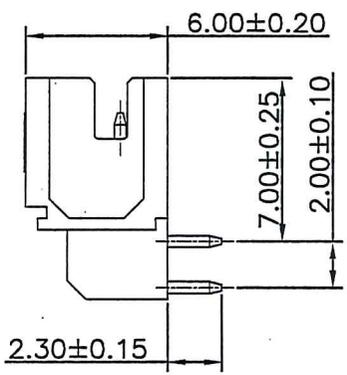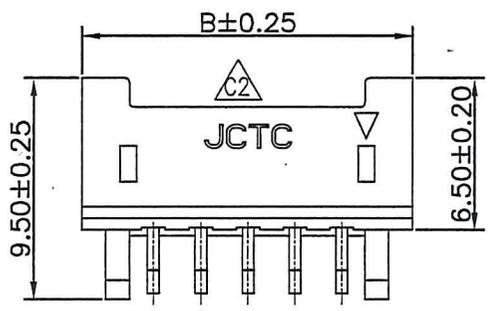

12002W90-2XNP-B-3E-HF  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② W90 : Side Contact
- ③ No. of Circuits
- ④ B: B TYPE
- ⑤ 3E: Matte Tin-plated
- ⑥ HF: Halogen Free



Circuits	Dimensions			
	A	B	C	D
2x3P	4.00	10.00	6.70	2.00
2x4P	6.00	12.00	8.70	4.00
2x5P	8.00	14.00	10.70	6.00
2x6P	10.00	16.00	12.70	8.00
2x7P	12.00	18.00	14.70	10.00
2x8P	14.00	20.00	16.70	12.00
2x9P	16.00	22.00	18.70	14.00
2x10P	18.00	24.00	20.70	16.00
2x11P	20.00	26.00	22.70	18.00
2x12P	22.00	28.00	24.70	20.00
2x13P	24.00	30.00	26.70	22.00
2x14P	26.00	32.00	28.70	24.00
2x15P	28.00	34.00	30.70	26.00
2x16P	30.00	36.00	32.70	28.00
2x17P	32.00	38.00	34.70	30.00
2x18P	34.00	40.00	36.70	32.00
2x19P	36.00	42.00	38.70	34.00
2x20P	38.00	44.00	40.70	36.00
2x21P	40.00	46.00	42.70	38.00
2x22P	42.00	48.00	44.70	40.00
2x23P	44.00	50.00	46.70	42.00
2x24P	46.00	52.00	48.70	44.00
2x25P	48.00	54.00	50.70	46.00

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
C0	新图面发行	13.07.04	LINEAR	ANGLES	1:1			12002W90-2XNP-B-3E-HF	ENDE05				
C1	更新公司名称	17.01.03	0.0±0.25	X° REF±6°	APPROVED	Nelson	22.08.08			TITLE 2.00mm PITCH DUAL ROW DIP TYPE ·90° WAFER			
C2	依ECN20220629155变更 X1处	22.07.08	0.0±0.15	X° ±3°	DESIGNER	MM	22.07.08	REV					C2
			0.00±0.08	X° X' ±2°	DRAWN	ZZK	2022.07.08						

1 2 3 4 5 6 7 8