


Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 30mΩ(Max.)
 Insulation Resistance : 1000MΩ(Min.)
 Temperature Range : -25°C~+85°C
 Contact: Brass/Matte Tin-plated
 Insulator: Thermal Plasticity Resin, UL94V-0
 Halogen Free; Natural(Beige)
 Cap: Thermal Plasticity Resin, UL94V-0
 Halogen Free; Natural(Beige)
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

Circuits	Dimensions		
	A	B	C
2P	--	6.00	1.50
3P	4.00	8.00	
4P	6.00	10.00	3.50
5P	8.00	12.00	5.50
6P	10.00	14.00	7.50
7P	12.00	16.00	9.50
8P	14.00	18.00	11.50
9P	16.00	20.00	13.50
10P	18.00	22.00	15.50
11P	20.00	24.00	
12P	22.00	26.00	
13P	24.00	28.00	
14P	26.00	30.00	
15P	28.00	32.00	
16P	30.00	34.00	

- 12005W00-NP-S4-XX-HF-R
 ① ② ③ ④ ⑤ ⑥ ⑦
- ① Series No.
 - ② W90 : Side Contact
W00 : Up Contact
 - ③ No. of Circuits
 - ④ S4: S4 TYPE
 - ⑤ 3E: Matte Tin-plated
5A: 1u"Au
 - ⑥ HF: Halogen Free
 - ⑦ R: Tape & Reel(With Cap)



REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC®			
AO	新增规格	23.09.12	LINEAR	ANGLES	1:1	巫继运	23.09.12	12005W00-NP-S4-XX-HF-R	ENDE05				
			0.0 ± 0.25	X° REF ± 6°	APPROVED			TITLE					
			0.00 ± 0.15	X° ± 3°	DESIGNER			2.00mm PITCH WAFER					
			0.000 ± 0.08	X° X' ± 2°	DRAWN			PIP TYPE 180°/A型					

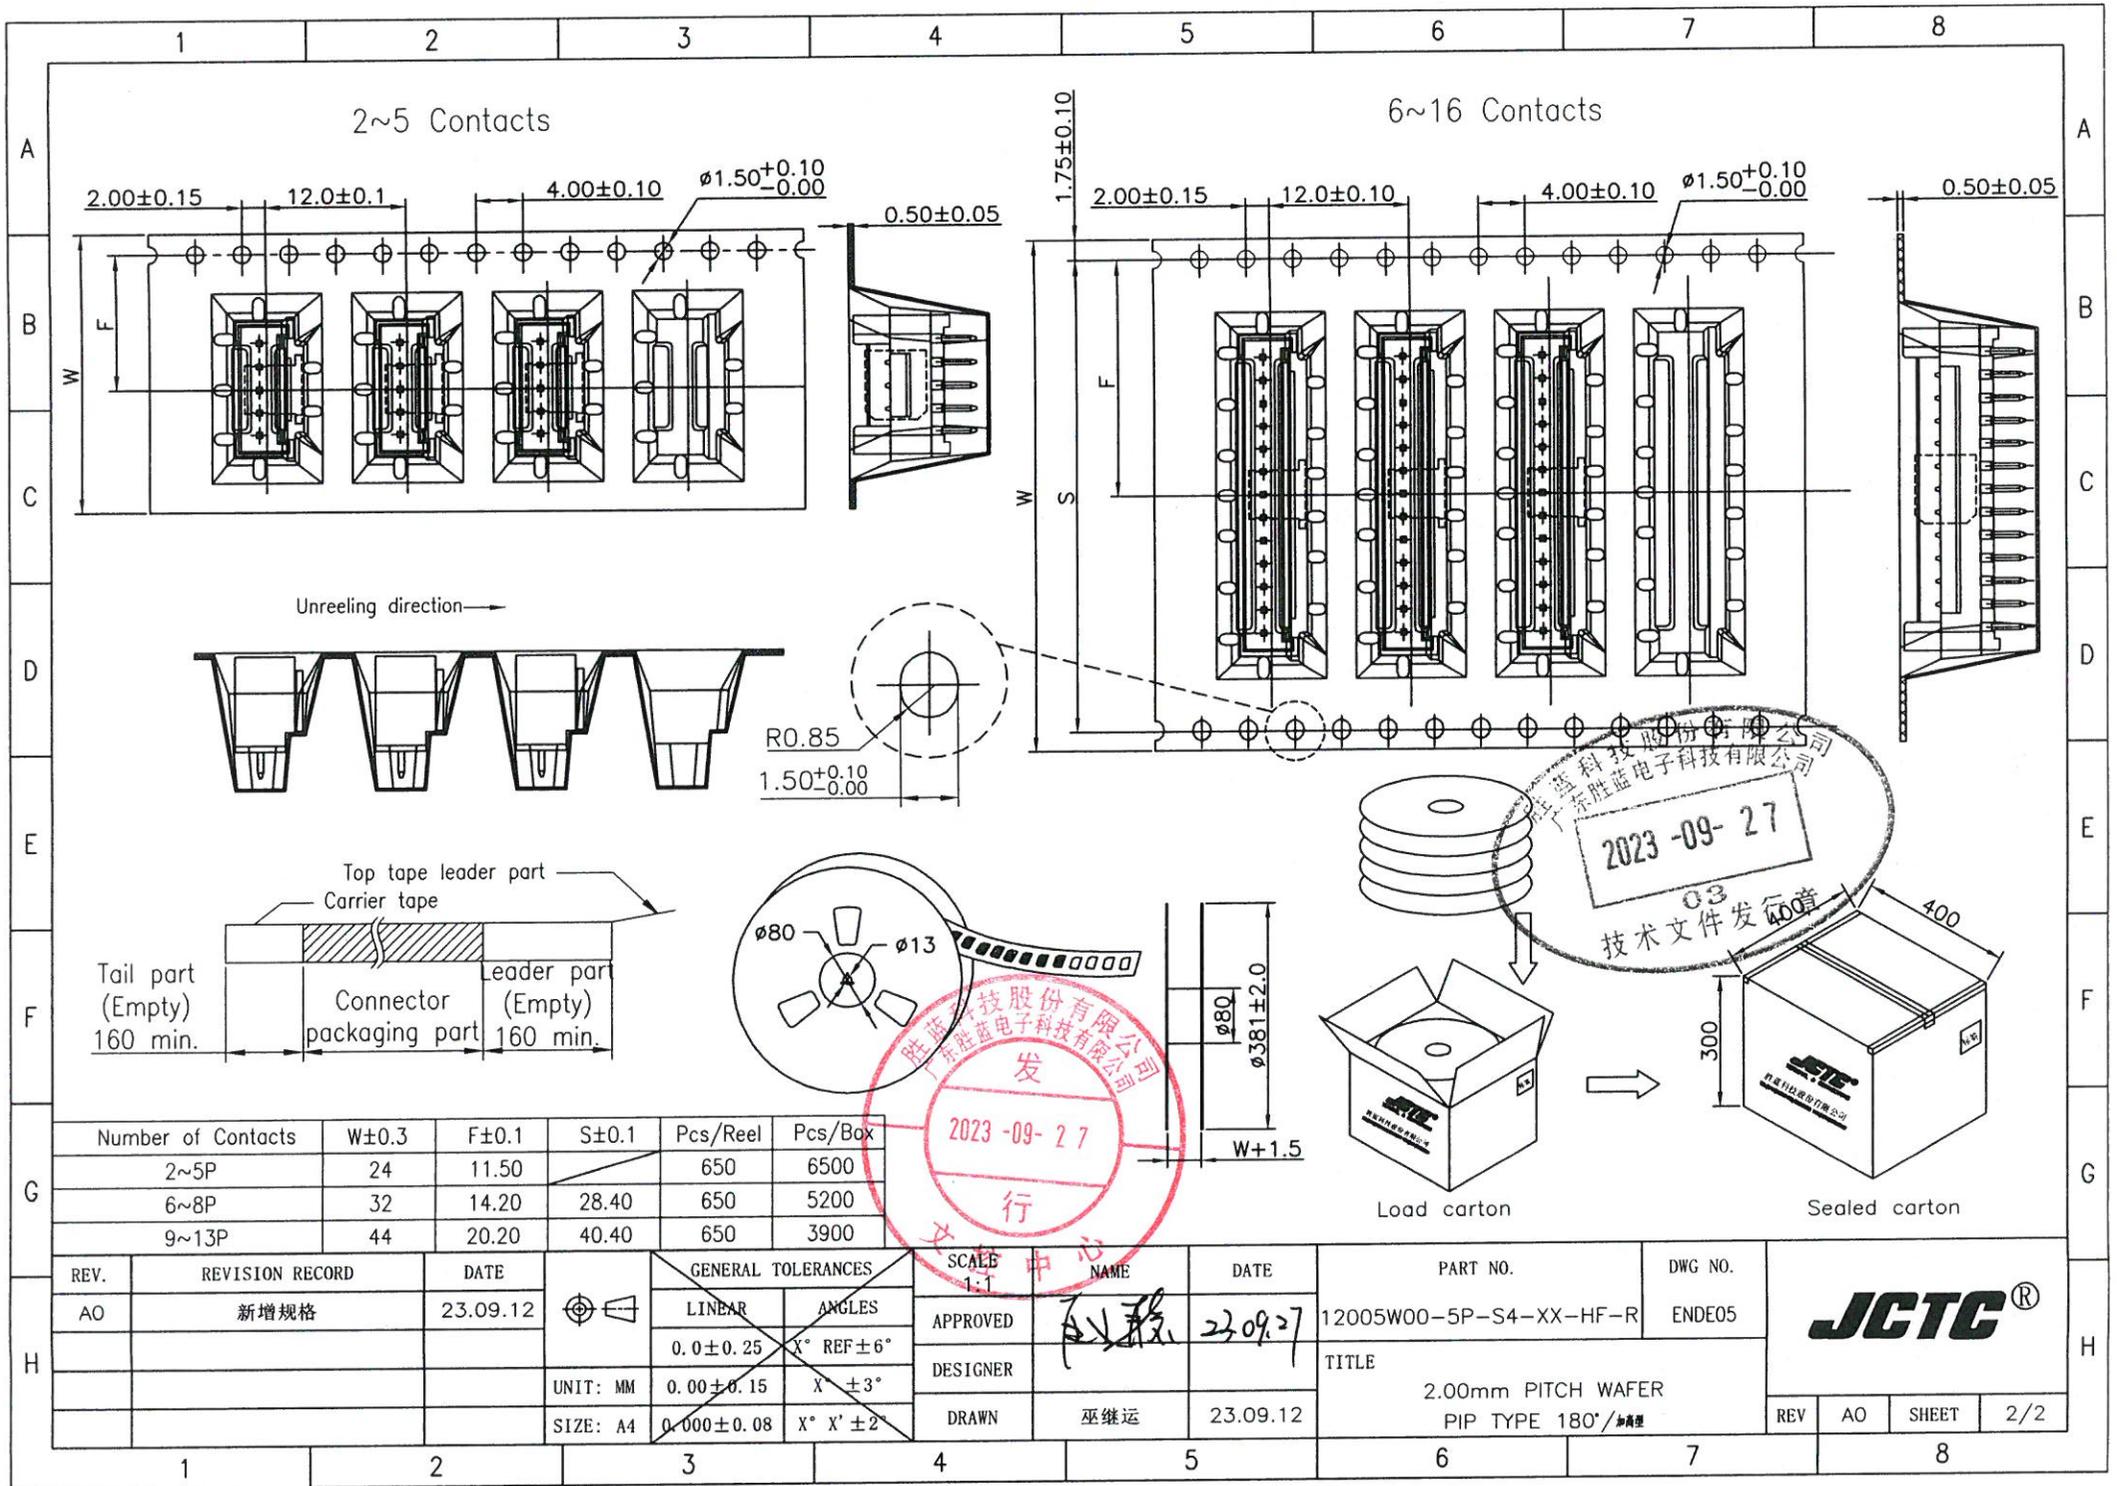

2023-09-27
03
技术文件发行章

2023-09-27
发行

Number of Contacts	W±0.3	F±0.1	S±0.1	Pcs/Reel	Pcs/Box
2~5P	24	11.50	28.40	650	6500
6~8P	32	14.20	40.40	650	5200
9~13P	44	20.20		650	3900

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	
AO	新增规格	23.09.12	LINER	ANGLES	1:1	巫继运	23.09.12	12005W00-5P-S4-XX-HF-R	ENDE05	
			0.0±0.25	X° REF±6°	APPROVED					
			UNIT: MM	0.00±0.15	DESIGNER			TITLE		
			SIZE: A4	0.000±0.08	DRAWN	巫继运	23.09.12	2.00mm PITCH WAFER		
				X° X' ±2°				PIP TYPE 180°/加成型		

REV	AO	SHEET	2/2
-----	----	-------	-----