

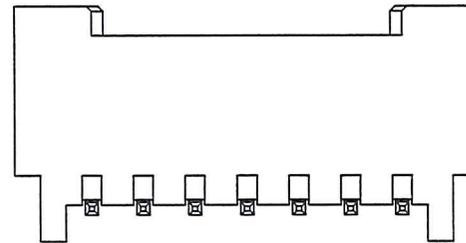
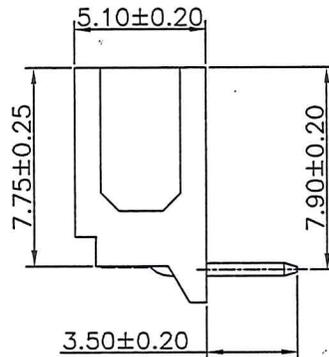
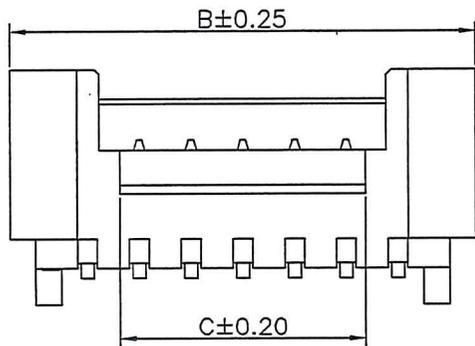


Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 30mΩ(Max.)
 Insulation Resistance : 1000MΩ(Min.)
 Temperature Range : -25°C~+85°C
 Contact: Brass/Matte Tin-plated
 Material: Thermal Plasticity Resin, UL94V-0 Halogen Free
 Color: Natural(Beige)
 The product using material and processing must conform to the *WI-PZ-142* technical standard control requirements

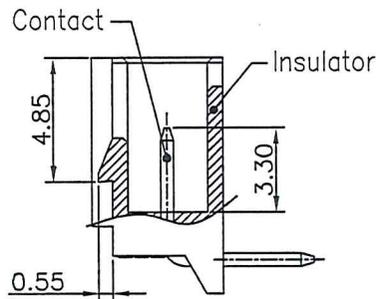

12005W90-NP-A-S1-3E-HF
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ A: A TYPE
- ⑤ S1: S1 TYPE
- ⑥ 3E: Matte Tin-plated
5A: Matte Gold-flash
- ⑦ HF: Halogen Free

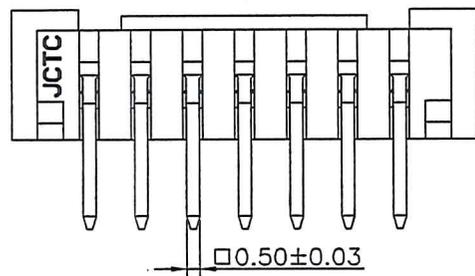

Circuits	Dimensions		
	A	B	C
2P	--	8.00	1.50
3P	4.00	10.00	3.50
4P	6.00	12.00	5.50
5P	8.00	14.00	7.50
6P	10.00	16.00	9.50
7P	12.00	18.00	11.50
8P	14.00	20.00	13.50
9P	16.00	22.00	15.50
10P	18.00	24.00	
11P	20.00	26.00	
12P	22.00	28.00	
13P	24.00	30.00	
14P	26.00	32.00	
15P	28.00	34.00	
16P	30.00	36.00	



REV.	REVISION RECORD	DATE	UNIT: MM SIZE: A4	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	JCTC® TERMINAL&CONNECTORS
				LINEAR	ANGLES	APPROVED			TITLE	ENDE05	
C0	新图面发行	13.06.13		0.0±0.25	X° REF±6°		Nelson	22.12.12	12005W90-NP-A-S1-3E-HF		REV C2 SHEET 1/1
C1	更新公司名称	17.07.10		0.00±0.15	X° ±3°		VM	22.12.12			
C2	依据PBJOA202212010010新增规格	22.12.12		0.000±0.08	X° X' ±2°		Hui	2022.12.12	2.00mm PITCH DIP TYPE 90° WAFER		