


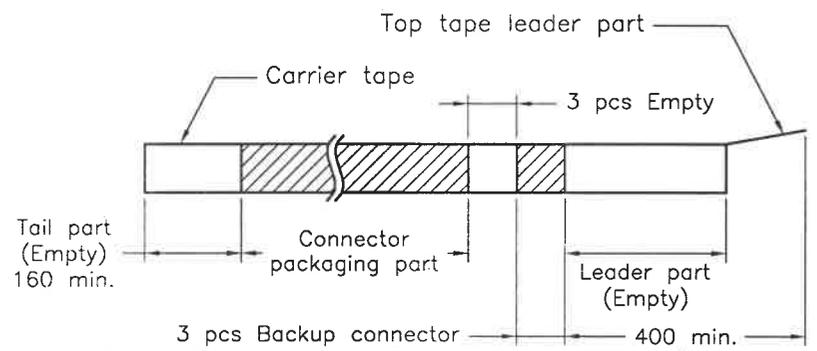
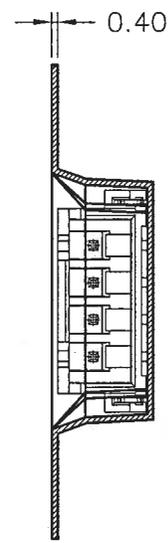
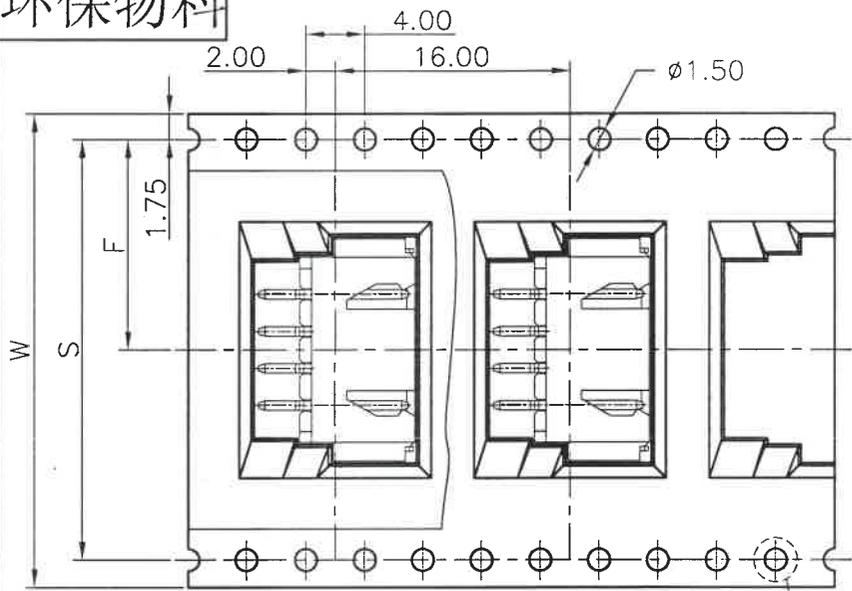



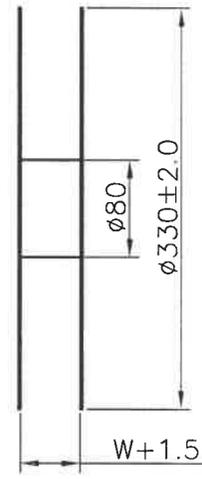

环保物料

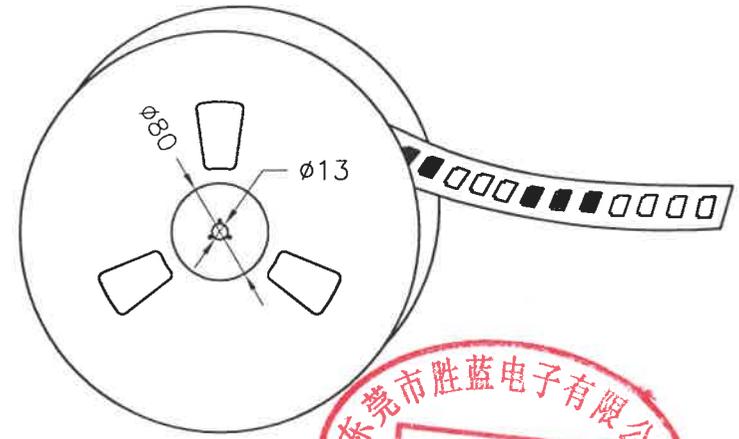

Unreeling direction →

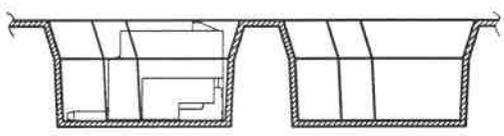

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
4P~5P	32	14.20	28.40	500
6P~11P	44	20.20	40.40	500
12P~14P	56	26.20	52.40	500
14P~16P	77	36.70	73.40	500

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC®	PART. NO:
A0	新图面发行	15.01.21	LINEAR 0.0±0.25	1:1	李健权	12/1/2015	□苏州伟聚 □东莞胜景	12501W90-NP-S-L-HF-NK
			ANGLES X° REF±6°	APPROVED	伍文聪	15.01.21	■东莞胜蓝	DWG. NO:
			0.00±0.15	DESIGNER				ENDE05
			X° ±3°	DRAWN	伍文聪	15.01.21	TITLE:	REV: A0 SHEET: 2/2
			0.000±0.08				XH 2.50mm Pitch 90° SMT Type Wafer	

1

2

3

4

5

6

7

8