
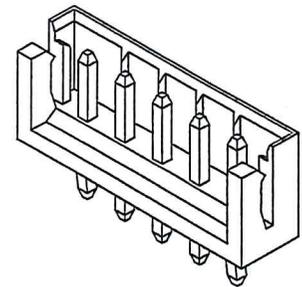
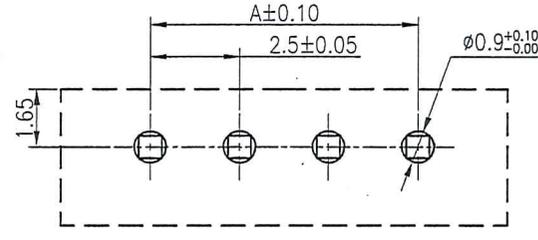





1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

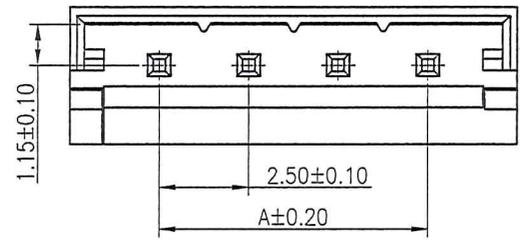

Specifications
 Voltage Rating: 250V AC,DC
 Current Rating: 3A AC,DC
 Withstanding Voltage: 800V AC/minute
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Temperature Range: -25°C ~ +85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

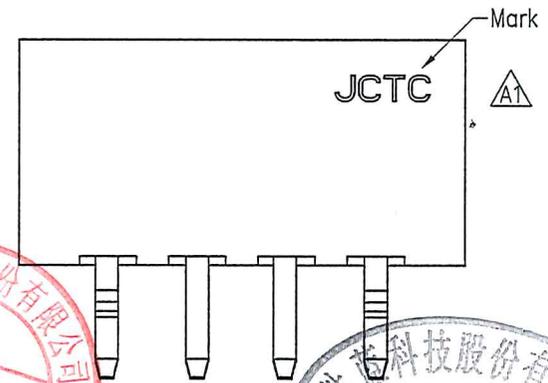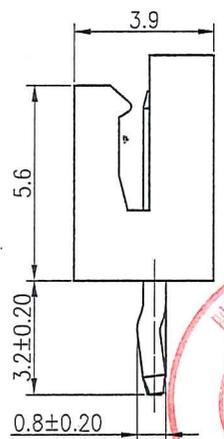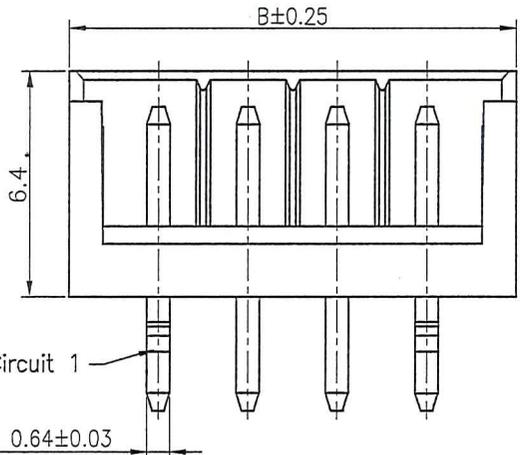

Circuits Part No	Dimensions	
	A	B
2P	2.50	7.50
3P	5.00	10.00
4P	7.50	12.50
5P	10.00	15.00
6P	12.50	17.50
7P	15.00	20.00
8P	17.50	22.50
9P	20.00	25.00
10P	22.50	27.50
11P	25.00	30.00
12P	27.50	32.50
13P	30.00	35.00
14P	32.50	37.50
15P	35.00	40.00
16P	37.50	42.50

12502W00-NP X-HF-NK
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
A : Black
- ⑤ HF : Halogen Free
- ⑥ NK : No Mark

Suitable for JCTC 12502 series terminal

Part No.	Material	Color	Pin Material
12502W00-NP-HF-NK	Nylon 66,UL94V-0	Natural(White)	Brass/Tin-plated
12502W00-NPA-HF-NK	Nylon 66,UL94V-0	Black	Brass/Tin-plated
12502W00-NP-HF	Nylon 66,UL94V-0	Natural(White)	Brass/Tin-plated
12502W00-NPE-HF	Nylon 66,UL94V-0	Yellow	Brass/Tin-plated
12502W00-NPG-HF	Nylon 66,UL94V-0	Blue	Brass/Tin-plated

REV.	REVISION RECORD	DATE
A0	新图面发行	19.04.18
A1	新增印字规格	22.09.30

GENERAL TOLERANCES		SCALE	NAME	DATE
LINEAR	ANGLES	1:1	Nelson	22.09.30
		0.0±0.25		
0.00±0.15	X° ±3°	APPROVED	mm	22.09.30
0.000±0.08	X° X' ±2°	DESIGNER		
		DRAWN	Fau	22.09.30

PART NO.	DWG NO.
12502W00-NPX-HF-NK	ENDE05
TITLE	
EH 2.50mm PITCH WAFER DIP 180° /高6.4	

JCTC®
 TERMINAL&CONNECTORS

REV	A1	SHEET	1/1
-----	----	-------	-----

1 2 3 4 5 6 7 8