
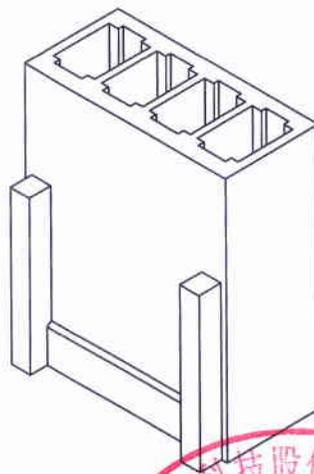
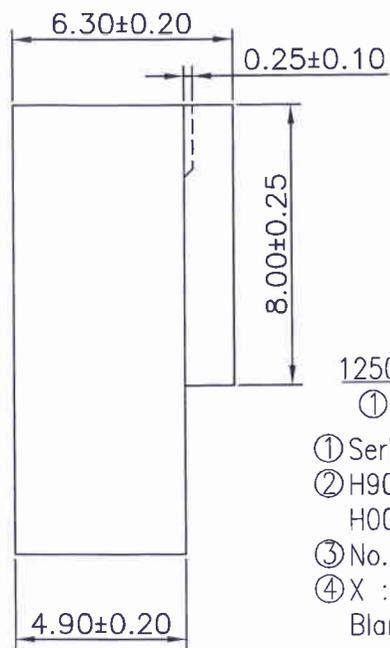


Specifications:


Rated Voltage : 250V AC/DC
 Rated Current : 2.5A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Pitch Between Poles : 2.50mm

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

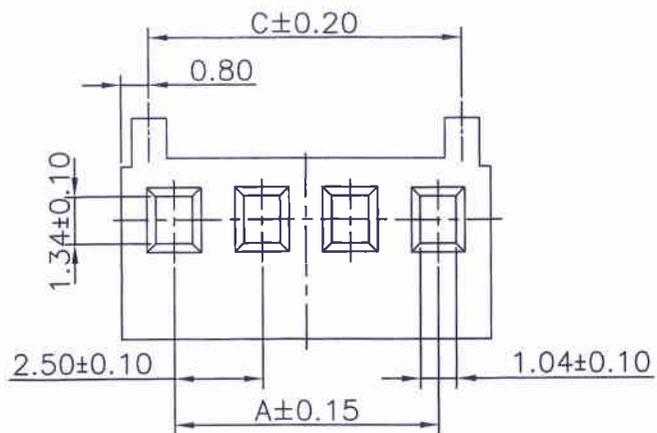

Circuits Part No	Dimensions		
	A	B	C
2P	2.50	5.50	3.86
3P	5.00	8.00	6.40
4P	7.50	10.50	8.90
5P	10.00	13.00	11.40
6P	12.50	15.50	13.90
7P	15.00	18.00	16.40
8P	17.50	20.50	18.90
9P	20.00	23.00	21.40
10P	22.50	25.50	23.90
11P	25.00	28.00	26.40
12P	27.50	30.50	28.90
13P	30.00	33.00	31.40
14P	32.50	35.50	33.90
15P	35.00	38.00	36.40
16P	37.50	40.50	38.90
17P	40.00	43.00	41.40
18P	42.50	45.50	43.90
19P	45.00	48.00	46.40
20P	47.50	50.50	48.90

XX : 模穴号

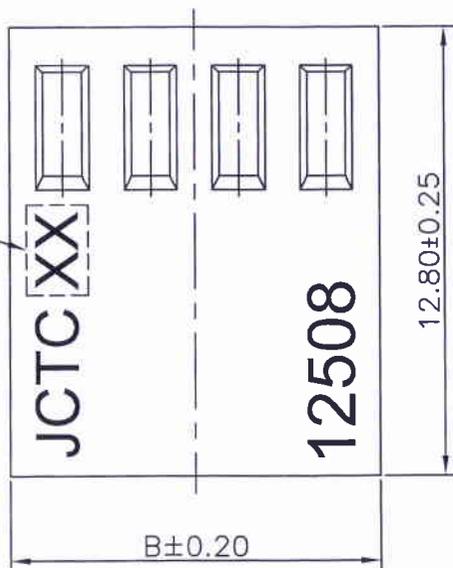

12508H00-NPX

① ② ③④

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank: Natural type



Suitable for JCTC 12543 series terminal

Part No.	Material	Color
12508H00-NPA	Nylon66,UL 94V-0	黑色
12508H00-NPB	Nylon66,UL 94V-0	蓝色
12508H00-NPK	Nylon66,UL 94V-0	白色(无卤)
12508H00-NPM	Nylon66,UL 94V-0	米黄色

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO.:
C0	新图面发行	09.12.12	LINEAR	1:1				
C1	更新公司名称	17.03.20	0.0±0.25	APPROVED	张振坤	2019.05.21		DWG. NO.:
C2	HR1905210089	19.05.21	X° REF±6°	DESIGNER	张振坤	19.05.21		ENDE05
			UNIT: MM	DRAWN	张振坤	19.05.21	TITLE:	REV: C2 SHEET: 1/1
			SIZE: M1				2.50mm PITCH HOUSING	