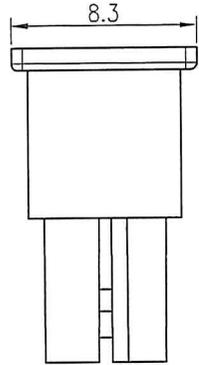
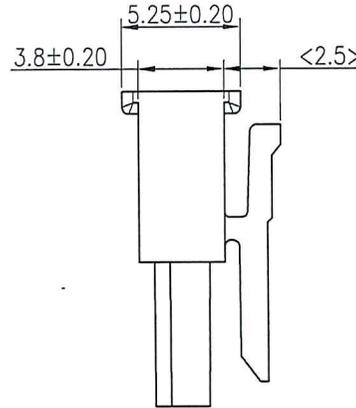
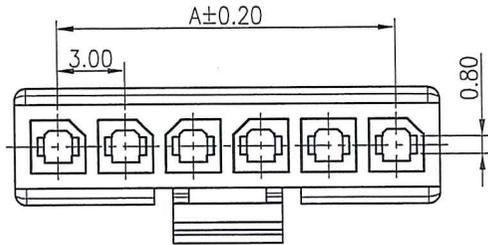
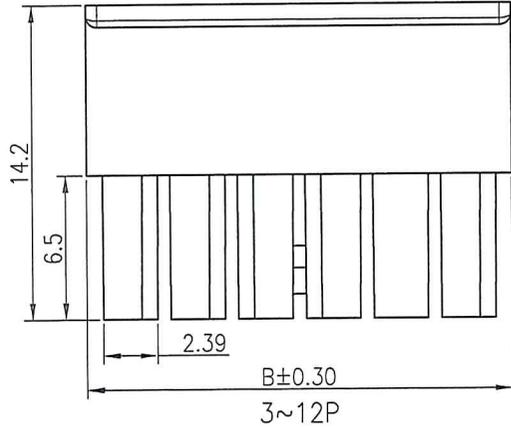


Circuit 1



2P



Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 5A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

33001H00-NPX-F-HF-NK-XX
 ① ② ③④⑤ ⑥ ⑦ ⑧


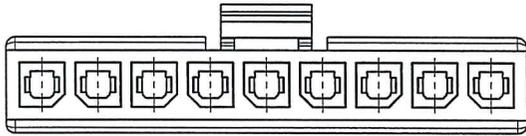

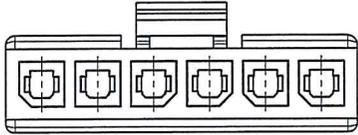
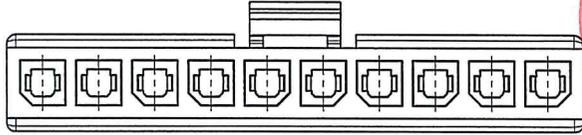

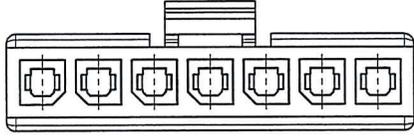
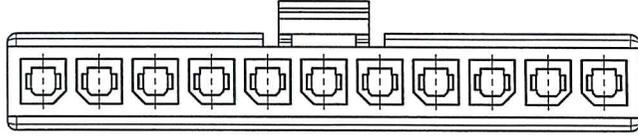

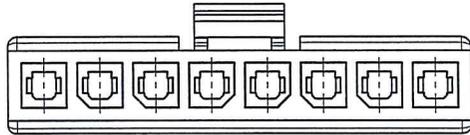
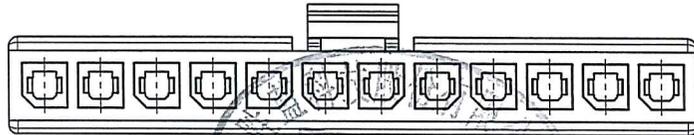
- ① Series No.
- ② H00: Up Contact
- ③ No. of Circuits
- ④ X: Product color (A--Y)
Blank: Natural type
A: Black
- ⑤ F: F Type
- ⑥ HF: Halogen Free
- ⑦ NK: No Mark
- ⑧ XX: Letter Type

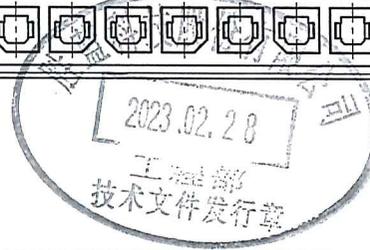
| Circuits Part No | Dimensions | |
|------------------|------------|-------|
| | A | B |
| 2P | -- | 6.85 |
| 3P | 6.00 | 9.85 |
| 4P | 9.00 | 12.85 |
| 5P | 12.00 | 15.85 |
| 6P | 15.00 | 18.85 |
| 7P | 18.00 | 21.85 |
| 8P | 21.00 | 24.85 |
| 9P | 24.00 | 27.85 |
| 10P | 27.00 | 30.85 |
| 11P | 30.00 | 33.85 |
| 12P | 33.00 | 36.85 |

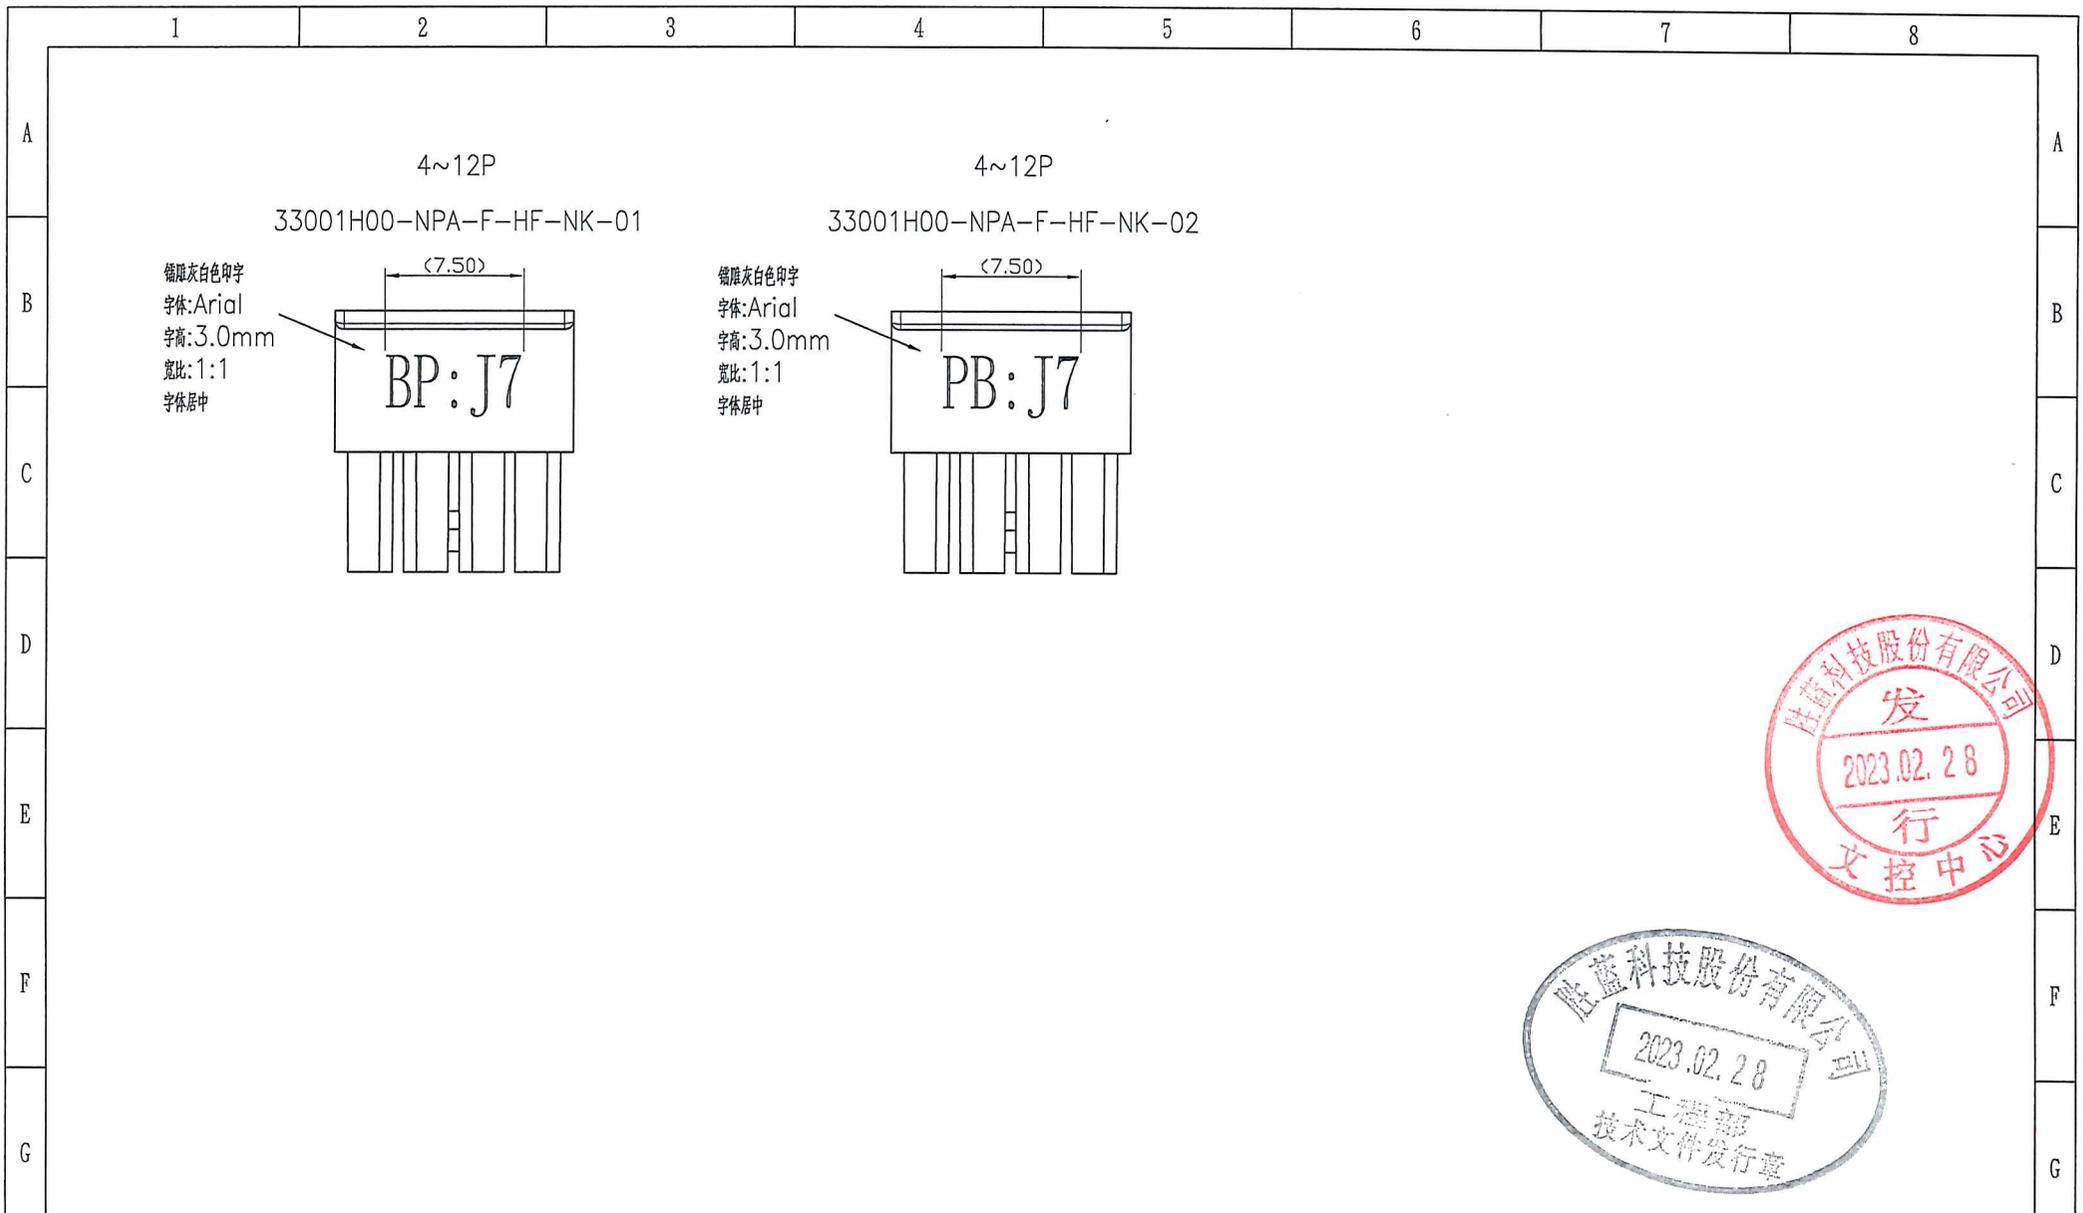


| Part No. | Material | Color |
|-------------------------|------------------|---------|
| 33001H00-NP-F-HF-NK | Nylon 66,UL94V-0 | Natural |
| 33001H00-NPA-F-HF-NK | Nylon 66,UL94V-0 | Black |
| 33001H00-NPA-F-HF-NK-01 | Nylon 66,UL94V-0 | Black |
| 33001H00-NPA-F-HF-NK-02 | Nylon 66,UL94V-0 | Black |

| REV. | REVISION RECORD | DATE | GENERAL TOLERANCES | | SCALE 1:1 | NAME | DATE | PART NO. | DWG NO. | TERMINAL&CONNECTORS | | | |
|------|-----------------|----------|--------------------|-----------|-----------|--------|----------|----------------------|---------|---------------------------|--|--|--|
| A0 | 新图面发行 | 19.08.15 | LINEAR | ANGLES | APPROVED | Nelson | 23.02.23 | 33001H00-NPX-F-HF-NK | ENDE05 | | | | |
| A1 | YB20230106004 | 23.01.11 | 0.0±0.25 | X° REF±6° | DESIGNER | ML | 23.02.23 | TITLE | | 3.00mm PITCH HOUSING (单排) | | | |
| | | | UNIT: MM | X° ±3° | DRAWN | Fau | 23.02.23 | | | | | | |

| | | | | | | | | | | | | | | | |
|---|------|--|----------|---|--------------------|-----------|--|---------------|----------|------------------------|---------------------------|---|----|-------|-----|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | | | | |
| A | | | | | | | | | | | | | | | |
| B | | | 5P |  | | 9P |  | | | | | | | | |
| C | | | | | | | | | | | | | | | |
| D | 2P |  | 6P |  | | 10P |  | | | | | | | | |
| E | 3P |  | 7P |  | | 11P |  | | | | | | | | |
| F | 4P |  | 8P |  | | 12P |  | | | | | | | | |
| G | | | | | | | | | | | | | | | |
| H | REV. | REVISION RECORD | DATE |  | GENERAL TOLERANCES | | SCALE 1:1 | NAME | DATE | PART NO. | DWG NO. |  TERMINAL&CONNECTORS | | | |
| | A0 | 新图面发行 | 19.08.15 | | LINEAR | ANGLES | APPROVED | <i>Nelson</i> | 23.02.23 | 330011100-NPX-F-11F-NK | ENDE05 | | | | |
| | A1 | YB20230106004 | 23.01.11 | | 0.0±0.25 | X° REF±6° | DESIGNER | <i>MM</i> | 23.02.23 | TITLE | | | | | |
| | | | | | UNIT: MM | 0.00±0.15 | X° ±3° | DRAWN | Fau | 23.02.23 | 3.00mm PITCH HOUSING (单排) | | | | |
| | | | | STZE: A4 | 0.000±0.08 | X° X' ±2° | | | | | | REV | A1 | SHEET | 2/3 |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | | | | |





| | | | | | | | | | | | | | |
|------|-----------------|----------|----------|--------------------|-----------|--------------|--------|----------|------------------------------------|---------|-------------------------|-------|-----|
| REV. | REVISION RECORD | DATE | | GENERAL TOLERANCES | | SCALE 1:1 | NAME | DATE | PART NO. | DWG NO. | TERMINAL&CONNECTORS | | |
| A0 | 新图面发行 | 19.08.15 | | LINEAR | ANGLES | APPROVED | Nelson | 23.02.23 | 33001H00-NPX-F-HF-NK | ENDE05 | | | |
| A1 | YB20230106004 | 23.01.11 | | 0.0±0.25 | X° REF±6° | DESIGNER | MM | 23.02.23 | TITLE 3.00mm PITCH HOUSING (单排) | | | | |
| | | | | UNIT: MM | 0.00±0.15 | X° ±3° | DRAWN | Fau | 23.02.23 | | | | |
| | | | SIZE: A4 | 0.000±0.08 | X° X' ±2° | | | | | REV | A1 | SHEET | 3/3 |