






进胶点在左/右边



Specifications:  
 Rated Voltage : 30V AC/DC  
 Rated Current : 1A AC,DC(AWG 28#)  
 Withstand Voltage : 200V AC/minute  
 Contact Resistance : 30mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -25°C~+85°C  
 The product using material and processing must conform to the "WU-PZ-A42" HSE technical standard control requirements.

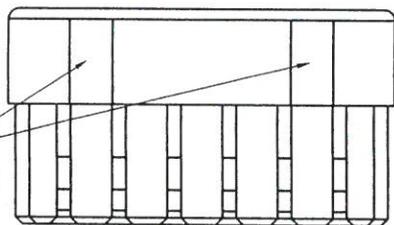

刻模穴号字母A、B...

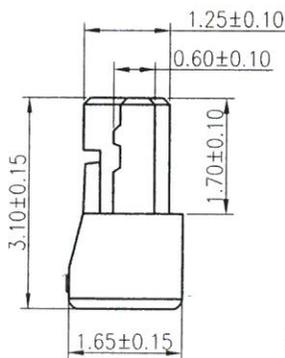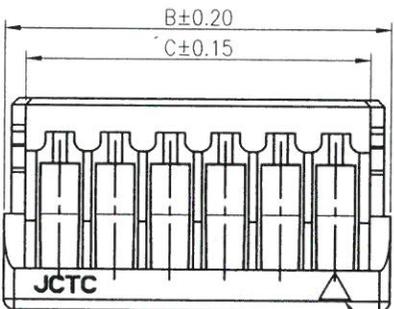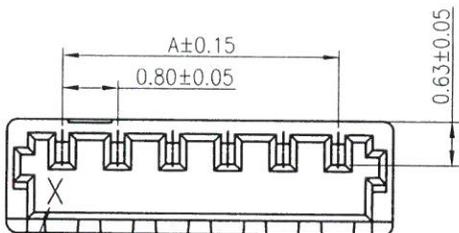

50801H00-NPX-S7-HF  
 ① ② ③④⑤ ⑥


- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ Blank : Natural type
- A: Black
- ⑤ S7 : S7 Type
- ⑥ Hf : Halogen Free



Circuits Part No	Dimensions		
	A	B	C
2P	--	2.40	1.80
3P	1.60	3.20	2.60
4P	2.40	4.00	3.40
5P	3.20	4.80	4.20
6P	4.00	5.60	5.00
7P	4.80	6.40	5.80
8P	5.60	7.20	6.60
9P	6.40	8.00	7.40
10P	7.20	8.80	8.20
11P	8.00	9.60	9.00
12P	8.80	10.40	9.80
13P	9.60	11.20	10.60
14P	10.40	12.00	11.40
15P	11.20	12.80	12.20
16P	12.00	13.60	13.00
17P	12.80	14.40	13.80
18P	13.60	15.20	14.60
19P	14.40	16.00	15.40
20P	15.20	16.80	16.20
21P	16.00	17.60	17.00
22P	16.80	18.40	17.80
23P	17.60	19.20	18.60
24P	18.40	20.00	19.40
25P	19.20	20.80	20.20

第一PIN

0.68±0.05

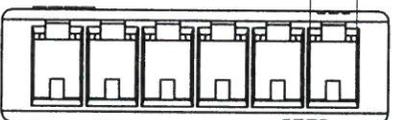

Part No.	Material	Color
50801H00-NP-S7-HF	LCP,UL94V-0	Natural(Beige)
50801H00-NPA-S7-HF	LCP,UL94V-0	Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	
A0	The new version file were released	2023.08.31	LINEAR	ANGLES	1:1			50801H00-NPX-S7-HF	ENDE05	
			0.0±0.25	X° REF±6°	APPROVED					
			0.00±0.15	X° ±3°	DESIGNER					
			UNIT: MM	0.00±0.08	X° X' ±2°	DRAWN	Fau	2023.08.31		
			SIZE: A4							

TITLE  
 0.80mm PITCH HOUSING  
 (无耳朵规格)

REV	AO	SHEET	1/1
-----	----	-------	-----