

Specifications:

Rated Voltage : 250V AC/DC

Rated Current : 5A AC,DC

Withstand Voltage : 1500V AC/minute

Contact Resistance : 10mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -25°C~+85°C


The product using material and processing must conform to the "WI-PZ-142" ISE technical standard control requirements



33001H00-2xNPX-D-HF

- ①
- ②
- ③
- ④
- ⑤
- ⑥

- ① Series No.
- ② H00: Up Contact
- ③ No. of Circuits
- ④ X: Product color
Blank: Natural type
A: Black.....Gray
- ⑤ D: O type
- ⑥ HF: Halogen Free

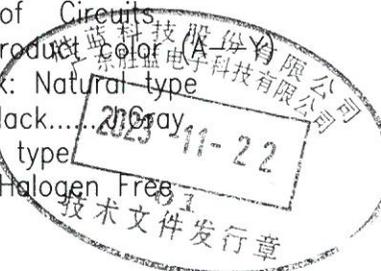

Circuits	Dimensions		
	Part No	A	B
2x4P	9.00	12.85	16.36
2x5P	12.00	15.85	19.36
2x6P	15.00	18.85	22.36
2x7P	18.00	21.85	25.36
2x8P	21.00	24.85	28.36
2x9P	24.00	27.85	31.36
2x10P	27.00	30.85	34.36
2x11P	30.00	33.85	37.36
2x12P	33.00	36.85	40.36


Part No.	Material	Color
33001H00-2xNPJ-D-HF	Nylon 66, UL94V-0	Gray

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
AO	Initial Release	2023. 11. 21	LINEAR	1:1			33001H00-2xNPX-D-HF	ENDE05
			0.0±0.25		APPROVED	2023.11.21		
			X° REF±6°		DESIGNER			
			0.00±0.15		DRAWN			
			X° ±3°					
			0.000±0.08					
			X° X' ±2°					



TITLE
3.00 Pitch HOUSING (双排/卡板式插座)

REV	AO	SHEET	1/2

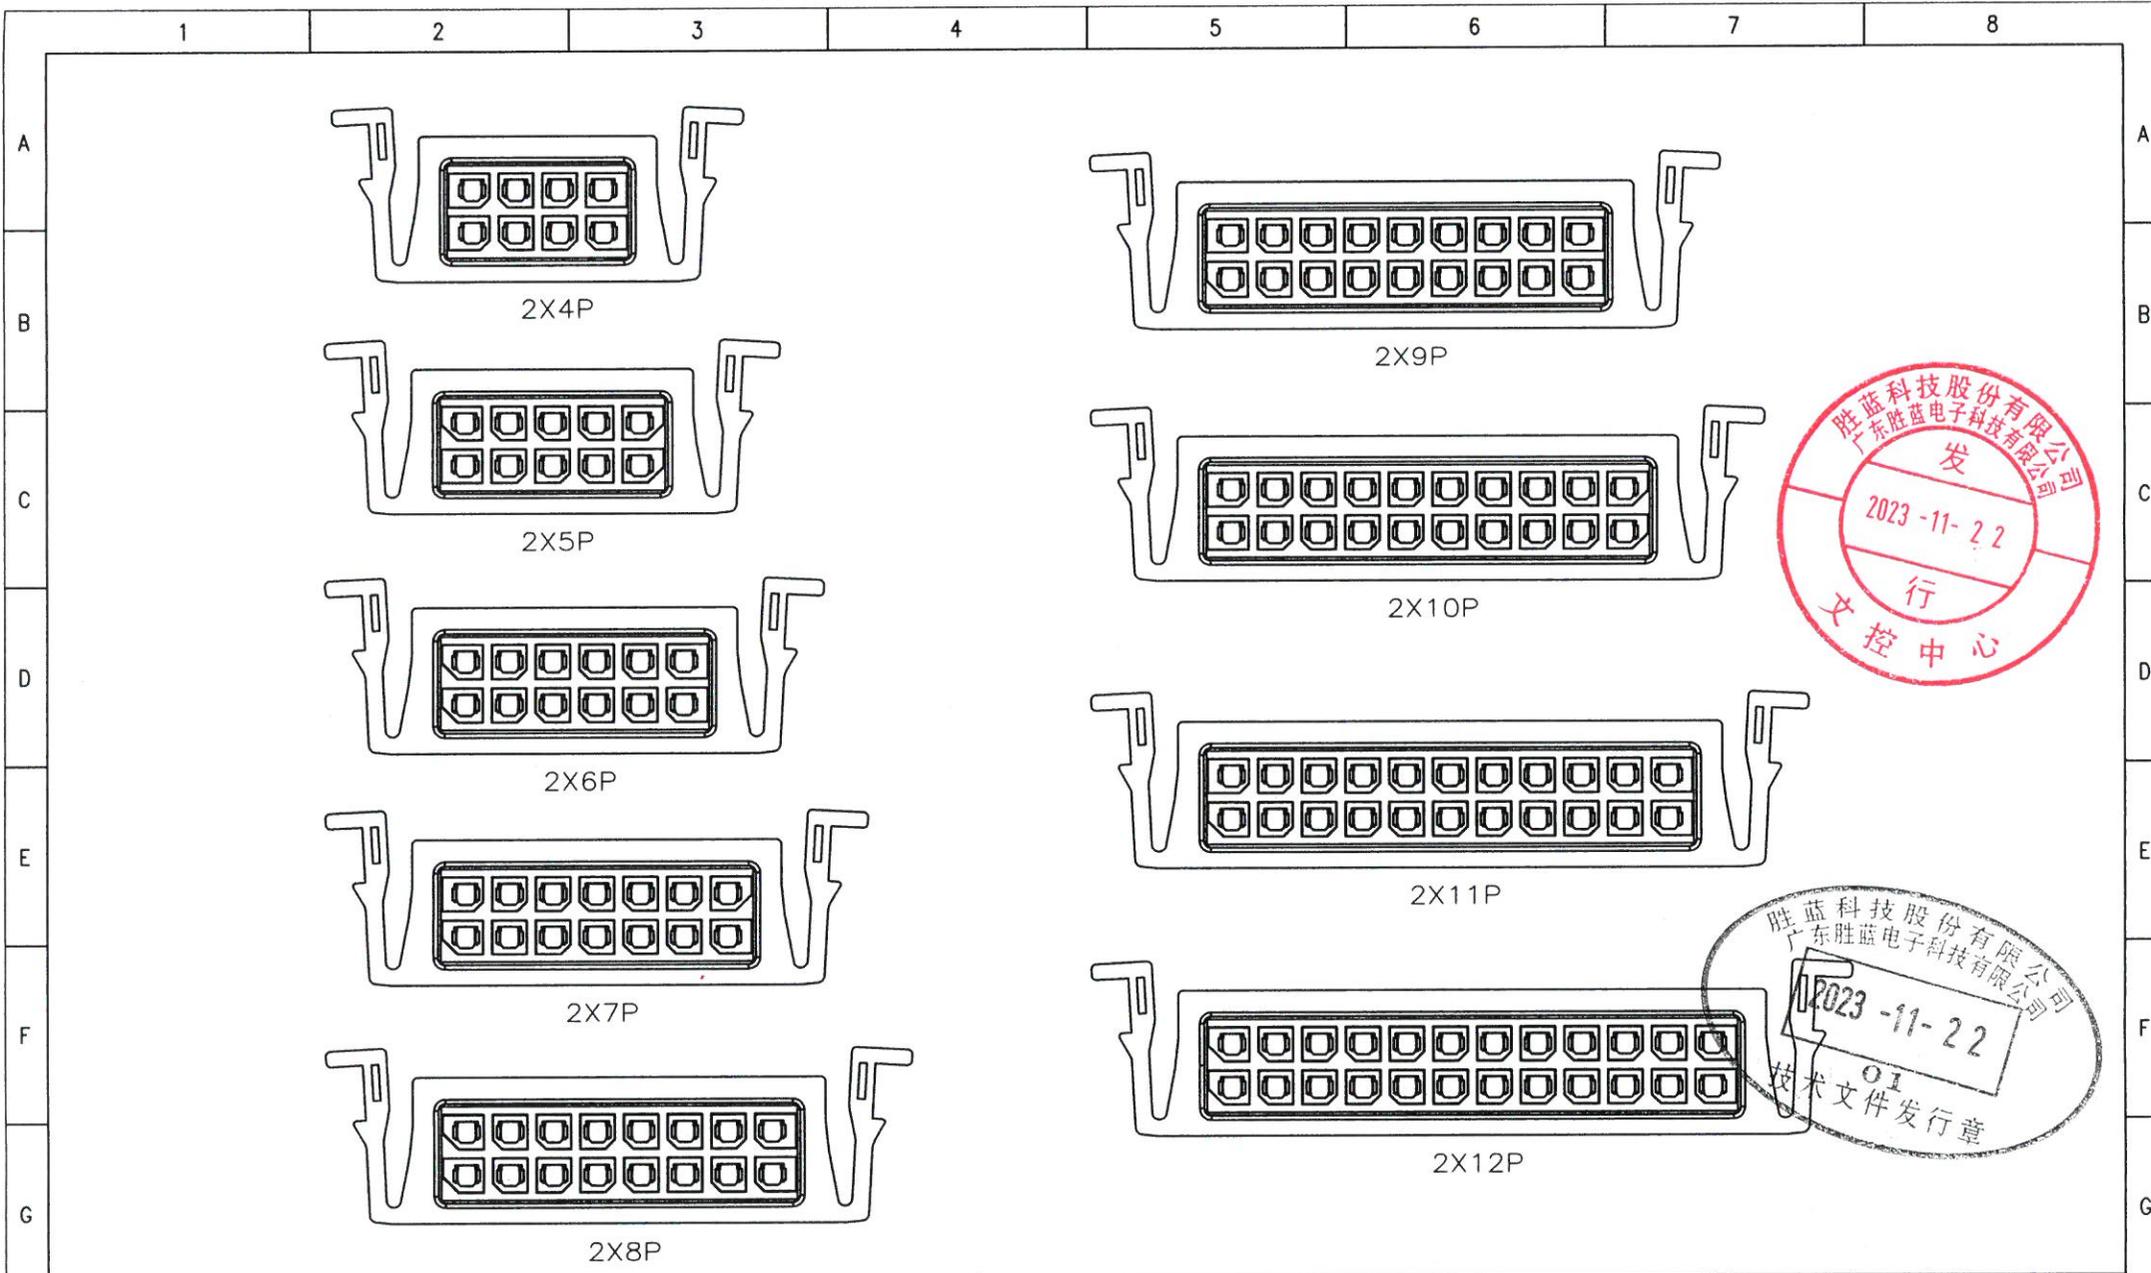

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
AO	Initial Release	2023.11.21		LINEAR	1:1		33001H00-2xNPX-D-HF	ENDE05	
				0.0±0.25	ANGLES				APPROVED
			UNIT: MM	0.00±0.15	X° REF±6°	DESIGNER	2023.11.21	TITLE	
			SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN	OYD	3.00 Pitch HOUSING (双排/卡板式插座)	

JCTC®

REV	AO	SHEET	2/2
-----	----	-------	-----