


1 2 3 4 5 6 7 8


A  
B  
C  
D  
E  
F  
G  
H

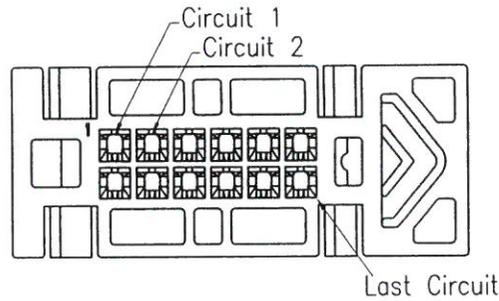



33001H00-2XNPX-HF

① ② ③ ④ ⑤

- ① Series No.
- ② H00: Up Contact
- ③ No. of Circuits
- ④ X: Product color (A--Y)  
Blank: Natural type  
A: Black
- ⑤ HF: Halogen Free

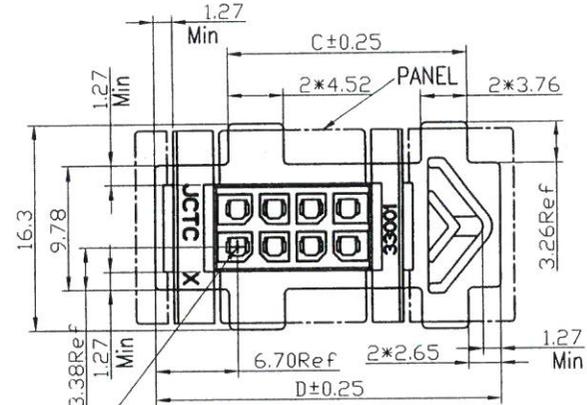


CKT #1 REF LOCATION RECEPTACLE SHOWN MOUNTED IN PANEL

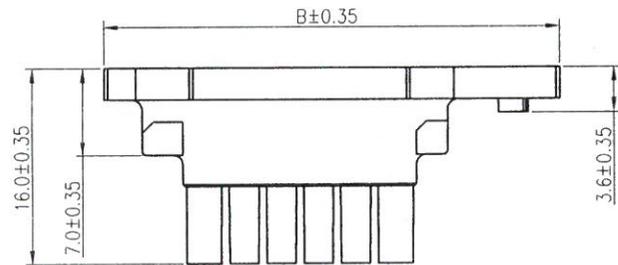

Circuits Part No	Dimensions			
	A	B	C	D
2x2P	3.00	24.70	13.46	22.10
2x3P	6.00	27.80	16.46	25.10
2x4P	9.00	30.80	19.46	28.10
2x5P	12.00	33.80	22.46	31.10
2x6P	15.00	36.80	25.46	34.10
2x7P	18.00	39.90	28.46	37.10
2x8P	21.00	42.90	31.46	40.10
2x9P	24.00	45.90	34.46	43.10
2x10P	27.00	48.90	37.46	46.10
2x11P	30.00	51.90	40.46	49.10
2x12P	33.00	54.90	43.46	52.10


Specifications:  
 Rated Voltage : 250V AC/DC  
 Rated Current : 5A AC,DC  
 Withstand Voltage : 1500V AC/minute  
 Contact Resistance : 10mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C  
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

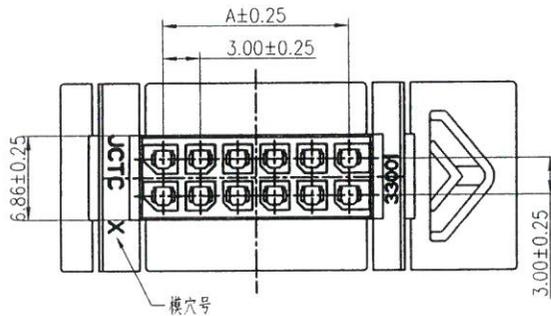


Part No.	Material	Color
33001H00-2XNPA-HF	Nylon 66,UL94V-0	Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
A0	The new version file were released	2023.09.13	LINEAR	ANGLES	1:1			33001H00-2XNPX-HF	ENDE05
			0.0±0.25	X° REF±6°	APPROVED			TITLE 3.00mm PITCH HOUSING (双排/卡板式)	REV AO SHEET 1/3
			0.00±0.15	X° ±3°	DESIGNER				
			0.000±0.08	X° X' ±2°	DRAWN	Fau	2023.09.13		


1 2 3 4 5 6 7 8




2X2P

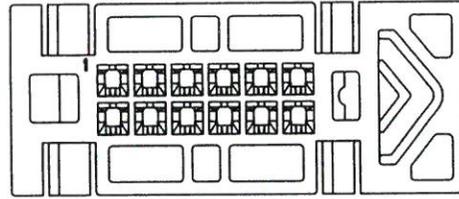


2X6P

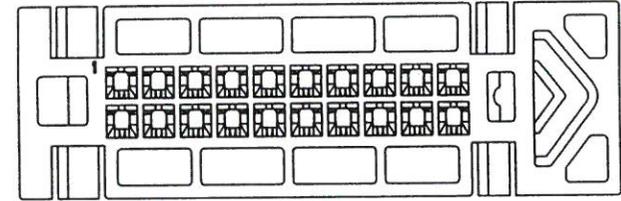


2X10P




2X3P

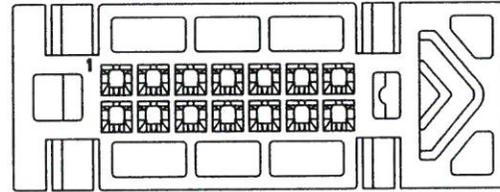


2X7P

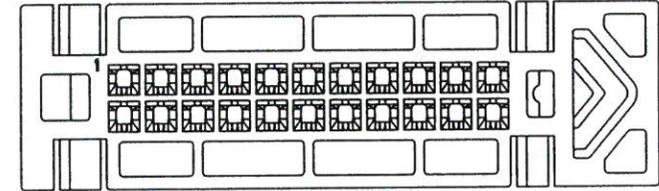


2X11P

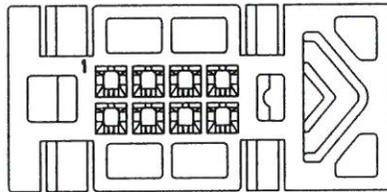


2X4P

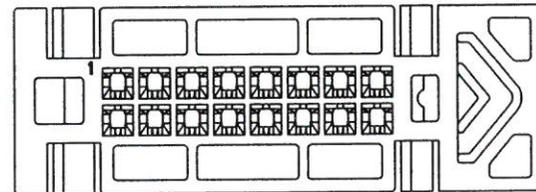


2X8P

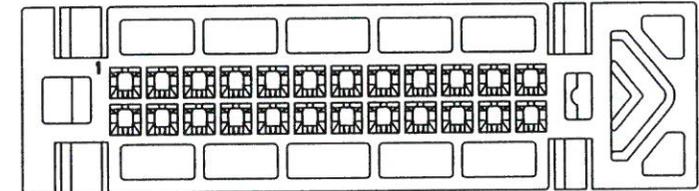

2X12P

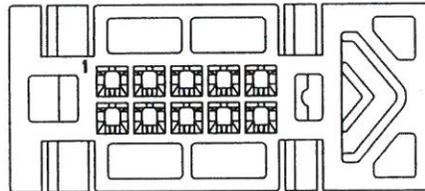

2X5P

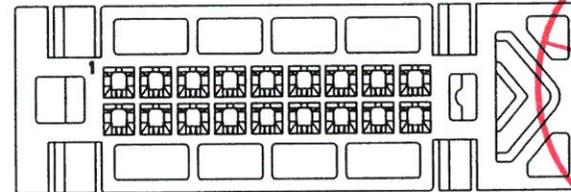

2X9P




REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
A0	The new version file were released	2023.09.13	 UNIT: MM	LINEAR	1:1	 Fau	2023.09.13	33001H00-2XNPX-HF	ENDE05
				0.0±0.25	ANGLES				
			SIZE: A4	0.00±0.15	X° REF±6°	DESIGNER		TITLE	
				0.000±0.08	X° X' ±2°	DRAWN		3.00mm PITCH HOUSING (双排/卡板式)	




1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G


A  
B  
C  
D  
E  
F  
G




2X2P

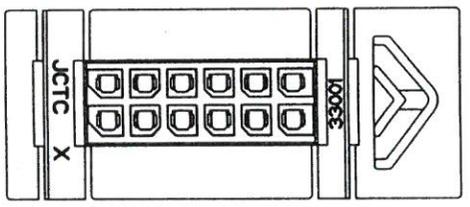


2X6P

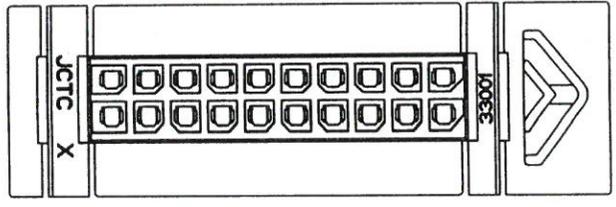


2X10P

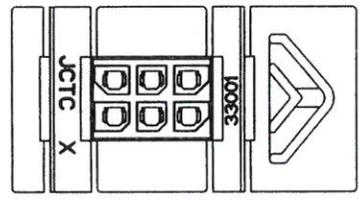


2X3P

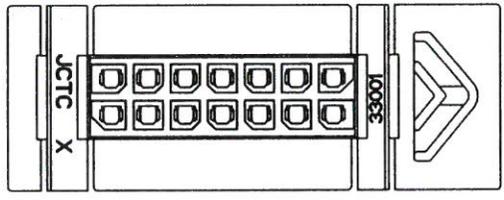


2X7P

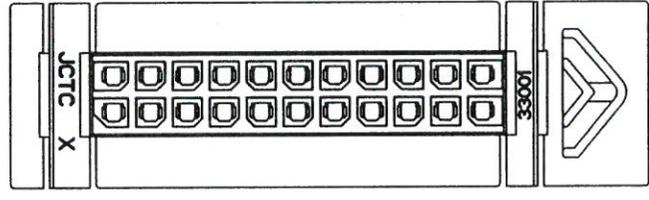


2X11P

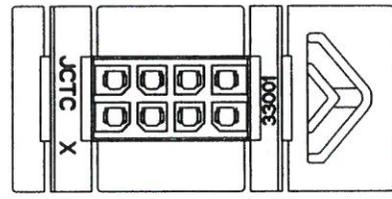


2X4P

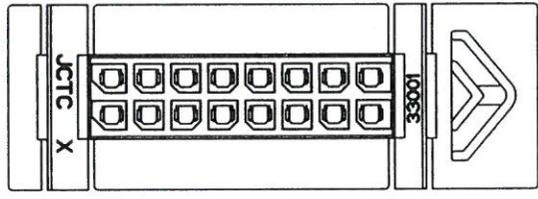


2X8P

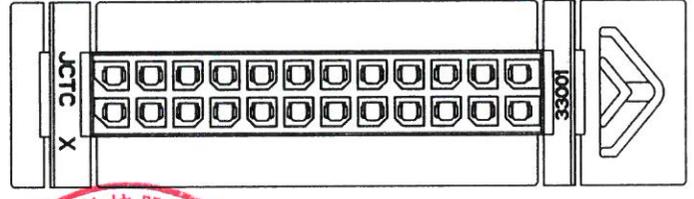

2X12P

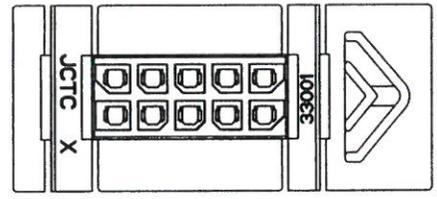

2X5P

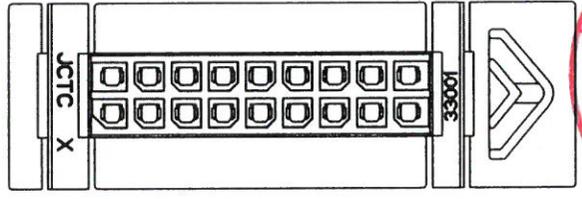

2X9P



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
				LINEAR	ANGLES	APPROVED								
A0	The new version file were released	2023.09.13		0.0±0.25	X° REF±6°			2023.09.13	33001H00-2XNPX-HF	ENDE05	TITLE 3.00mm PITCH HOUSING (双排/卡板式)			
			UNIT: MM	0.00±0.15	X° ±3°	DESIGNER								
			SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN								

1 2 3 4 5 6 7 8

REV A0 SHEET 3/3