

Specifications:

Rated Voltage : 250V AC/DC

Rated Current : 5A AC,DC

Withstand Voltage : 1500V AC/minute

Contact Resistance : 10mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -25°C~+85°C

The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements



33001HMO-2xNPX-D-HF

- ①
- ②
- ③
- ④
- ⑤
- ⑥

- ① Series No.
- ② HMO: Up Contact
- ③ No. of Circuits
- ④ X: Product color (A--Y)
Blank: Natural type
A: Black.....J:Gray
- ⑤ D: C type
- ⑥ HF: Halogen Free




Part No.	Dimensions		
	A	B	C
2x4P	9.00	20.20	13.90
2x5P	12.00	23.20	16.90
2x6P	15.00	26.20	19.90
2x7P	18.00	29.20	22.90
2x8P	21.00	31.20	25.90
2x9P	24.00	33.20	28.90
2x10P	27.00	36.20	31.90
2x11P	30.00	39.20	33.90
2x12P	33.00	41.20	36.90

Part No.	Material	Color
33001HMO-2xNPJ-D-HF	Nylon 66, UL94V-0	Gray

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
AO	Initial Release	2023.11.21	LINEAR 0.0±0.25	1:1	Y	2023.11.21	33001HMO-2xNPX-D-HF	ENDE05
			ANGLES X° REF±6°					
			0.00±0.15		Fan	2023.11.21	TITLE	
			X° ±3°		OYD	2023.11.21	3.00 Pitch HOUSING (双排/卡板式插座)	
			UNIT: MM					
			SIZE: A4					
			0.000±0.08					
			X° X' ±2°					



REV	AO	SHEET	1/2

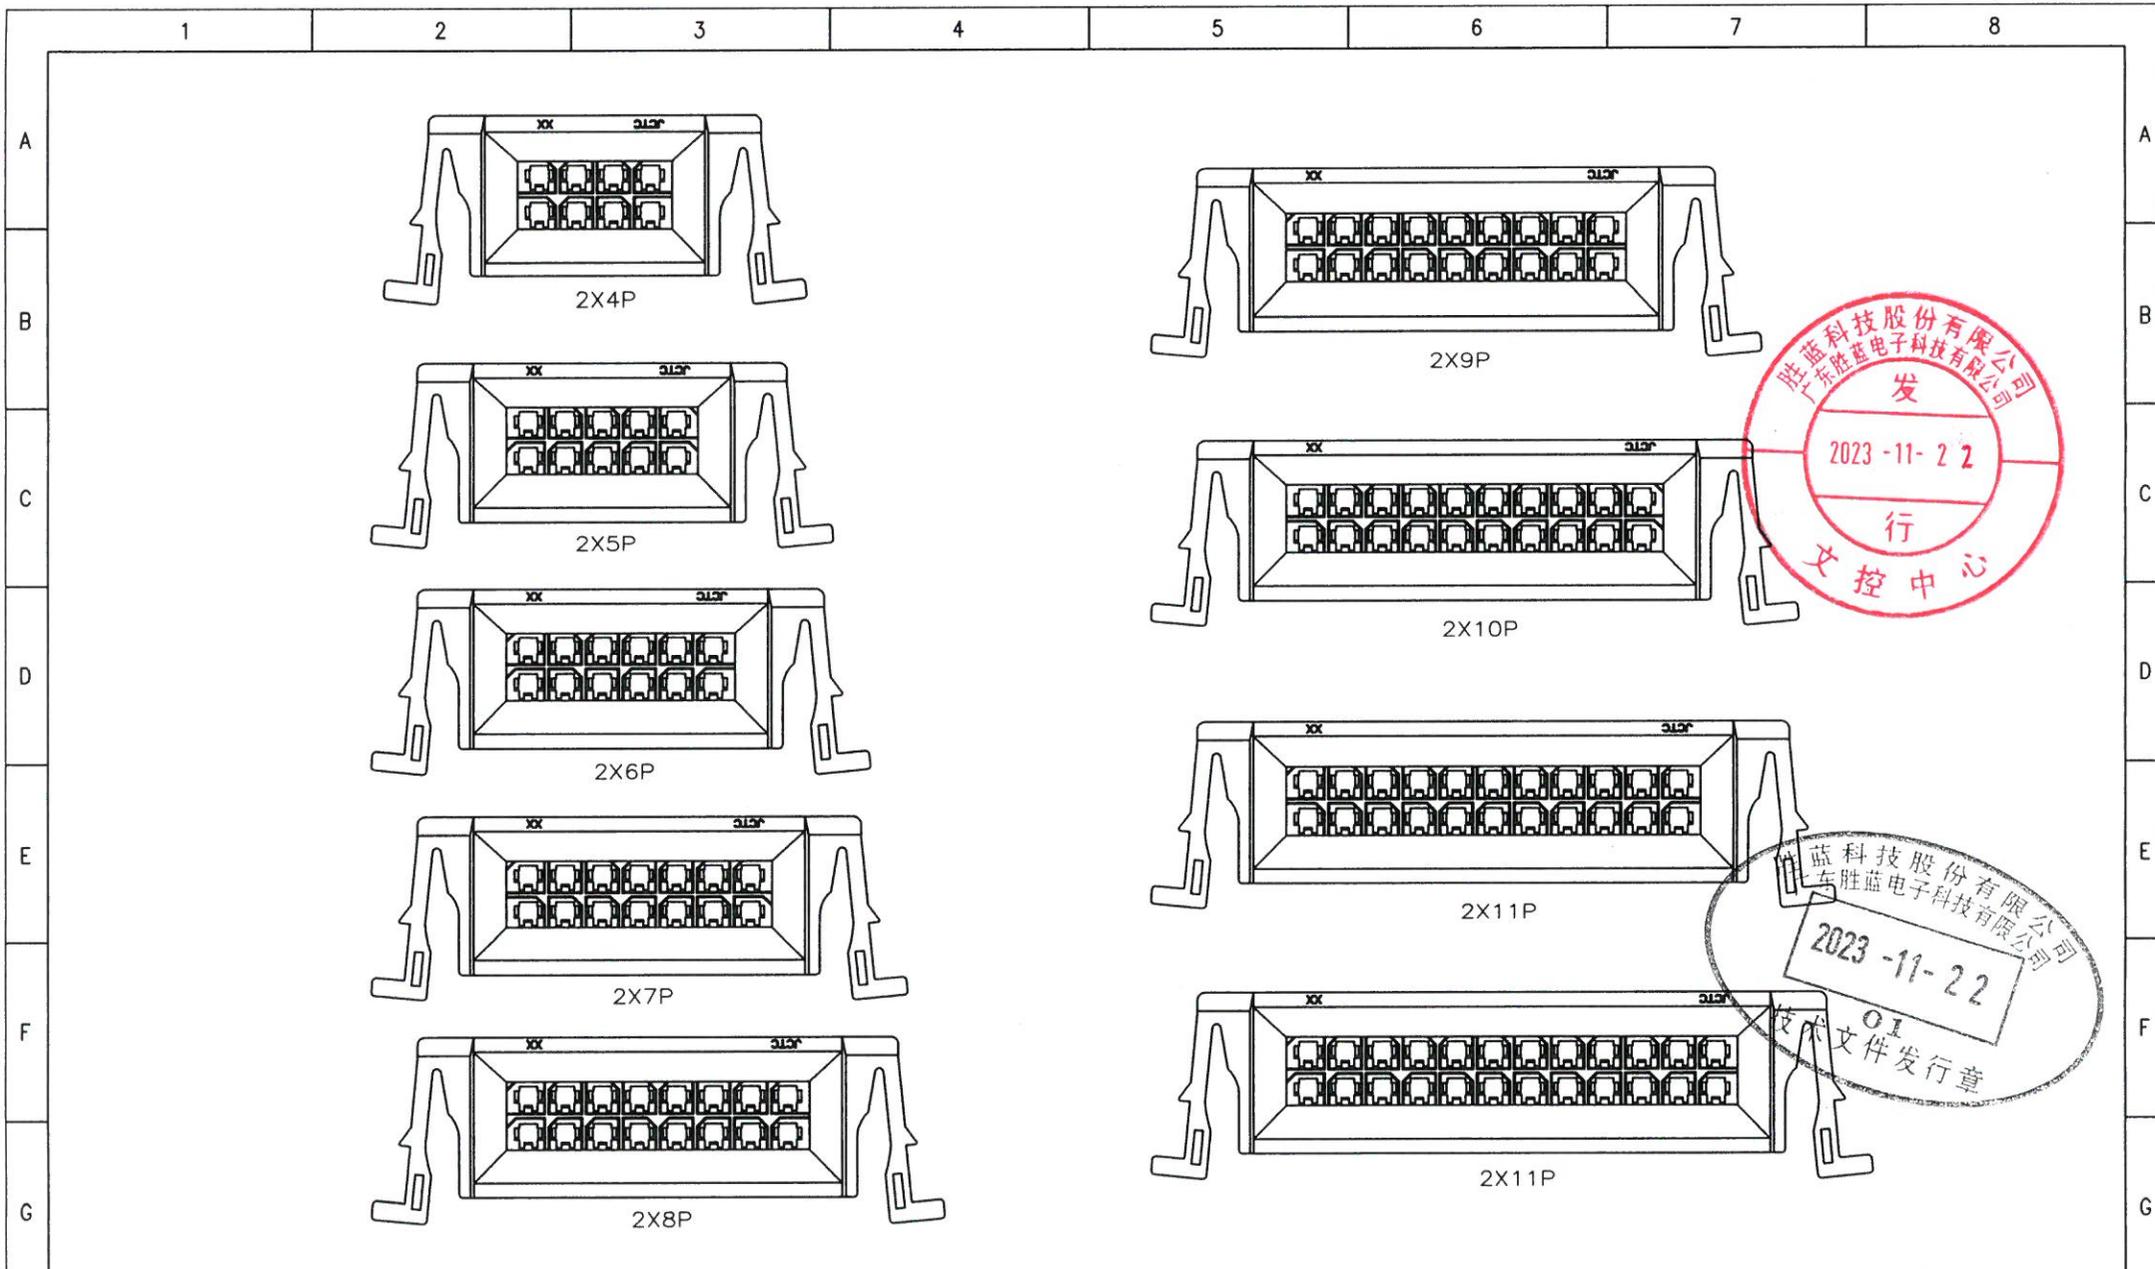

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
AO	Initial Release	2023.11.21	 UNIT: MM SIZE: A4	LINEAR	1:1	 2023.11.21	2023.11.21	33001HMO-2xNPX-D-HF	ENDE05
				ANGLES					
			0.0±0.25	X° REF±6°	DESIGNER	Falk		TITLE	
			0.00±0.15	X° ±3°	DRAWN	OYD		3.00 Pitch HOUSING (双排/卡板式插座)	
			0.000±0.08	X° X' ±2°					

