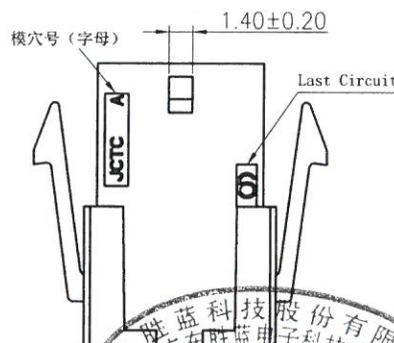
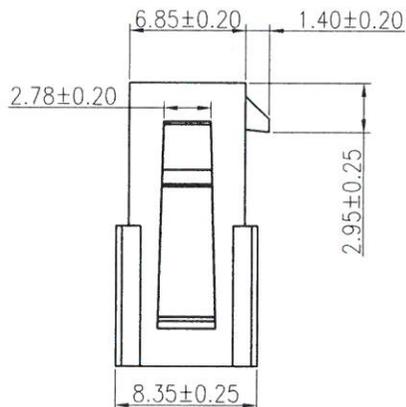
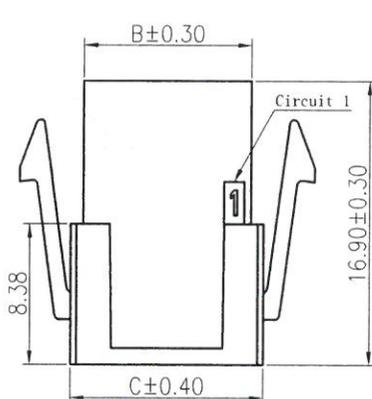
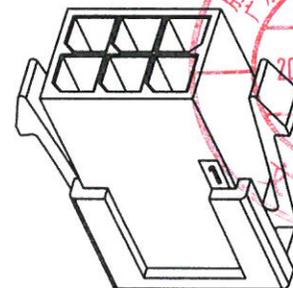
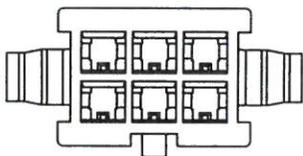


Specifications:  
 Rated Voltage : 250V AC/DC  
 Rated Current : 5A AC,DC  
 Withstand Voltage : 1500V AC/minute  
 Insulation Resistance :1000MΩ(MIN.)  
 Contact Resistance : 10mΩ(MAX.)  
 Temperature Range : -25°C~+85°C  
 The product using material and processing must conform to the\*WI-PZ-142 \*HSF technical standard control requirements



Circuits Part No	Dimensions		
	A	B	C
2X1P	/	3.85	5.35
2X2P	3.00	6.85	8.35
2X3P	6.00	9.85	11.35
2X4P	9.00	12.85	14.35
2X5P	12.00	15.85	17.35
2X6P	15.00	18.85	20.35
2X7P	18.00	21.85	23.35
2X8P	21.00	24.85	26.35
2X9P	24.00	27.85	29.35
2X10P	27.00	30.85	32.35
2X11P	30.00	33.85	35.35
2X12P	33.00	36.85	38.35



Part No.	Material	Color
33001HMO-2XNPA-E-HF	Nylon 66, UL94V-0	黑色
33001HMO-2XNP-E-HF	Nylon 66, UL94V-0	本色

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	<b>JCTC</b> ®			
A0	Initial released	2023.11.15	LINEAR	ANGLES	1:1			33001HMO-2XNPX-E-HF	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED	<i>[Signature]</i>	<i>2023.11.15</i>						
			0.00±0.15	X° ±3°	DESIGNER	<i>Qiqing, Li</i>	<i>2023.11.15</i>	TITLE					
			UNIT: MM	0.00±0.08	X° X' ±2°	DRAWN	Fau	2023.11.15	3.00 Pitch HOUSING (插座两侧带卡扣)				
			SIZE: A4							REV	AO	SHEET	1/2

1

2

3


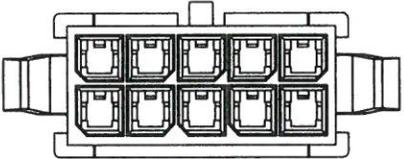
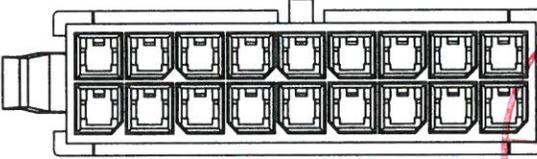
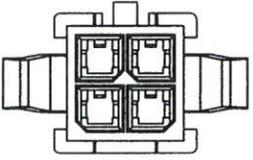
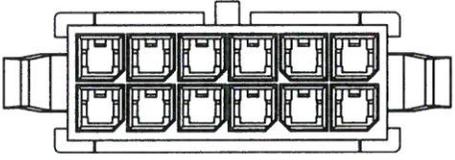
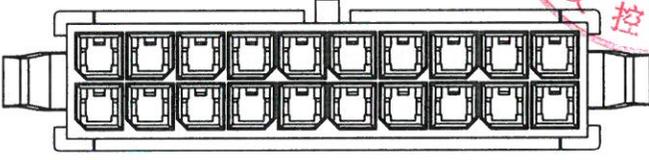
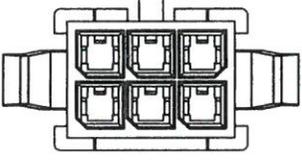
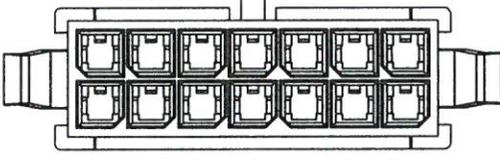
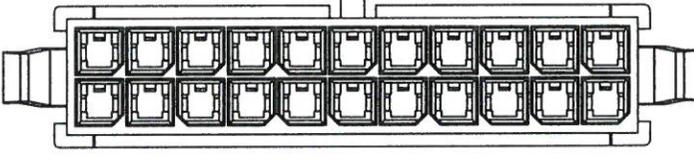
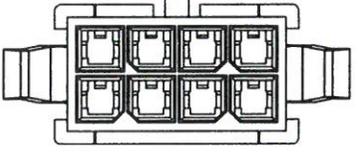
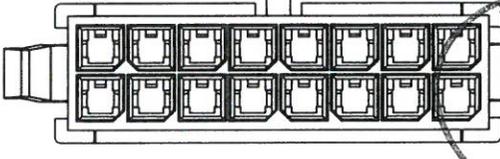
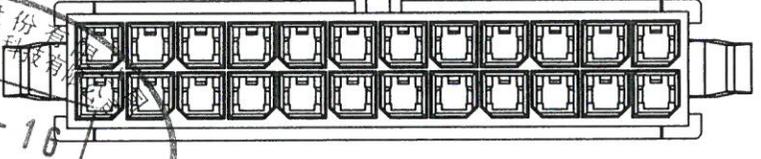
4

5

6

7

8

	1	2	3	4	5	6	7	8				
A	2X1P		2X5P			2X9P						
B												
C	2X2P		2X6P			2X10P						
D												
E	2X3P		2X7P			2X11P						
F												
G	2X4P		2X8P			2X12P						
H												
	REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.		
	A0	Initial released	2023.11.15	LINEAR	ANGLES	APPROVED		2023.11.15	33001HM0-2XNPX-E-HF	ENDE05		
				0.0±0.25	X° REF±6°	DESIGNER	0.9ing.Li	2023.11.15	TITLE			
			UNIT: MM	0.00±0.15	X° ±3°	DRAWN	Fau	2023.11.15	3.00 Pitch HOUSING (插座两侧带卡扣)			
			SIZE: A4	0.000±0.08	X° X' ±2°				REV	AO	SHEET	2/2
	1	2	3	4	5	6	7	8				

