
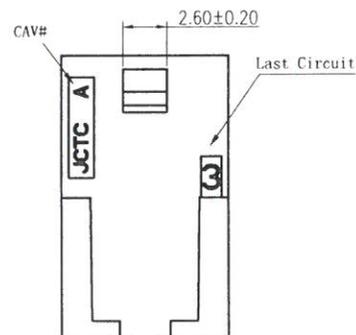
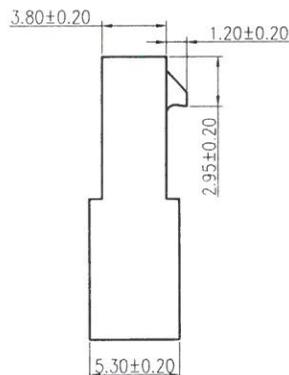


Specifications:

Rated Voltage : 250V AC/DC
 Rated Current : 5A AC,DC
 Withstand Voltage : 1500V AC/minute
 Insulation Resistance : 1000MΩ(MIN.)
 Contact Resistance : 10mΩ(MAX.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the *WI-PZ-142 *HSF technical standard control requirements

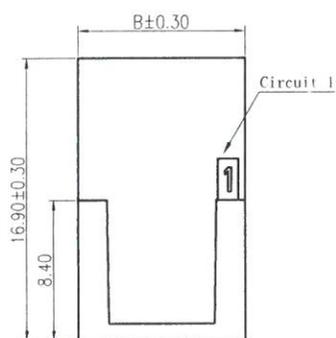

33001HMO-NPX-A-HF

① ② ③④⑤⑥


- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type
- ⑤ A : A Type
- ⑥ HF : Halogen Free

Circuits Part No	Dimensions	
	A	B
2P	3.00	6.85
3P	6.00	9.85
4P	9.00	12.85
5P	12.00	15.85
6P	15.00	18.85
7P	18.00	21.85
8P	21.00	24.85
9P	24.00	27.85
10P	27.00	30.85
11P	30.00	33.85
12P	33.00	36.85



Part No.	Material	Color
33001HMO-NPA-A-HF	Nylon 66, UL94V-0	Black
33001HMO-NP-A-HF	Nylon 66, UL94V-0	Natural

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	Initial released	2024.03.11		LINEAR	ANGLES	1:1						APPROVED		
			0.0±0.25	X° REF±6°		DESIGNER	2024.03.11	33001HMO-NPX-A-HF	ENDE05					
			UNIT: MM	X° ±3°		DRAWN	Fau	TITLE						
			SIZE: A4	X° X' ±2°				3.00 Pitch HOUSING CONNECTOR						
											REV	AO	SHEET	1/2

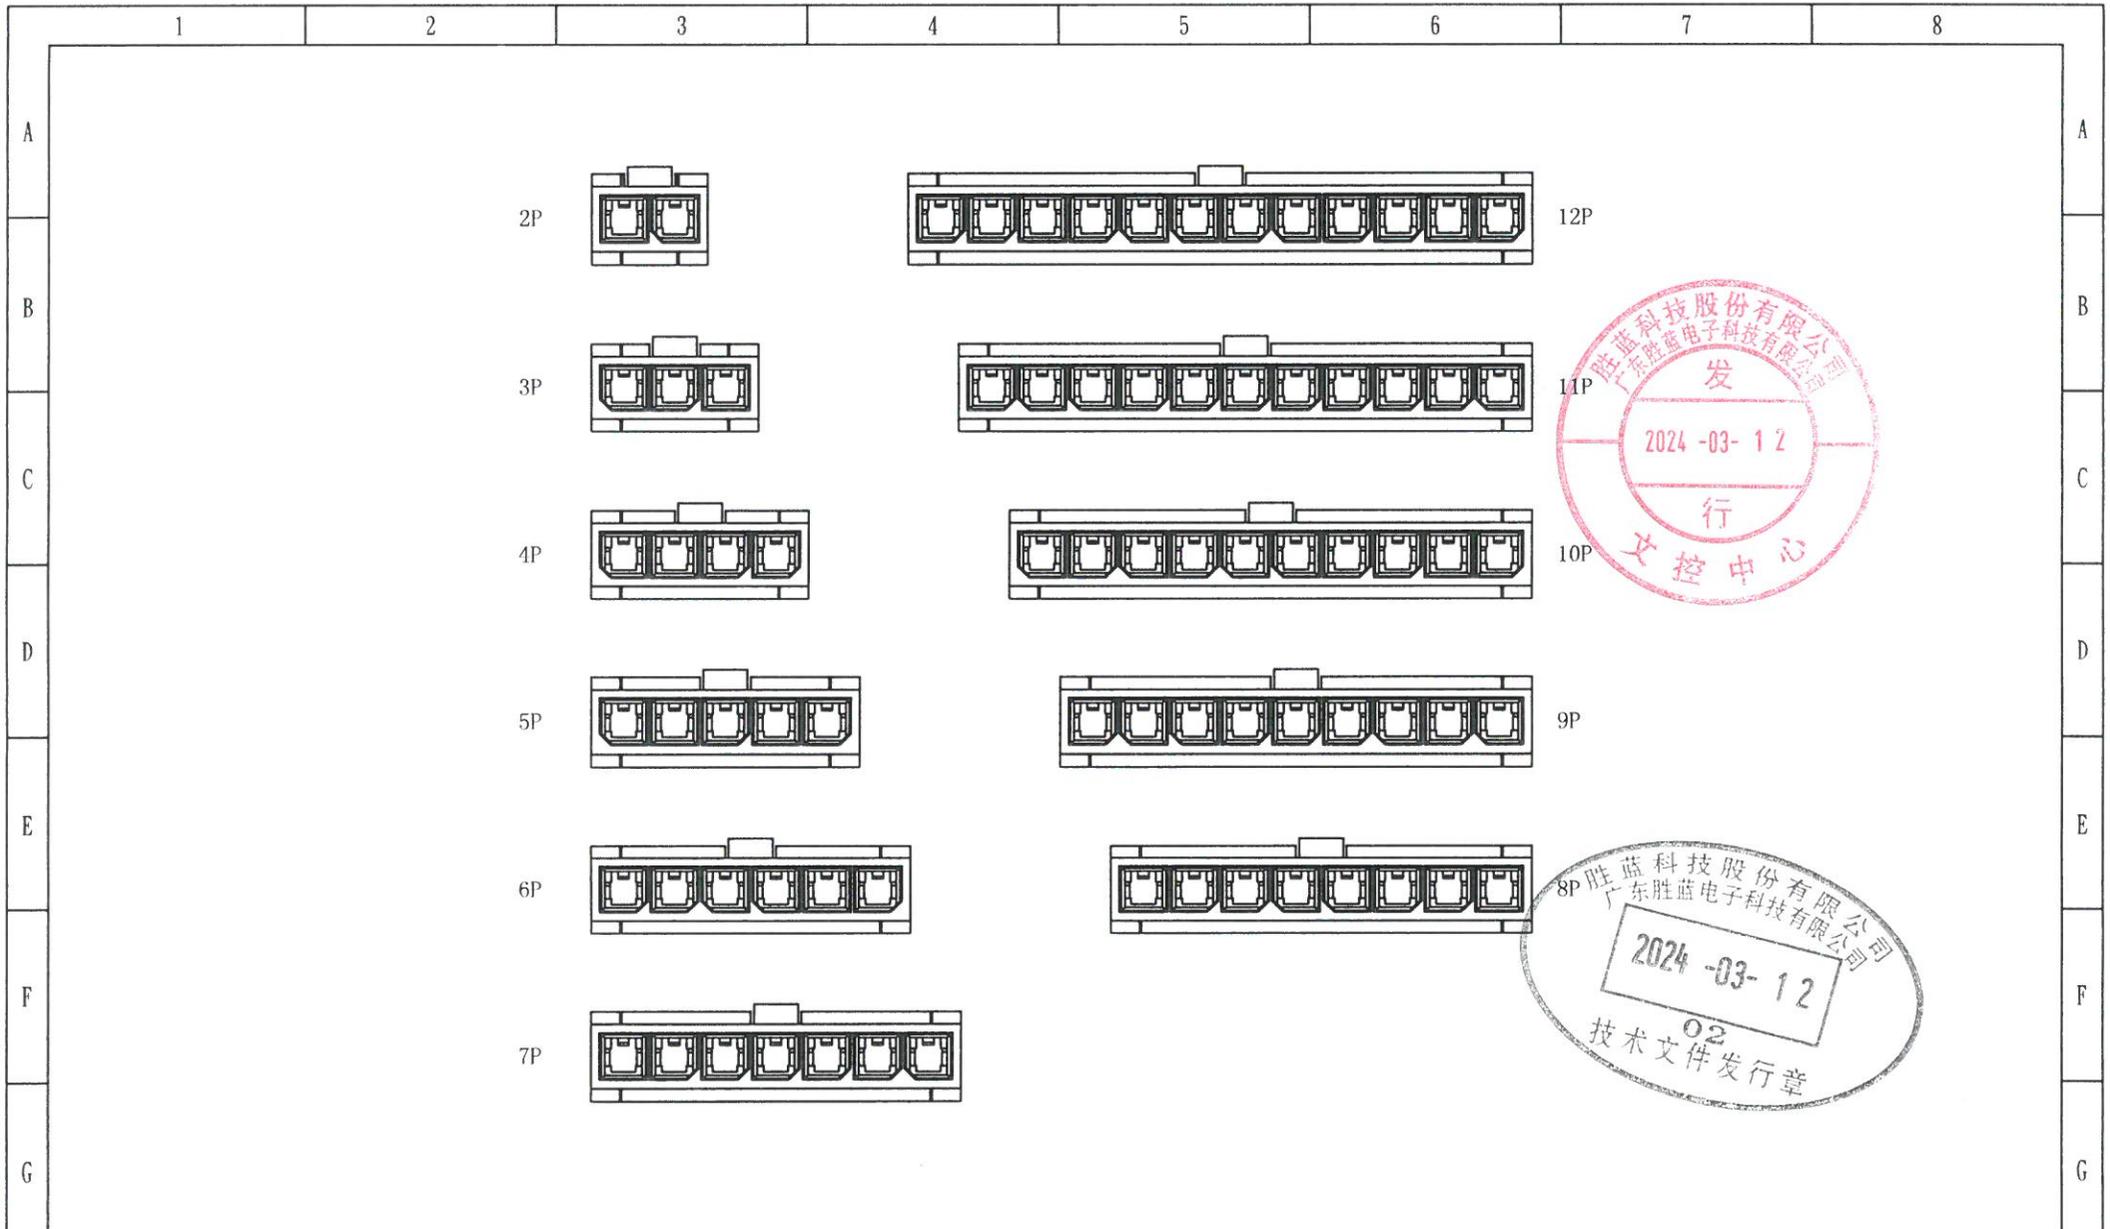

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME <i>Fau</i>	DATE 2024.03.11	PART NO.	DWG NO.	
A0	Initial released	2024.03.11		LINEAR	ANGLES	APPROVED			33001HM0-NPX-A-HF	ENDE05	
			0.0±0.25	X° REF±6°	DESIGNER	TITLE					
			0.00±0.15	X° ±3°	DRAWN	3.00 Pitch HOUSING CONNECTOR					
			UNIT: MM	0.00±0.15	X° ±3°						
			SIZE: A4	0.000±0.08	X° X' ±2°		Fau	2024.03.11			
											REV
											AO
											SHEET
											2/2