
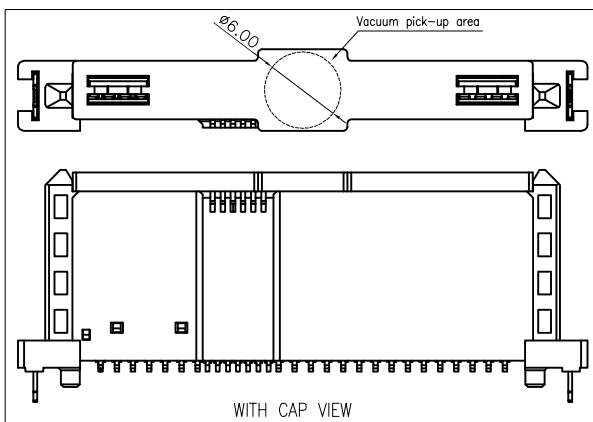

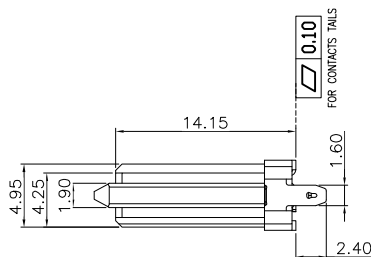
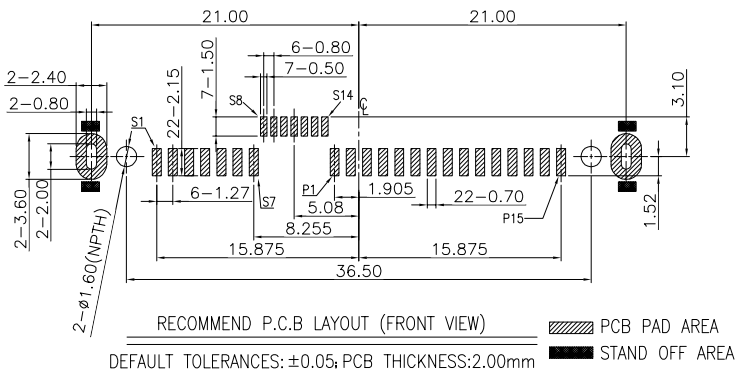

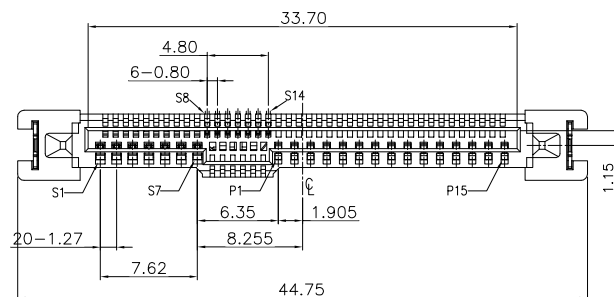


RoHS 2.0+HF

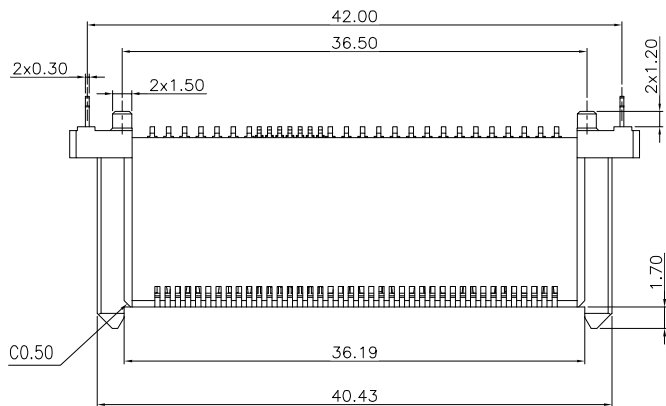

NOTES:


- 1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0, Black.
CONTACT: PHOSPHOR BRONZE,T=0.25mm.
SOLDER TAB: BRASS,T=0.30mm.
CAP: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0, Black.
- 2.FINISH:
CONTACT:SELECTIVE GOLD PLATING IN THE CONTACT AREA
AND SELECTIVE TIN PLATING IN THE SOLDER TAIL
AREA,WITH NICKEL UNDER PLATING OVERALL.
METAL CLIP:TIN PLATING WITH
NICKEL PLATING OVERALL.
3. ELECTRICAL SPECIFICATION:
RATED CURRENT: 1.5A PER PIN POWER TERMINAL;
CONTACT IMPEDANCE: MAXIMUM 30mΩ (INITIAL STAGE);
OPERATING TEMPERATURE: -40°C ~ +85°C.
- 4.SUPPORT SAS 4.0

8 08-F V S 05 29 A-30
1 2 3 4 5 6 7 8 9


- 1.HIGH SPEED CONNECTOR
- 2.PITCH:08:0.8pitch
- 3.F:FEMALE
- 4.V:180°
- 5.S:SMT
- 6.05:TYPE
- 7.PINS NO. 29:29PINS
- 8.A:LCP BLACK
- 9Contact Area plating on contacts
30: Au 30u"

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	26.02.25		LINEAR	ANGLES	1:1	APPROVED	Jackie Tan	26.02.25	808-FVS0529A-30				
				0.0±0.30	X° REF±6°		DESIGNER	Daniel Dong	26.02.25	TITLE				
				0.00±0.25	X° ±3°		DRAWN	Girder.Liang	26.02.25	SAS V/T 29PIN FEMALE				
			UNIT: MM	0.000±0.10	X° X' ±2°						REV	A0	SHEET	1/2


环保物料

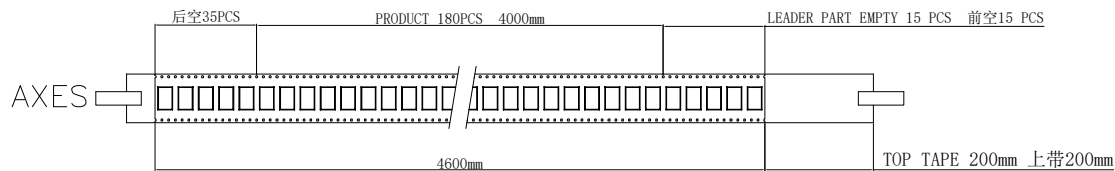



TAKING OUT DIRECTION

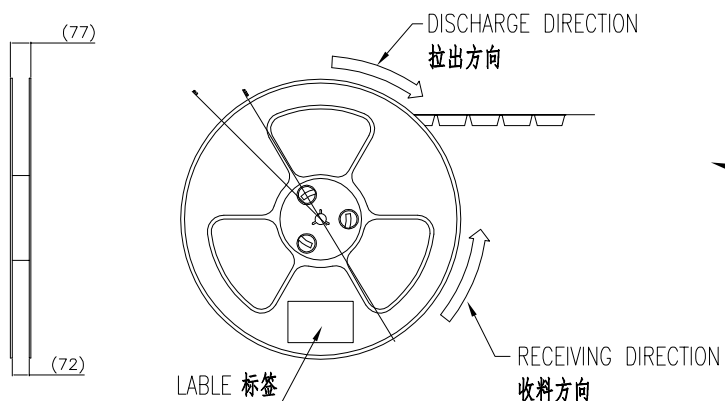

COVER TAPE PEEL STRENGTH:20~120g
上带剥离力量: 20~120g
速度 PEEL SPEED:300mm/minute

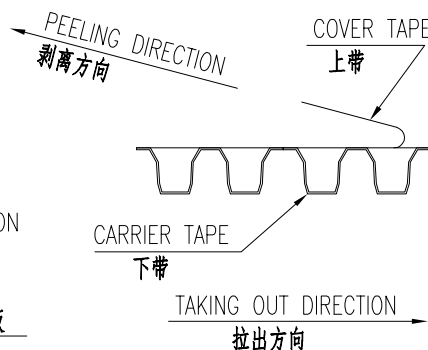

SINGLE HOLE: NONE HOLE SIDE
单孔: 贴无链孔侧
DOUBLE HOLE: ELLIPTICAL HOLE SIDE
双孔: 贴椭圆孔侧

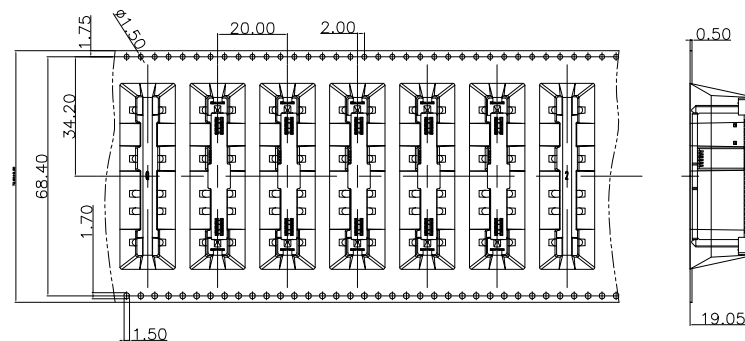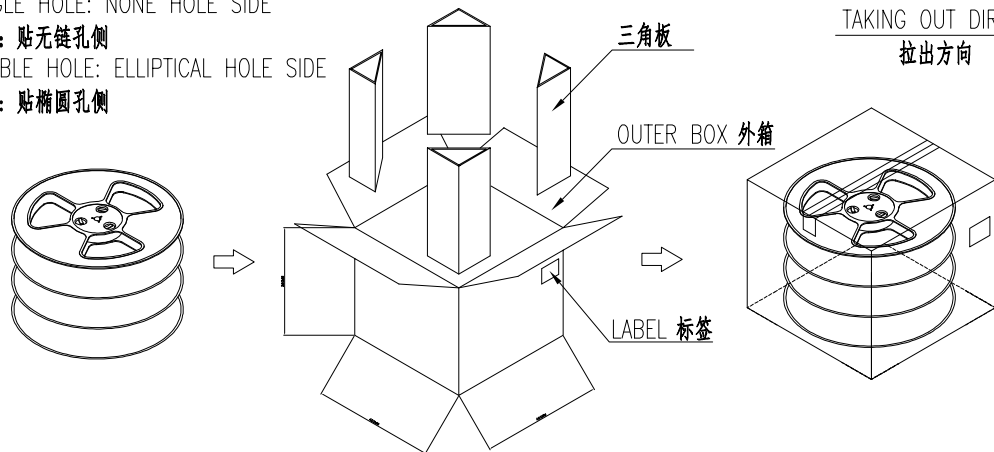

TAKING OUT DIRECTION

REEL/PCS	CARTON/R	CARTON/PCS
180	3	540

- NOTE:
- CARRIER CAMBER IS WITHIN 1MM IN 100mm ;
带长100mm内容许弯曲度1mm;
 - 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2 mm;
圆孔十个孔距离累计允许公差为 ± 0.2 mm
 - CARRIER TAPE MATERIAL FOR PS ;
下带材质为PS材质; COLOR颜色: BLACK黑色;
 - BRACER保护带: COLOR颜色:NATURAL透明色;厚度0.40mm最小;
 - THICKNESS=0.50 ± 0.05 ; 材料厚度为0.50 ± 0.05 mm;
 - COVER TAPE上带: 冷风自粘带;

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	新图面发行	26.02.25		LINEAR	ANGLES	APPROVED	Jackie Tan	26.02.25	808-FVS0529A-30	ENDE05				
			UNIT: MM	0.0±0.30	X° REF±6°	DESIGNER	Daniel Dong	26.02.25	TITLE		REV	AO	SHEET	2/2
				0.00±0.25	X° ±3°	DRAWN	Girder.Liang	26.02.25						
				SIZE: A4	0.000±0.10	X° X' ±2°								