


SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

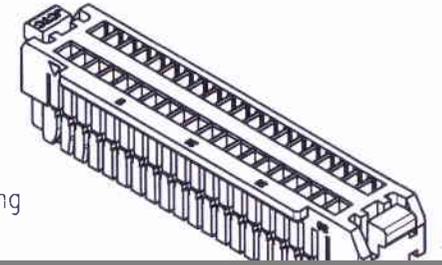

Circuit 1

3.95±0.05

5.70±0.25

5.35±0.25

11006H00-2xNPX-L-HF

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)
Blank : Natural type
- ⑤ L : With Lock
- ⑥ HF : Halogen Free

内部
技术文件发行章

△	11006H00-2xNP-L	PBT,UL94V-0	2x12P
△	11006H00-2xNP-L-HF		
△	11006H00-2xNPA-L	PBT,UL94V-0	
△	11006H00-2xNPA-L-HF	Nylon66,UL	

REVISION RECORD

	12.09.17		
	15.01.28		0.0±0.25
HR1611090215	17.01.18	UNIT: MM	0.00±0.15
依180206036增加规格			0.000±0.08

JGTC® 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

PART. NO:
11006H00-2xNPX-L

TITLE:
SHLDP DUAL ROW 1.00 PITCH HOUSING

SHEET: 1/1