

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C

D

E

F


G

H








52006W00-3PA-5C-HF-NK-01

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② W90 : Side Contact  
W00 : Up Contact
- ③ No. of Circuits
- ④ A: Black
- ⑤ 5C: Gold-plated 3u"
- ⑥ HF: Halogen Free
- ⑦ NK: No Mark
- ⑧ 01: 01 Type








Specifications:  
 Rated Voltage : 30V AC/DC  
 Rated Current : 3A AC/DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 30mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -20°C~+80°C  
 Durability : 400 cycles  
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

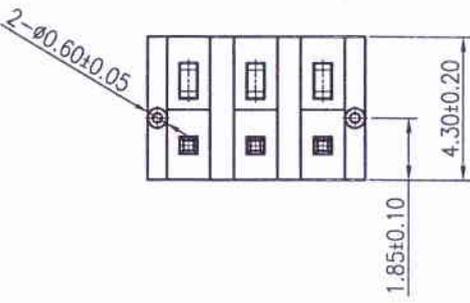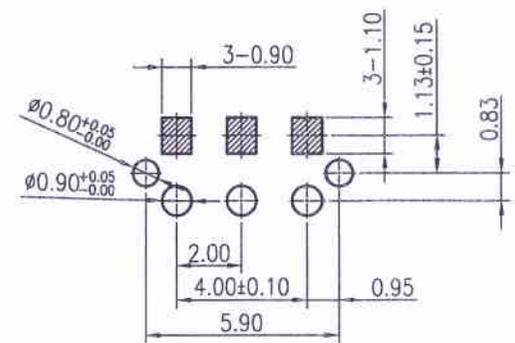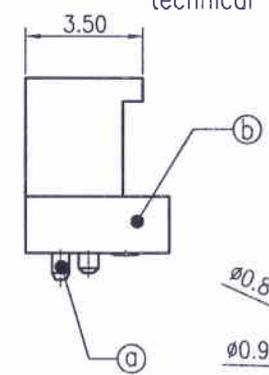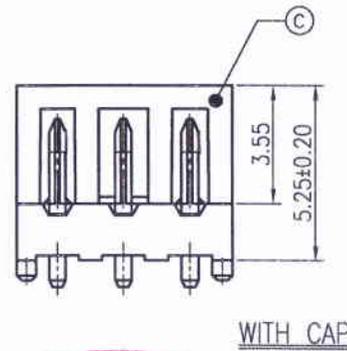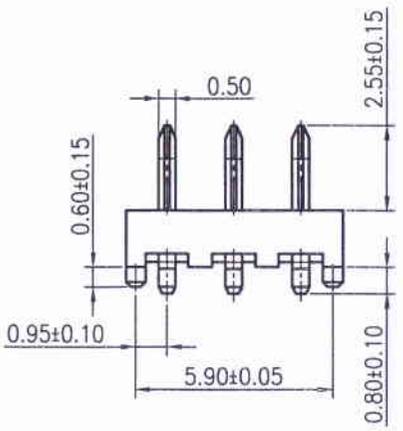

Part No.	No.	Description	Material	Color
52006W00-3PA-5C-HF-NK-01	a	PIN Terminal	Brass/Gold-plated 3u" on contact area, Gold-flash on solder area	—
	b	Housing	LCP, UL94V-0	Black
	c	CAP	LCP, UL94V-0	Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO: 52006W00-3PA-5C-HF-NK-01
A0	新图面发行	17.08.16	LINEAR: 0.0±0.25 ANGLES: X° REF±6° 0.00±0.15 X° ±3° 0.000±0.08 X° X'±2°	1:1	APPROVED: [Signature] DESIGNER: [Signature] DRAWN: 卢小锋	17.08.16		
							TITLE: 2.00mm PITCH 电池座	REV: A0 SHEET: 1/2

1 2 3 4 5 6 7 8

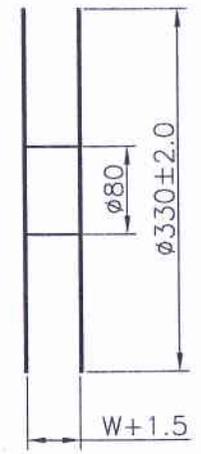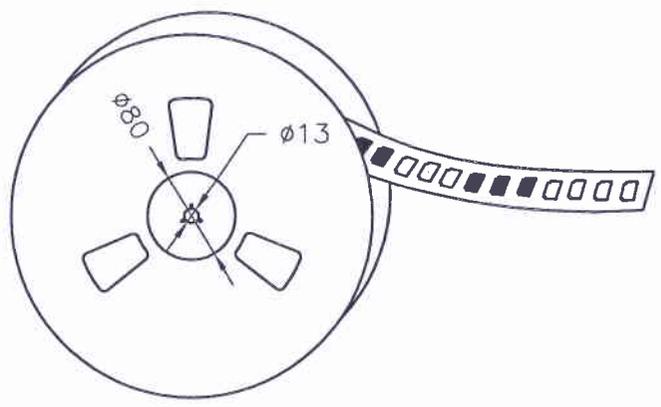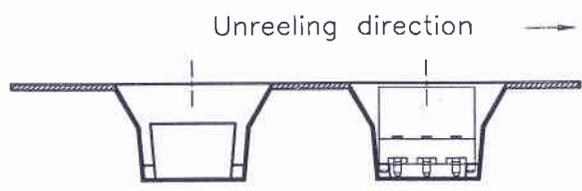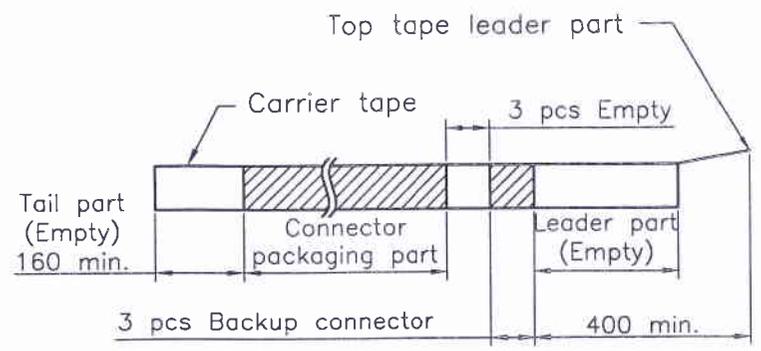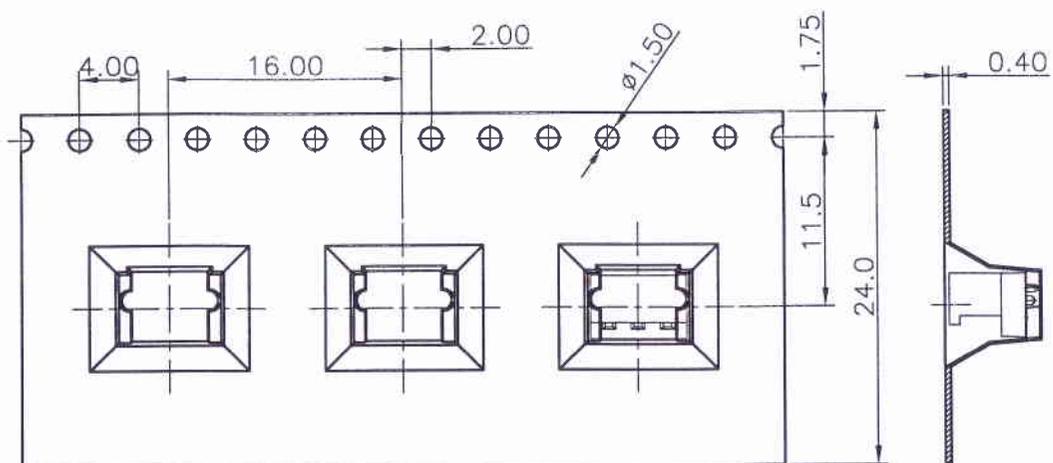

Number of Contacts	Q'ty/Reel
3P	500PCS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	<b>JCTC</b> ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
A0	新图面发行	17.08.16		LINEAR	ANGLES	1:1	APPROVED	16/8-17		52006W00-3PA-5C-HF-NK-01
			UNIT: MM	0.0 ± 0.25	X° REF ± 6°	DESIGNER	17.08.16		DWG. NO:	
			SIZE: A4	0.00 ± 0.15	X° ± 3°	DRAWN	卢小锋	17.08.16	ENDE05	
				0.000 ± 0.08	X° X' ± 2°				REV: A0	SHEET: 2/2
									TITLE:	2.00mm PITCH 电池座