

52006W00-3PA-5C-HF-NK-01

① ② ③④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ A: Black
- ⑤ 5C: Gold-plated 3u"
- ⑥ HF: Halogen Free
- ⑦ NK: No Mark
- ⑧ 01: 01 Type

Specifications:

Rated Voltage : 30V AC/DC

Rated Current : 3A AC,DC

Insulation Resistance : 1000 MΩ (min.)

Dielectric Resistance :

Surge Current Resistance (IN.)

Temperature Range : -20°C~+80°C

Durability : 400 cycles

The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

工程部
技术文件发行章

Recommended P.C.Board Layout

52006W00-3PA-5C-HF-NK-01

Gold-plated 3u" on contact
area,Gold-flash on solder area

LCP,UL94V-0

LCP,UL94V-0

新图面发行

0.0±0.25


UNIT: MM 0.00±0.15

0.000±0.08

JCTC® 胜蓝科技股份有限公司 52006W00-3PA-5C-HF-NK-01
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

TITLE:

2.00mm PITCH 电池座

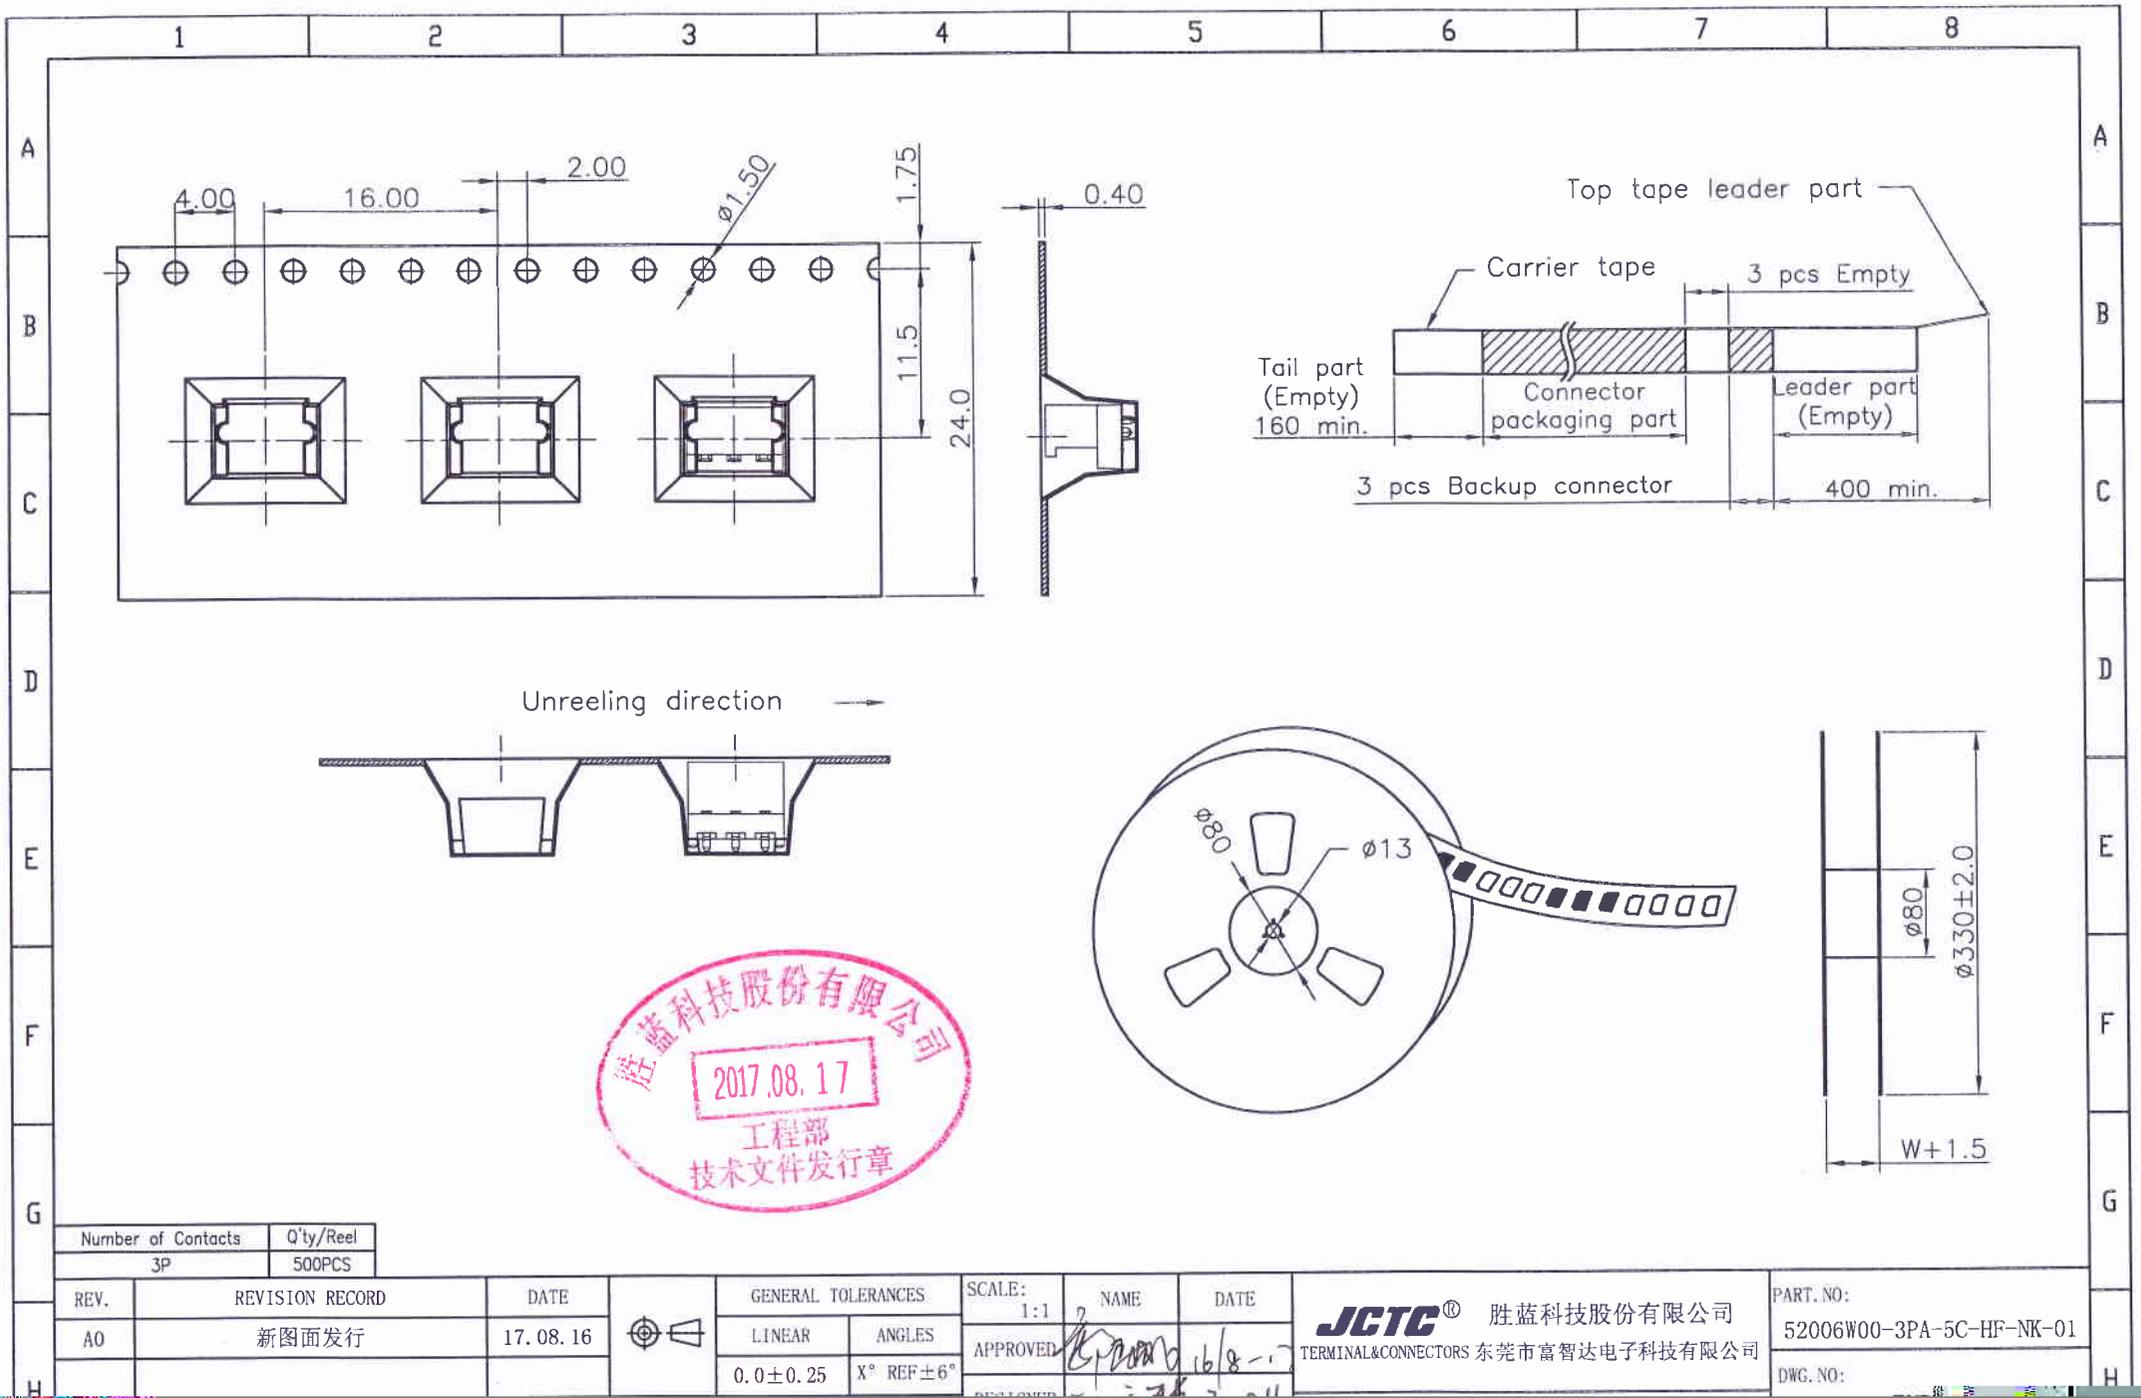

Number of Contacts	Q'ty/Reel
3P	500PCS

REV.	REVISION RECORD	DATE
A0	新图面发行	17.08.16



GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.25	X° REF±6°

SCALE:	NAME	DATE
1:1		
APPROVED:	[Signature]	

JCTC® 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

PART. NO:	52006W00-3PA-5C-HF-NK-01
DWG. NO:	

UNIT: MM 0.00±0.15
 0.000±0.08

TITLE: 2.00mm PITCH 电池座
 17.08.16

REV: A0 SHEET: 2/2