

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

52006W00-3PA-5C-HF-NK-02-R

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② W90 : Side Contact  
W00 : Up Contact
- ③ No. of Circuits
- ④ A: Black
- ⑤ 5C: Gold-plated 3u"
- ⑥ HF: Halogen Free
- ⑦ NK: No Mark
- ⑧ 02: 02 Type
- ⑨ R : Reel pack

Specifications:

Rated Voltage : 30V AC/DC  
 Rated Current : 3A AC,DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 30mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -20°C~+80°C  
 Durability : 400 cycles  
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

WITH CAP

股份

018.11.0

Recommended P.C.Board Layout

Material  
 Brass/Gold-plated 3u" on contact area, Gold-flash on solder area  
 LCP,UL94V-0  
 LCP,UL94V-0

PIN Terminal

52006W00-3PA-5C-HF-NK-02-R

REVISION RECORD

18.11.06

SCALE:  
1:1

0.0±0.25

**JCTC**® 胜蓝科技股份有限公司  
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司


52006W00-3PA-5C-HF-NK-02-R

SIZE: A4 0.000±0.08

18.11.06

2.00mm PITCH 电池座

SHEET: 1/2

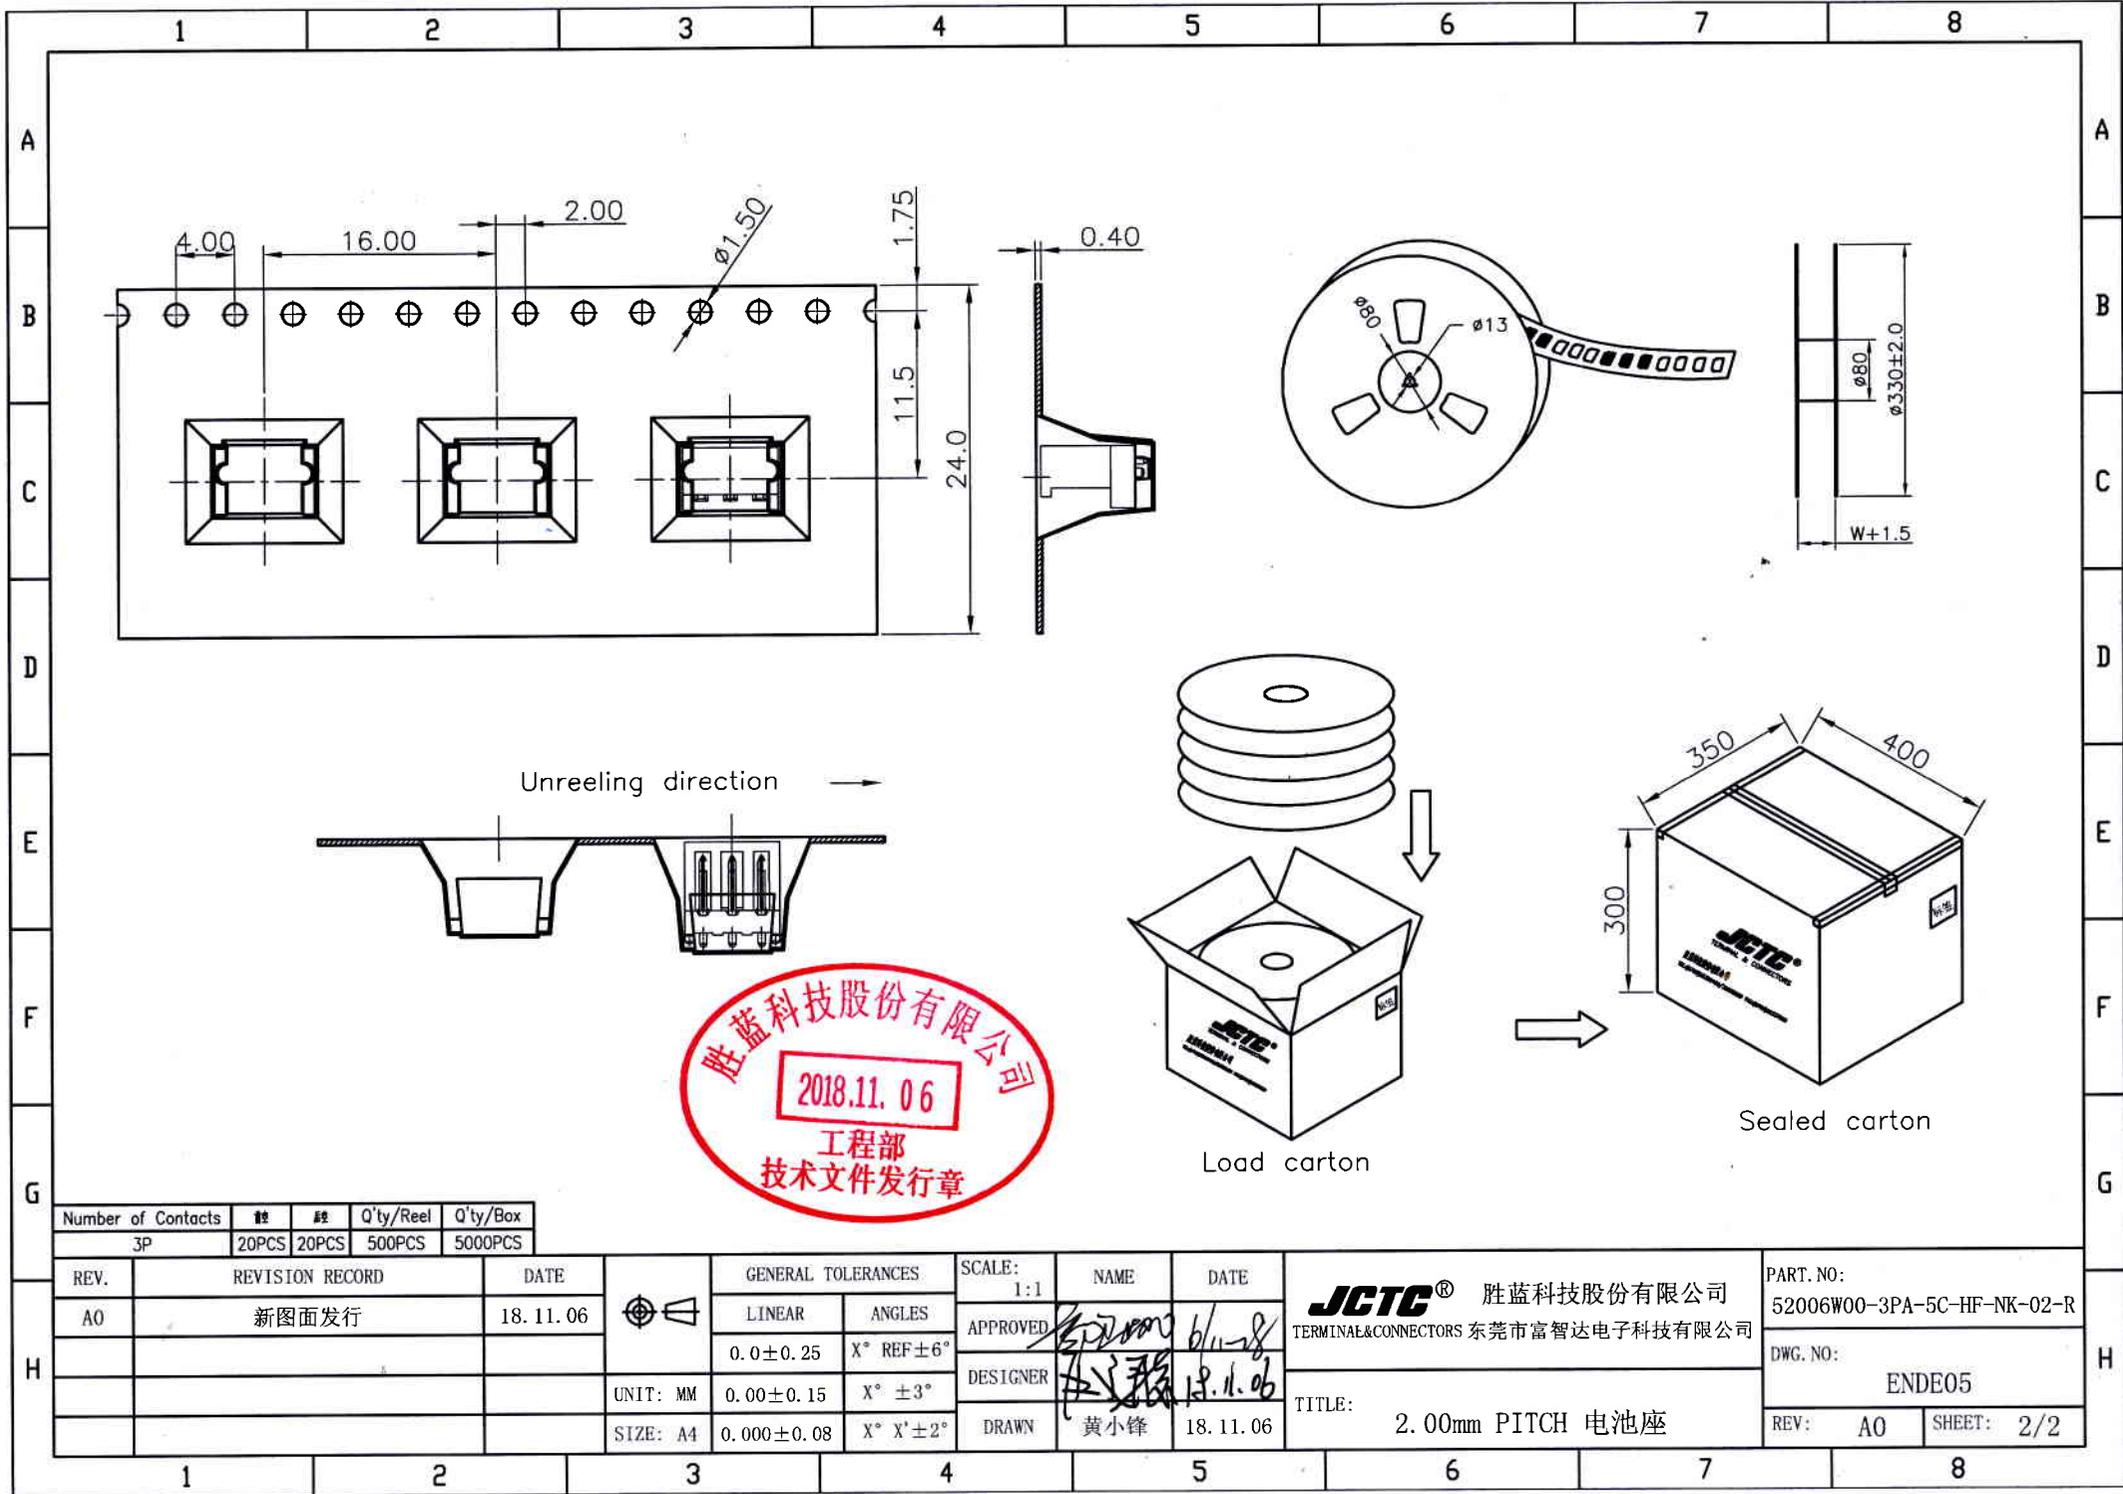

胜蓝科技股份有限公司  
 2018.11.06  
 工程部  
 技术文件发行章

Number of Contacts	卷盘	料盘	Q'ty/Reel	Q'ty/Box
3P	20PCS	20PCS	500PCS	5000PCS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	<b>JCTC</b> ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
A0	新图面发行	18.11.06		LINEAR	ANGLES	1:1	APPROVED			
			0.0±0.25	X° REF±6°		DESIGNER				DWG. NO:
			0.00±0.15	X° ±3°		DRAWN	黄小锋	18.11.06		ENDE05
			UNIT: MM						TITLE:	REV: A0
			SIZE: A4	0.000±0.08	X° X'±2°				2.00mm PITCH 电池座	SHEET: 2/2