


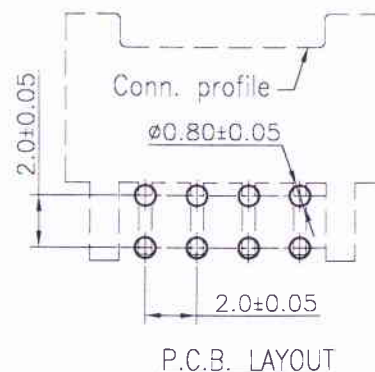
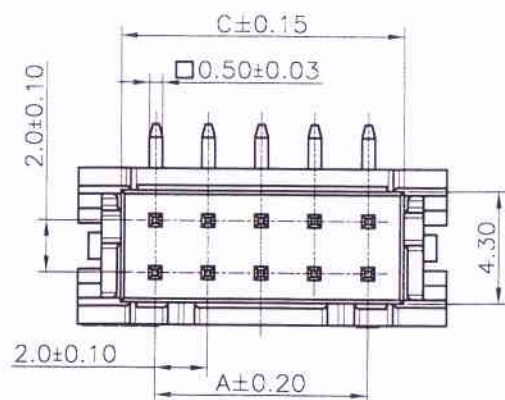
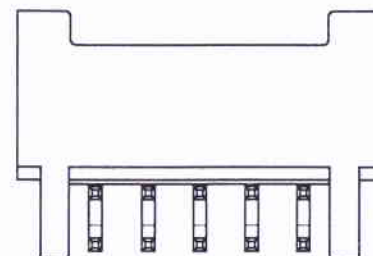


环保物料

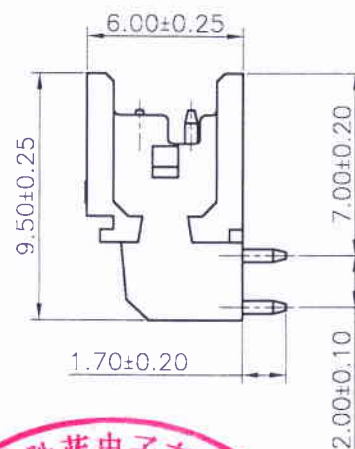

Specifications:

- Rated Voltage : 250V AC/DC
- Rated Current : 3A AC,DC
- Withstand Voltage : 1000V AC/minute
- Contact Resistance : 10mΩ(Max.)
- Insulation Resistance : 800MΩ(Min.)
- Temperature Range : -25°C~+85°C
- Contact: Brass/Matte Tin-plated
- Material: High temperature plastic,UL94V-0
- Halogen Free
- Color: Natural(Beige)

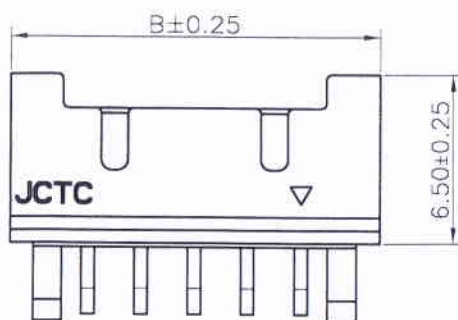

12002W90-2XNP-L-S3-HF
① ② ③ ④ ⑤ ⑥

① Series No.
② W00 : Up Contact
③ No. of Circuits
④ L: Lock TYPE
⑤ S3: S3 TYPE
⑥ HF: Halogen Free

Circuits	Dimensions		
	A	B	C
2x2P	--	8.00	4.70
2x3P	4.00	10.00	6.70
2x4P	6.00	12.00	8.70
2x5P	8.00	14.00	10.70
2x6P	10.00	16.00	12.70
2x7P	12.00	18.00	14.70
2x8P	14.00	20.00	16.70
2x9P	16.00	22.00	18.70
2x10P	18.00	24.00	20.70
2x11P	20.00	26.00	22.70
2x12P	22.00	28.00	24.70
2x13P	24.00	30.00	26.70
2x14P	26.00	32.00	28.70
2x15P	28.00	34.00	30.70
2x16P	30.00	36.00	32.70
2x17P	32.00	38.00	34.70
2x18P	34.00	40.00	36.70
2x19P	36.00	42.00	38.70
2x20P	38.00	44.00	40.70
2x21P	40.00	46.00	42.70
2x22P	42.00	48.00	44.70

东莞市胜蓝电子有限公司
2016.03.24
工程部
技术文件发行章

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	JCTC ® ☐ 苏州伟豪 ☐ 东莞胜景 TERMINAL&CONNECTORS ☒ 东莞胜蓝	PART NO:
A0	新图面发行	16.03.24		LINEAR	ANGLES	APPROVED	陈永友	3/20/16		12002W90-2xNP-L-S3-HF
				C.C ± 0.25	X° REF ± 6°	DESIGNER	伍文聪	16-03-24		DWG. NO:
				UNIT: MM	0.00 ± 0.15	X° ± 3°				ENDE05
			SIZE: A4	C.000 ± 0.08	X° X' ± 2°	DRAWN	伍文聪	16.03.24	TITLE: 2.00mm PITCH DUAL ROW DIP TYPE 90° WAFER -- LOCK TYPE	REV: A0 SHEET: 1/1