


- REMARK/注释:
- CHARACTERISTICS/特性:
 - RATED VOLTAGE: 250V
额定电压: 250伏特
 - RATED CURRENT: 3AMP
额定电流: 3安培
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX.
接触阻抗: 30毫欧最大。
 - INSULATION RESISTANCE: 1000Mohms MIN. at 500V DC
绝缘阻抗: 1000兆欧 最小, 在500伏直流电下
 - DIELECTRIC STRENGTH: 500VRMS
耐电压: 500伏特
 - OPERATING TEMPERATURE RANGE: -55°C~85°C
工作温度: -55°C~85°C

7	CLINCH NUT	2	METAL	NICKL PLATED
6	FEMALE SCREW LOCK	2	铜C3604	NICKL PLATED
5	HOUSING	1	PBT+30% G. F(UL94V-0)	MOLDED COLOR BLACK
4	SPACER	1	PBT+30% G. F(UL94V-0)	MOLDED COLOR BLACK
3	SHELL	1	STEEL	Nickel
2	CONTACT	9	铜C2680	G/F GOLD PLATED ON CONTACT AREA, 100u"MIN. TIN, SOLDER AREA, 30u"MIN. NICKEL UNDERPLATED OVERALL.
1	BOARD LOCK	2	STEEL	Bright Sn

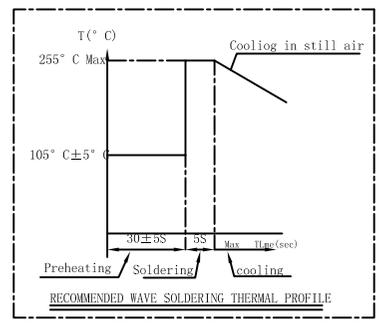

DSB11-09 B D X 3 6 X X X-X

PIN Poles: —
 09:09PIN
 B:FEMALE
 D:DIP 90°
 Insulator Material:
 P:PBT L:LCP 9:PA9T
 SHELL Material:
 3: STEEL
 HEIGHT:
 6:6.15mm
 Contact Area plating on contacts:
 1: G/F 2:Au 3u" 3:Au 5u"
 4:Au 10u" 5:Au 15u"

H:HF R:RoHS
 Packing:
 B: Tray
 P:Bag
 L:Tape reel
 Color:
 K: WHITE
 A:BLACK

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE:	NAME	DATE
A0	NEW REV	17.01.10		LINEAR	ANGLES	1:1	GZT	17.01.10
			0.00±0.15	X° REF±6°		DESIGNER	SMARK	17.01.10
			0.000±0.08	X° X'±2°		DRAWN	KING	17.01.10

TERMINAL&CONNECTORS 胜蓝科技股份有限公司		PART. NO:
东莞市富智达电子科技有限公司		DSB11-09BDX36XXX-X
TITLE:		DWG. NO:
DR 9F锁螺丝		ENDE05
		REV: A0 SHEET: 1/1

JGTC® 胜蓝科技股份有限公司
 胜蓝科技
 东莞市富智达电子科技有限公司

REV: A0	SHEET: 1/1
---------	------------