



NOTE:

1. Material:
 - Housing: LCP Black;Thermoplastics,UL94V-0(Halogen free,)
 - Contact: Copper Alloy T=0.25mm
 - Shell: Copper Alloy T=0.30mm
2. FINISH:
 - Contact: G/F Plated on Contact Area,
 - 80u" Min. Matte Tin Plated on Solder Tails Area,
 - 50u" Min.Nickel Underplating Over All.
 - Shell: 50u" Min.Nickel Underplating Over All.
3. Specification:
 - 3.1: Rated current: 1.5 A
 - Insulation Resistance: 1000MΩ Min. at 500V/DC for 1Minute.
 - Withstanding voltage: 500 VAC/minute
 - Contact Resistance: 30mΩ Max.
 - 3.2: MECHANICAL
 - Mating force: 35N(3.57kgf) Max.
 - Unmating force(Without lock):10N(1.02kgf)
4. Ordering information
 - UAB11-04 B H X 1 3 X X X-X



3.34

±0.03

3:10 3mm
Contact Area plating
on contacts:
1: G/F 2:Au 3u" 3:Au 5u"
4:Au 10u" 5:Au 15u"

A:BLACK

Pin Assignment

GENERAL







- 0.0±0.30
- 0.00±0.20
- 0.000±0.10



GENERAL TOLERANCES:±0.05
(PCB T=0.60 Max.)

The product using material and processing must conform to the
"WI-PZ-142"HSF technical standard control requirements

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO:	
A0	NEW REV	19.05.10	<div style="display: flex; justify-content: space-between;"> <div> <p>LINEAR</p> <p>0.0±0.25</p> <p>VIT: MM 0.00±0.15</p> <p>SIZE: A1 1.000±0.08</p> </div> <div> <p>ANGLES</p> <p>X° REF±6</p> <p>X° ±0°</p> <p>X° X'±2</p> </div> </div>	1:1	<p>APPROVED: [Signature]</p> <p>DESIGNER: [Signature]</p> <p>DRAWN: [Signature]</p>	<p>19.07.15</p> <p>19.07.15</p>	<p>JCTC 胜蓝科技股份有限公司</p> <p>TERMINAL&CONNECTORS 东莞高智达电子科技有限公司</p> <p>TITLE: USB 4P 90° FEMALE</p>	<p>UAB11-04BHX13XXX-X</p> <p>DWG. NO: ENDE05</p> <p>REV: A0 SHEET: 1/2</p>

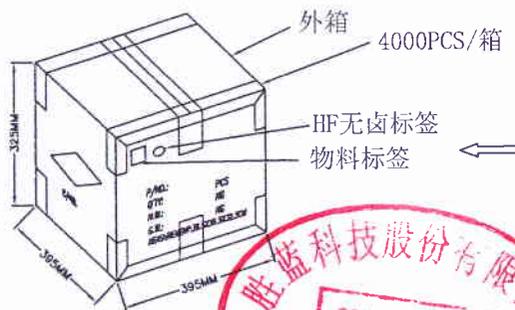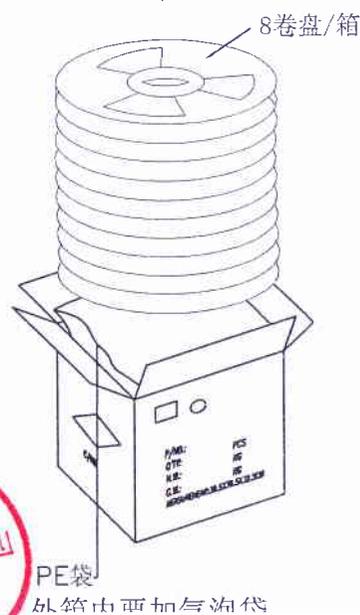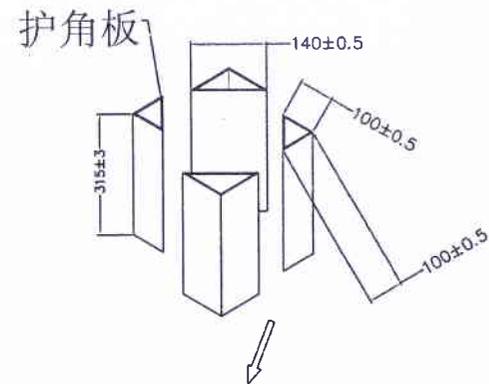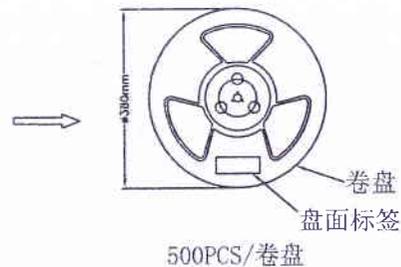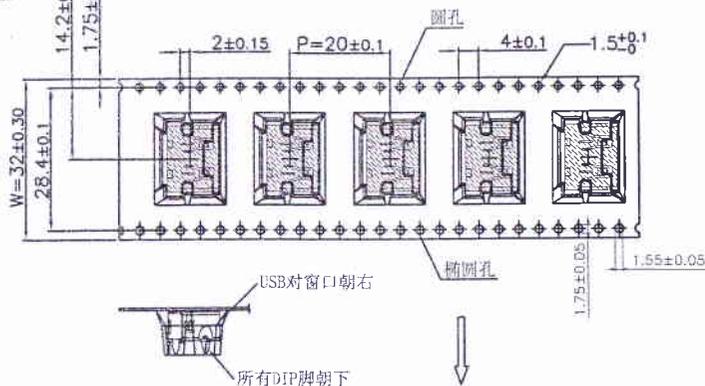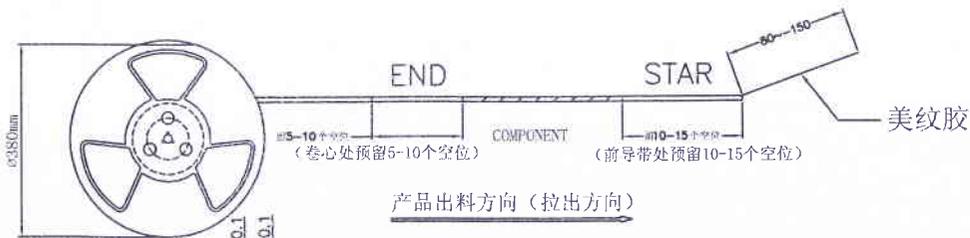

备注:

- 包材规格:
卷盘: $\varnothing 380 * W 32$ mm
卷带: $W=32, P=20$ mm, $T=0.5$ mm 透明PS
三角纸板: $100 * 140 * 100$ mm, $H=315$ mm, $K=K$
热封上带: $W=25.5, T=0.08$ mm
PE袋: $T0.007 * W 65 * H 65$ CM
外箱: $395 * 395 * 325$ mm $K=K$
- 将产品依左图所示装入载带中, 卷盘的卷心处预留5-10个空格, 后面前导带处预留10-15个空格, 再将热封上带与载带热熔好, 绕完后用80-150mm长度的美纹胶粘在载带上, 500PCS/卷盘, 每卷盘都需贴盘面标签。
- 将8个卷盘放入1个大PE防水袋, 再将4个护角板装入外箱, 而后将包好PE防水带的产品放入外箱, 外箱内如有间隙, 可适当加入气泡袋或珍珠棉等软物填充间隙, 防止产品晃动, 共计4000PCS/外箱。
- 将装好产品外箱用透明胶带封成“工”形, 并在外箱左上角约如图位置贴HF无卤标签,



REV.	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART. NO.
A0	19.05.10	LINEAR ANGLES	1:1			UAB11-04BHX13XXX-X
		0.0±0.25 X° REF ±6°	APPROVED			DWG. NO:
		0.00±0.15 X° ±3°	DESIGNER			

TITLE: USB 4P 90° FEMALE