

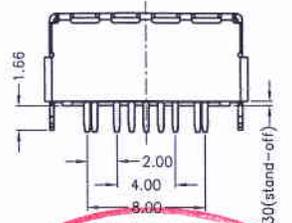
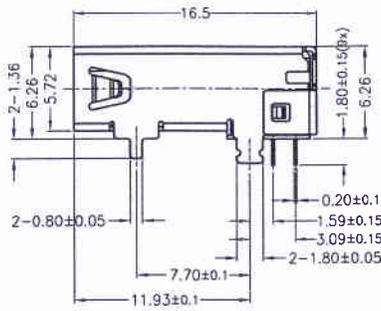


RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES: ±0.05 (t=1.2)


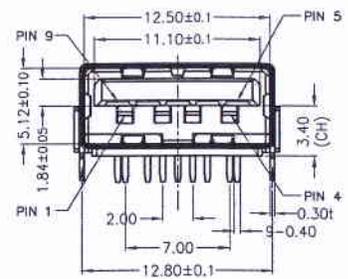


Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

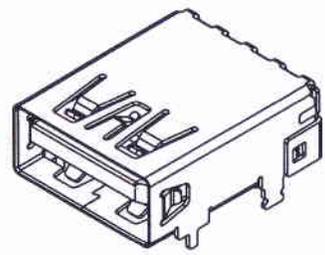

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

- NOTES:
- MATERIAL AND PLATING:**
Housing: PA9T+30%G.F,Black
Contact(4Pin): Phosphor Bronze,Au And Sn Plated.
Contact(5Pin): Brass,Au And Sn Plated.
Shell: Stainless Steel,Ni Plated All Over
 - MECHANICAL CHARACTERISTIC**
Mating Force: 35N(3.57Kgf) Max.
Unmating Force: 10N(1.02Kgf) Min.
Durability: 5,000 Cycles.
 - ELECTRICAL CHARACTERISTIC**
Current Rating: 1.8A(Pin1,4),
0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 100V AC.
 - TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
 - DATECODE INFORMATION:**
YYMMDD (Y:YEAR M:MONTH D:DATE)
 - ORDER INFORMATION:**

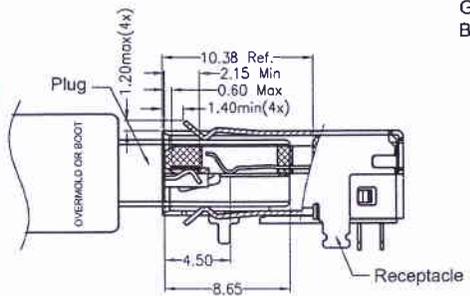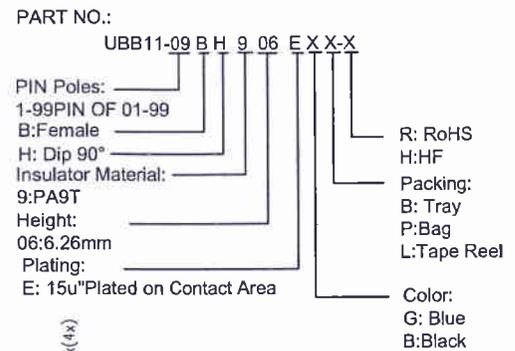

Mated Condition


REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO.:
AO	NEW REV	19.07.31	LINEAR 0.0±0.25	1:1	[Signature]		UBB11-09BH906EXX-X
			ANGLES X° REF±6°	APPROVED	[Signature]		DWG. NO.:
			UNIT: MM 0.00±0.15	DESIGNER	[Signature]		ENDE05
			SIZE: A4 0.000±0.08	DRAWN	[Signature]		REV: AO SHEET: 1/2
							TITLE: USB3.0 AF R/A DIP TYPE CH=3.4

PACKAGING INSTRUCTION I:



1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.

PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
UBB11-09BH906EXX-X	3500 (PCS)	350 (PCS)	10

1. QUANTITY: 350 PCS
2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

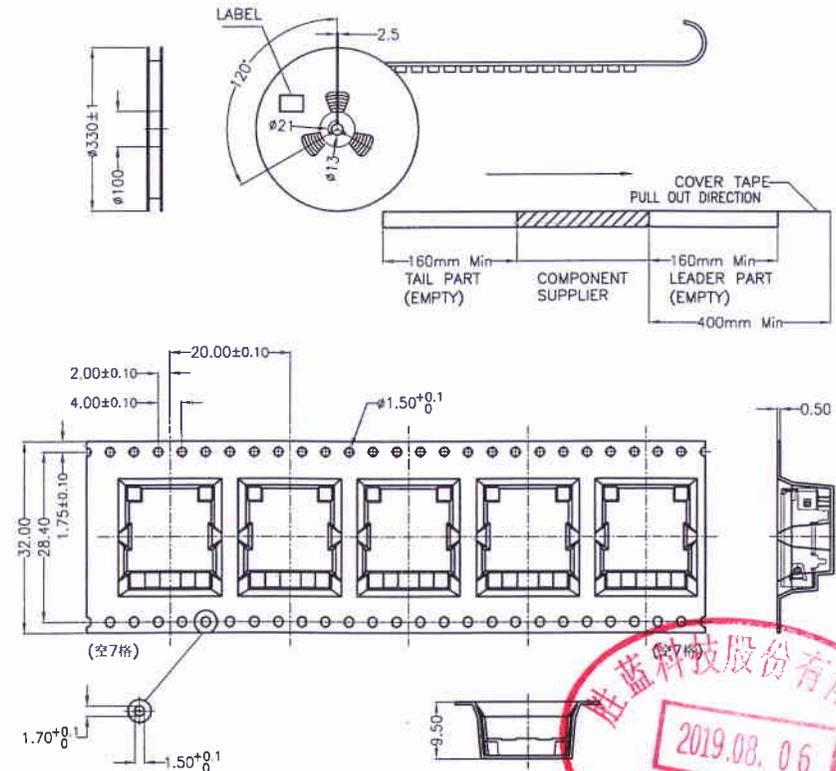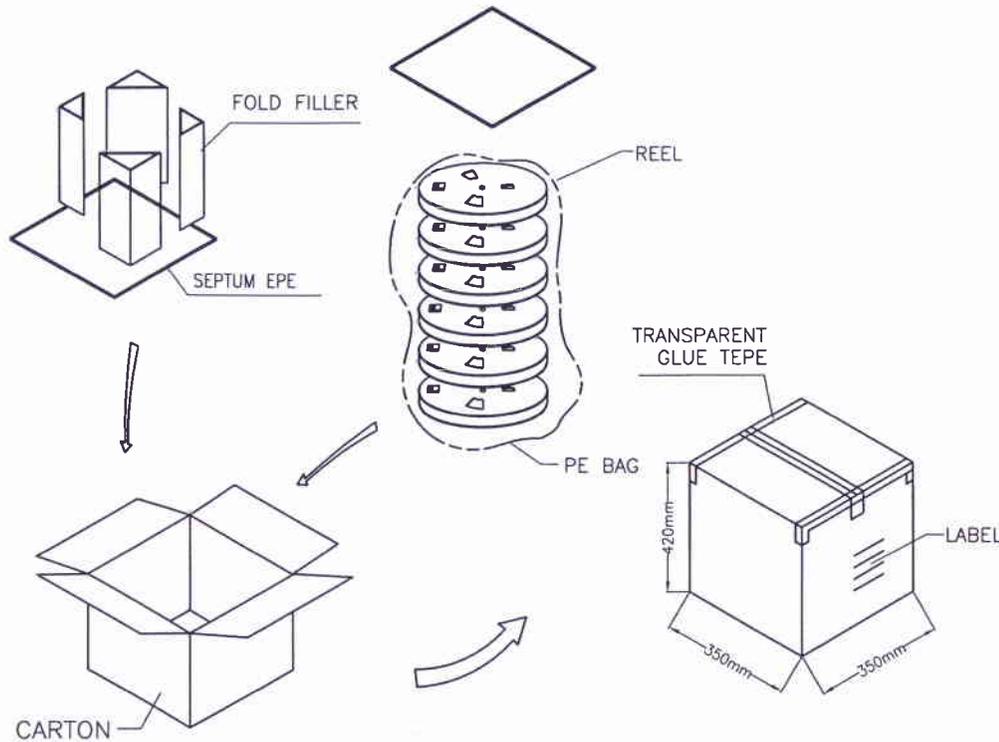

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: UBB11-09BH906EXX-X
A0	NEW REV	19.07.31		SIZE: A4	L. LINEAR 0.0±0.25	ANGLES X° REF±6°			
				0.00±0.15	X° ±3°	DESIGNER	TITLE: USB3.0 AF R/A DIP TYPE CH=3.4	REV: A0	SHEET: 2/2
				0.000±0.08	X° X'±2°				

JCTC 胜蓝科技股份有限公司
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司