

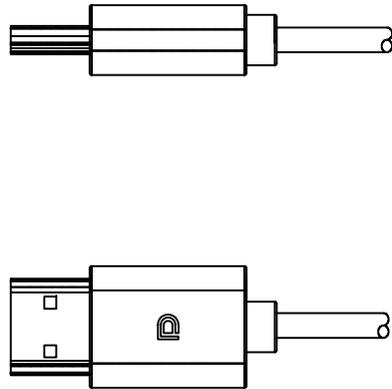


RoHS Compliant

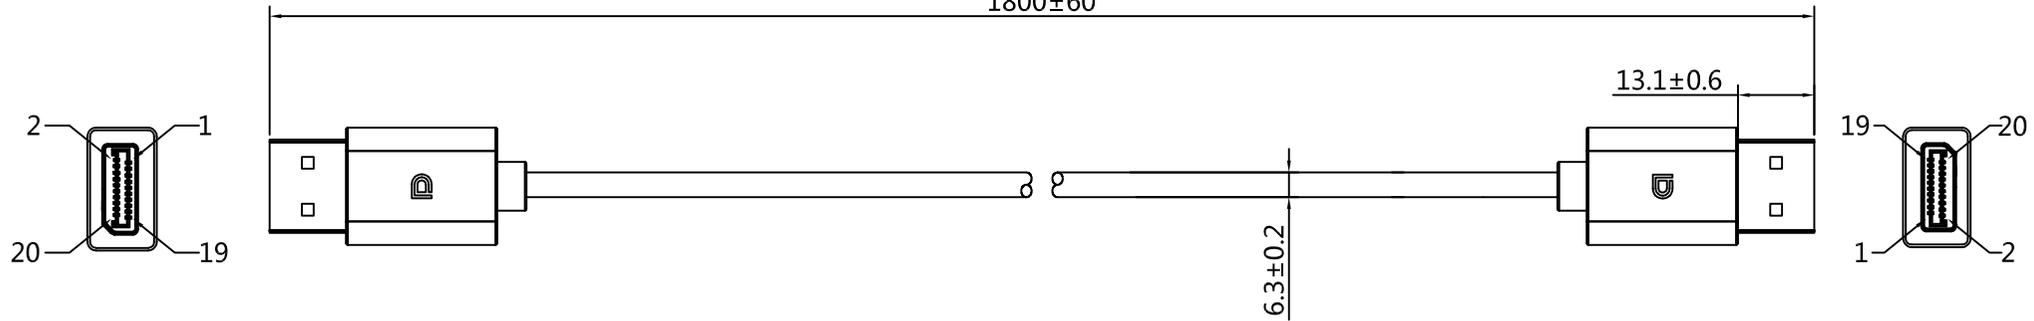

CIRCUIT DIAGRAM		
P1	WIRE COLOR	P2
1	WHITE	12
3	BROWN	10
2	GND	11
4	YELLOW	9
6	WHITE	7
5	GND	8
7	WHITE	6
9	BLUE	4
8	GND	5
10	RED	3
12	WHITE	1
11	GND	2
15	WHITE	15
17	GREEN	17
16	GND	16
13	BLACK	13
14	BROWN	14
18	YELLOW	18
19	ORANGE	19
CASE	BRAID SHIELD	CASE

P20pin Without welding wire

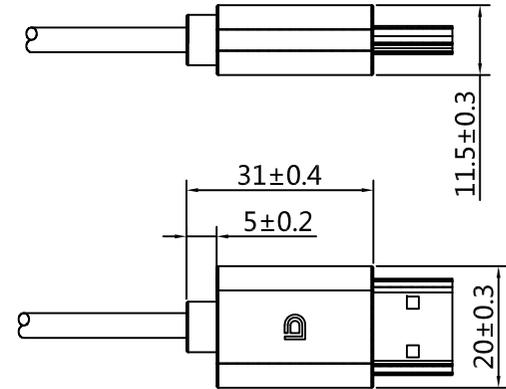


ELECTRICAL TEST:

1. OPEN/SHORT/INTERMITTENCE:100%
2. HI-POT:300V DC/SEC
3. INSULATION RESISTANCE:10MΩ Min, DC 300V/0.01S
4. CONDUCTION TEST: 2Ω MAX.
- 5.Characteristic impedance:100±10 ohm


						一般公差 GENERAL TOLERANCE		绘图 DR.		wyj		料号 PART NO. JCT130-F001			
						X.X ±0.5	X' ±10'	校对 CHK.							wyj
						X.XX ±0.3	X.X' ±5'	审核 CHK.		品名 TITLE		比例 SCALE 1:1			
						X.XXX ±0.2	▲ MAJOR DIM.	核准 APPD.							Josha
△ X	X0	20.06.29	NEW EDITION	wyj	Josha	单位 UNIT	mm		核准 APPD.		Josha		版次 REV. X0		
MARK	REV.	DATE	DESCRIPTION	CHK.	APPD.					DP20PIN/M TO DP20PIN/M CABLE L:1800mm					

JCTC® Shenglan Technology Co LTD
TERMINAL & CONNECTORS


RoHS Compliant

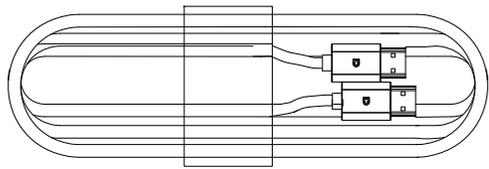


1. Tie the wire with silica gel;




2. Each bag is packed with 3PCS, and the bag mouth is sealed with transparent glue,

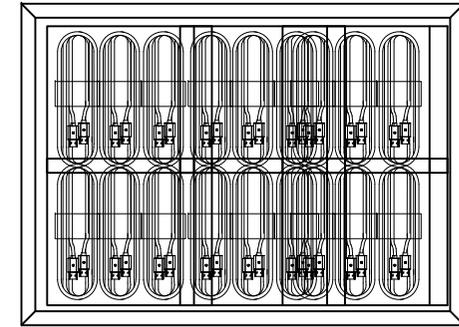

3. bags per layer 12 * 3 = 36PCS / layer It should be neatly arranged without messy extrusion;

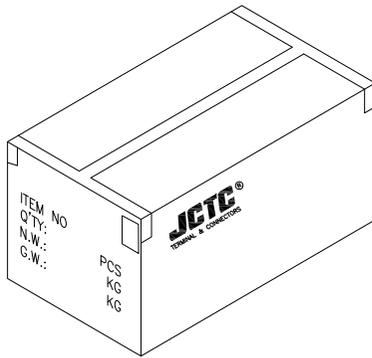

5. Put 2 packs of desiccant in each box, seal the box with transparent tape, seal the box with yellow tape, and fill with foam and other fillers;
6. In-factory labels need to be attached to the sides of the carton;

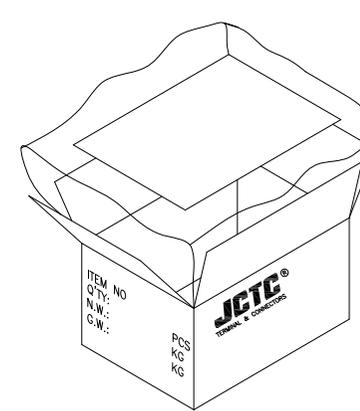

4. As shown in the figure, place the waterproof bag in the outer box and put 1PCS separator on each layer, and 3 boxes in a box * 36PCS = 108PCS / box (RER); Carton specifications: 380mm (L) * 320mm (W) * 280mm (H) Material K = K

			一般公差 GENERAL TOLERANCE		绘图 DR.	wyj	 Shenglan Technology Co LTD <small>TERMINAL & CONNECTORS</small>	料号 PART NO.		
			X.X ±0.5	X' ±10'	校对 CHK.	wyj		JCT130-F001		
			X.XX ±0.3	X.X' ±5'	审核 CHK.	Josha		文件编号 NUMBER		
			X.XXX ±0.2	▲ MAJOR DIM.	核准 APPD.	Josha	ENDCA08			
△ X	X0	20.06.24	NEW EDITION		单位 UNIT	品名 TITLE		比例 SCALE	SHEET	版次 REV.
MARK	REV.	DATE	DESCRIPTION		mm	DP20PIN/M TO DP20PIN/M CABLE L:1800mm		1:1	1/1	X0
					