
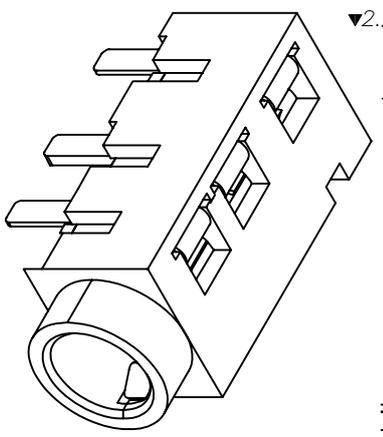
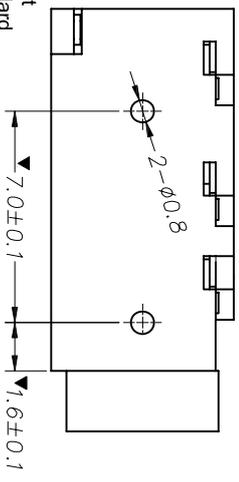
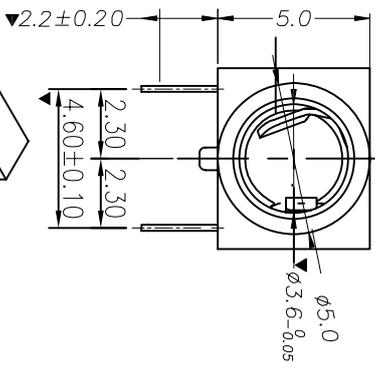
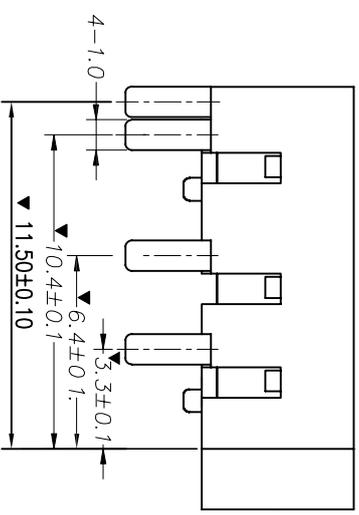


P.C.B LAYOUT TOP VIEW



- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS:**
 - 1-1. RATING: 12V 1A
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 100M Ω MIN. MEASURED BY 500V DC
 - MECHANICAL CHARACTERISTICS:**
 - 2-1. INSERTION FORCE : 0.3~3.0 KGF
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
 3. LIFE TEST: 5,000 CYCLES MIN.
 4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

JAB11-04 B H X P 5 X A X R

- PIN Poles:**
- 04:04PIN
 - B:FEMALE
 - H:DIP 90°
- Insulator Material:**
- A:PPA 4:PA46
- Plug OD:**
- P:φ3.5mm
- Height:**
- 5:5.00mm
- Plating:**
- K: TIN Plated
 - 9: Ag Plated
- Packaging:**
- B: Tray
 - P: Bag
 - G: Tube
 - L: Tape reel
 - A: BLACK
- RoHS**

The product using material and processing must conform to the "W/P-Z-142"HSF technical standard control requirements

| REV. | REVISION RECORD | DATE | GENERAL TOLERANCES | | SCALE: | NAME | DATE | TITLE: | |
|------|-----------------|----------|--------------------|-----------|----------|-------|----------|-------------------------------------|--|
| A0 | NEW REV | 17.01.10 | LINEAR | ANGLES | 1:1 | GZT | 17.01.10 | JSTC® 胜蓝科技股份有限公司 | |
| | | | 0.0±0.25 | X° REF±6° | APPROVED | GZT | 17.01.10 | TERMINAL&CONNECTIONS 东莞市富智达电子科技有限公司 | |
| | | | UNIT: MM | X° ±3° | DESIGNER | SMARK | 17.01.10 | | |
| | | | SIZE: A4 | X° X'±2° | DRAWN | KING | 17.01.10 | | |
| | | | | | | | | ∅3.5mm PHONE JACK | |
| | | | | | | | | PART. NO: JAB11-04BHX P5XAX-R | |
| | | | | | | | | DWG. NO: ENDE05 | |
| | | | | | | | | REV: A0 SHEET: 1/1 | |