
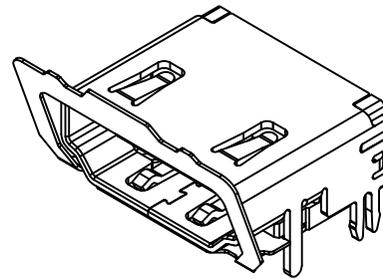
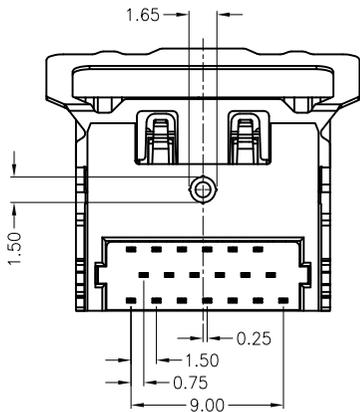
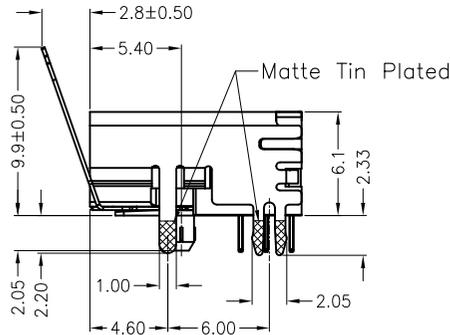


RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES:±0.03 (t=1.6)

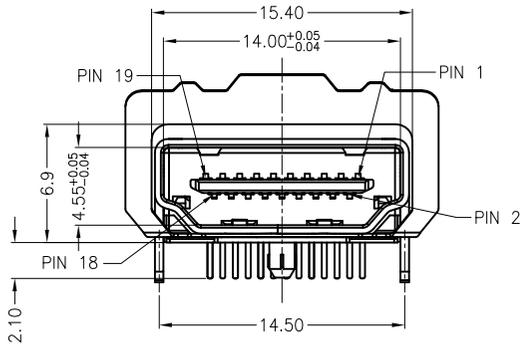

NOTES:

- MATERIAL AND PLATING:
Housing: LCP+30%G.F,UL94V-0,Black
Contact: C2680, Au And Sn Plated.
Shell: C2680,Matte-Sn Plated on Solder Tails.
Nickel UnderPlated.
Spring: Stainless Steel.
- MECHANICAL CHARACTERISTIC
Mating Force: 44.1N(4.5Kgf) max.
Unmating Force: 9.8N~39.2(1~4Kg).
Durability: 10,000 Cycles.
- ELECTRICAL CHARACTERISTIC
Current Rating: 0.5A Max.
Voltage Rating: 40V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min(unmated)
10M Ohm Min(mated)
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE
Openrating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- ORDER INFORMATION:

HD9A-019x-LB06-R
a b cd e

- a:TOTAL PIN
019=19pin
b:PLATING TYPE
0=GOLD G/F
1=GOLD 3u"
3=GOLD 5u"
5=GOLD 15u"
8=GOLD 30u"
c:MATERIAL
L=LCP(ROHS2.0+HF)
d:COLOR
B=BLACK
e:Tape Reel

				一般公差 GENERAL TOLERANCE		绘图 DR.	王正顺	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS		
				X.X ±0.30	X' ±5'	校对		HD9A-019x-LB06-R	ENDPT01			
				X.XX ±0.25	X.X' ±3'	审核		品名 TITLE				
				X.XXX ±0.10	▲ MAJOR DIM.	审核		HD9A-019x-LB06-R				
A0	21.10.08	新图面发行	董东平	杨章雄	单位 UNIT	核准		HDMI AF DIP 3Rows PRODUCT	比例 SCALE	SHEET	版次 REV.	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	mm	APPD.		WITH EMI SPRING(外壳焊脚雾锡)	1:1	1/1	A0	


PACKAGING INSTRUCTION I:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.





PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
HDD-A19F-15T-BN61	2800 (PCS)	280 (PCS)	10

1. QUANTITY: 280 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

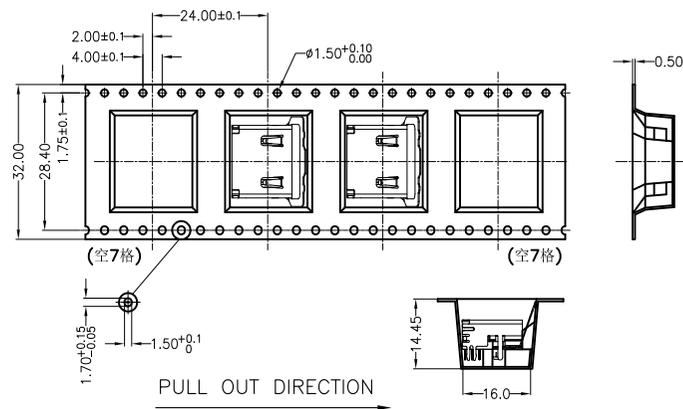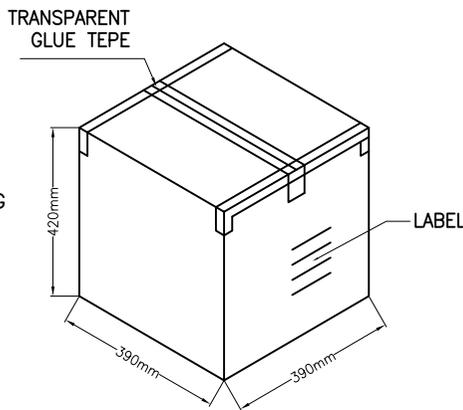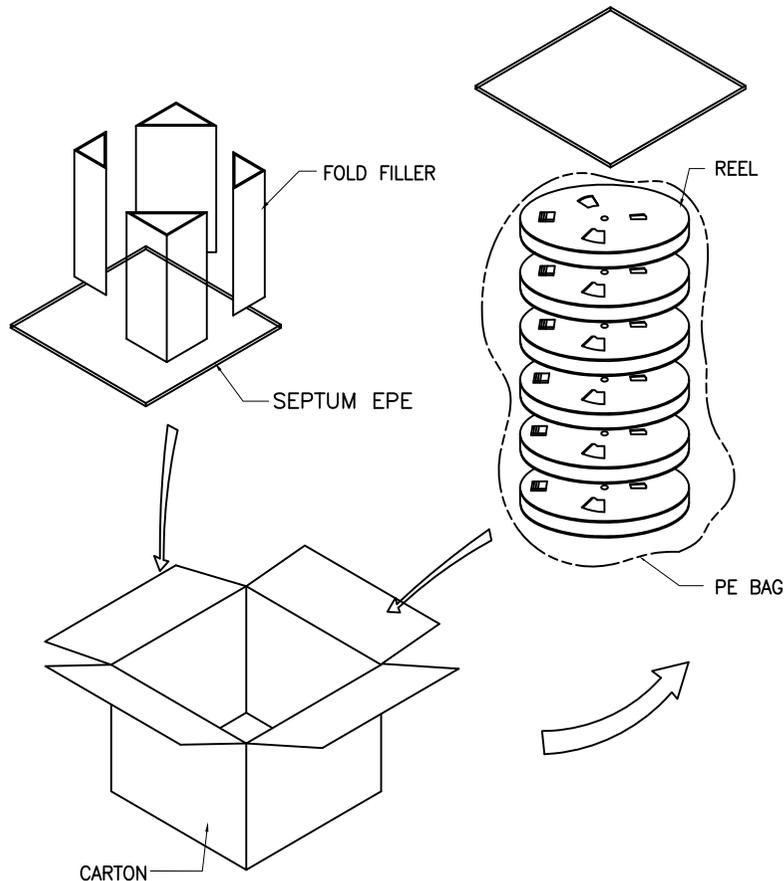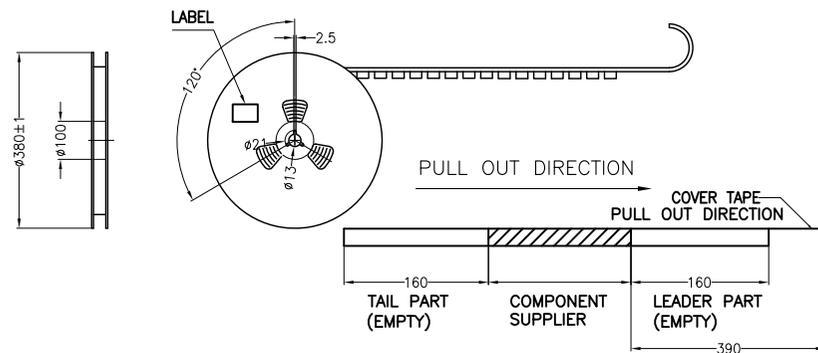

					一般公差 GENERAL TOLERANCE		绘图 DR.	王正顺	料号 PART NO.	文件编号 NUMBER	 TERMINAL & CONNECTORS			
					X.X ±0.30	X' ±5°	校对 CHK.		HD9A-019x-LB06-R	ENDPT01				
					X.XX ±0.25	X.X' ±3°	审核 CHK.		品名 TITLE			比例 SCALE	SHEET	版次 REV.
A0	21.10.08	新图面发行	董东平	杨章雄	X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		HDMI AF DIP 3Rows PRODUCT WITH EMI SPRING(外壳焊脚雾锡)			1:1	1/1	A0
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm								