
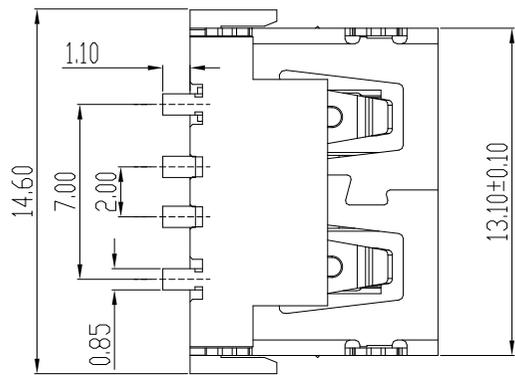
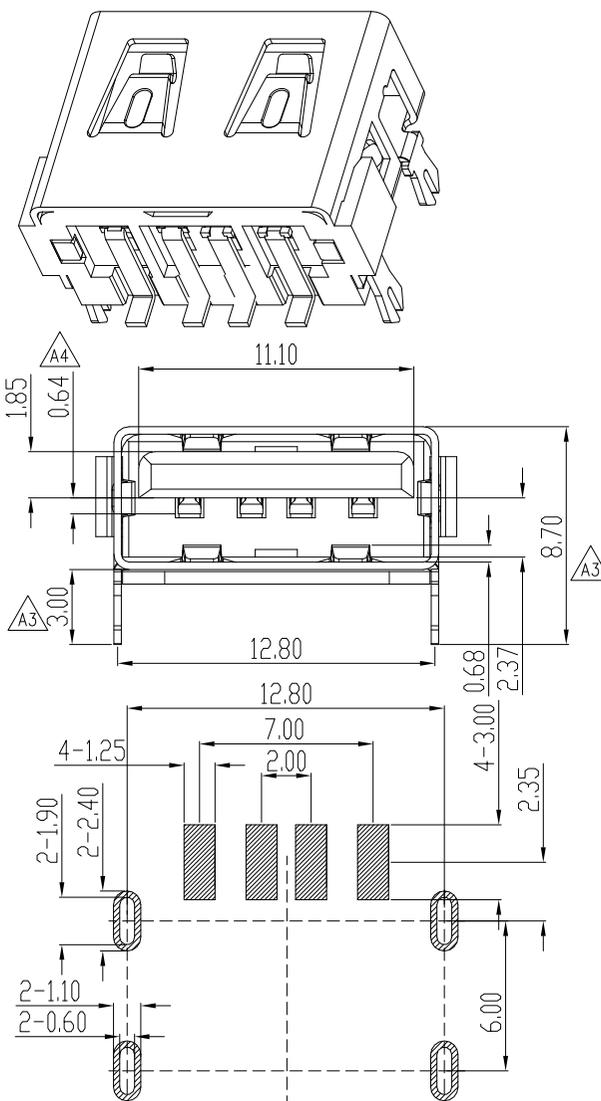


环保物料

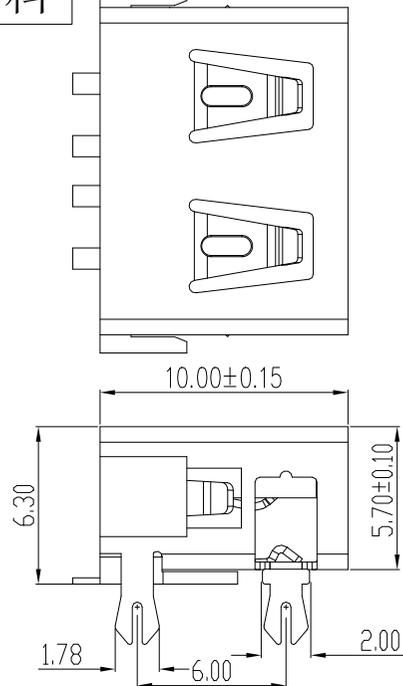

RECOMMENDED P.C.BOARD LAYOUT (TOP VIEW)
TOLERANCES UNLESS OTHERWISE SPEC.±0.05

NOTES:

1. MATERIAL:
Housing: LCP E130i,Black.
Contact: C2680.
Shell: C2680.
2. PLATING:
Contact: 1u" Au plating on contact area
50 u" matte tin on the solder tails.
Shell: 80u" nickel underplating over all;
3. MECHANICAL CHARACTERISTIC
Mating Force: 3.57Kgf max.
Unmating Force: 1.02Kgf min
Terminal Retention: 1.0kgf(MIN)
4. ELECTRICAL CHARACTERISTIC
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000MEGA ohms MIN
Dielectric Withstanding Voltage: 500V AC Min

5. ORDER INFORMATION:

N2A-F A000 S R L A 2-XX 01
1 2 3 4 5 6 7 8 9 10

- 1,N2A=USB 2.0 A TYPE
- 2,F=FEMALE
- 3,A000=普通规格
- 4,S=SMT
- 5,R=90°
- 6,L=LCP
- 7,A=黑色
- 8, 2=鱼叉脚
- 9,A0= 不带翻边吸塑盒包装 AR= 不带翻边载带包装
- 10,CONTACT AREA PLATING ON CONTACTS
01=G/F 03=Au 3u"
05=Au 5u" 10=Au 10u"
15=Au 15u" 30=Au 30u"

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC [®]
				1:1					
A0	新图面发行	21.01.29	LINEAR	APPROVED	N2A-FA000SRLA2-A001			ENDE05	
A2	增加铁壳工艺缺口 $\triangle A_2$	22.10.21	0.0±0.30	DESIGNER	TITLE				
A3	增加尺寸 $\triangle A_3$	23.09.27	0.00±0.25	DRAWN	USB 2.0 ON BOARD TYPE				
A4	修改弹高尺寸 $\triangle A_4$	23.11.10	0.000±0.10				REV A4 SHEET 1/1		

1

2

3

4


5

6

7

8

环保物料

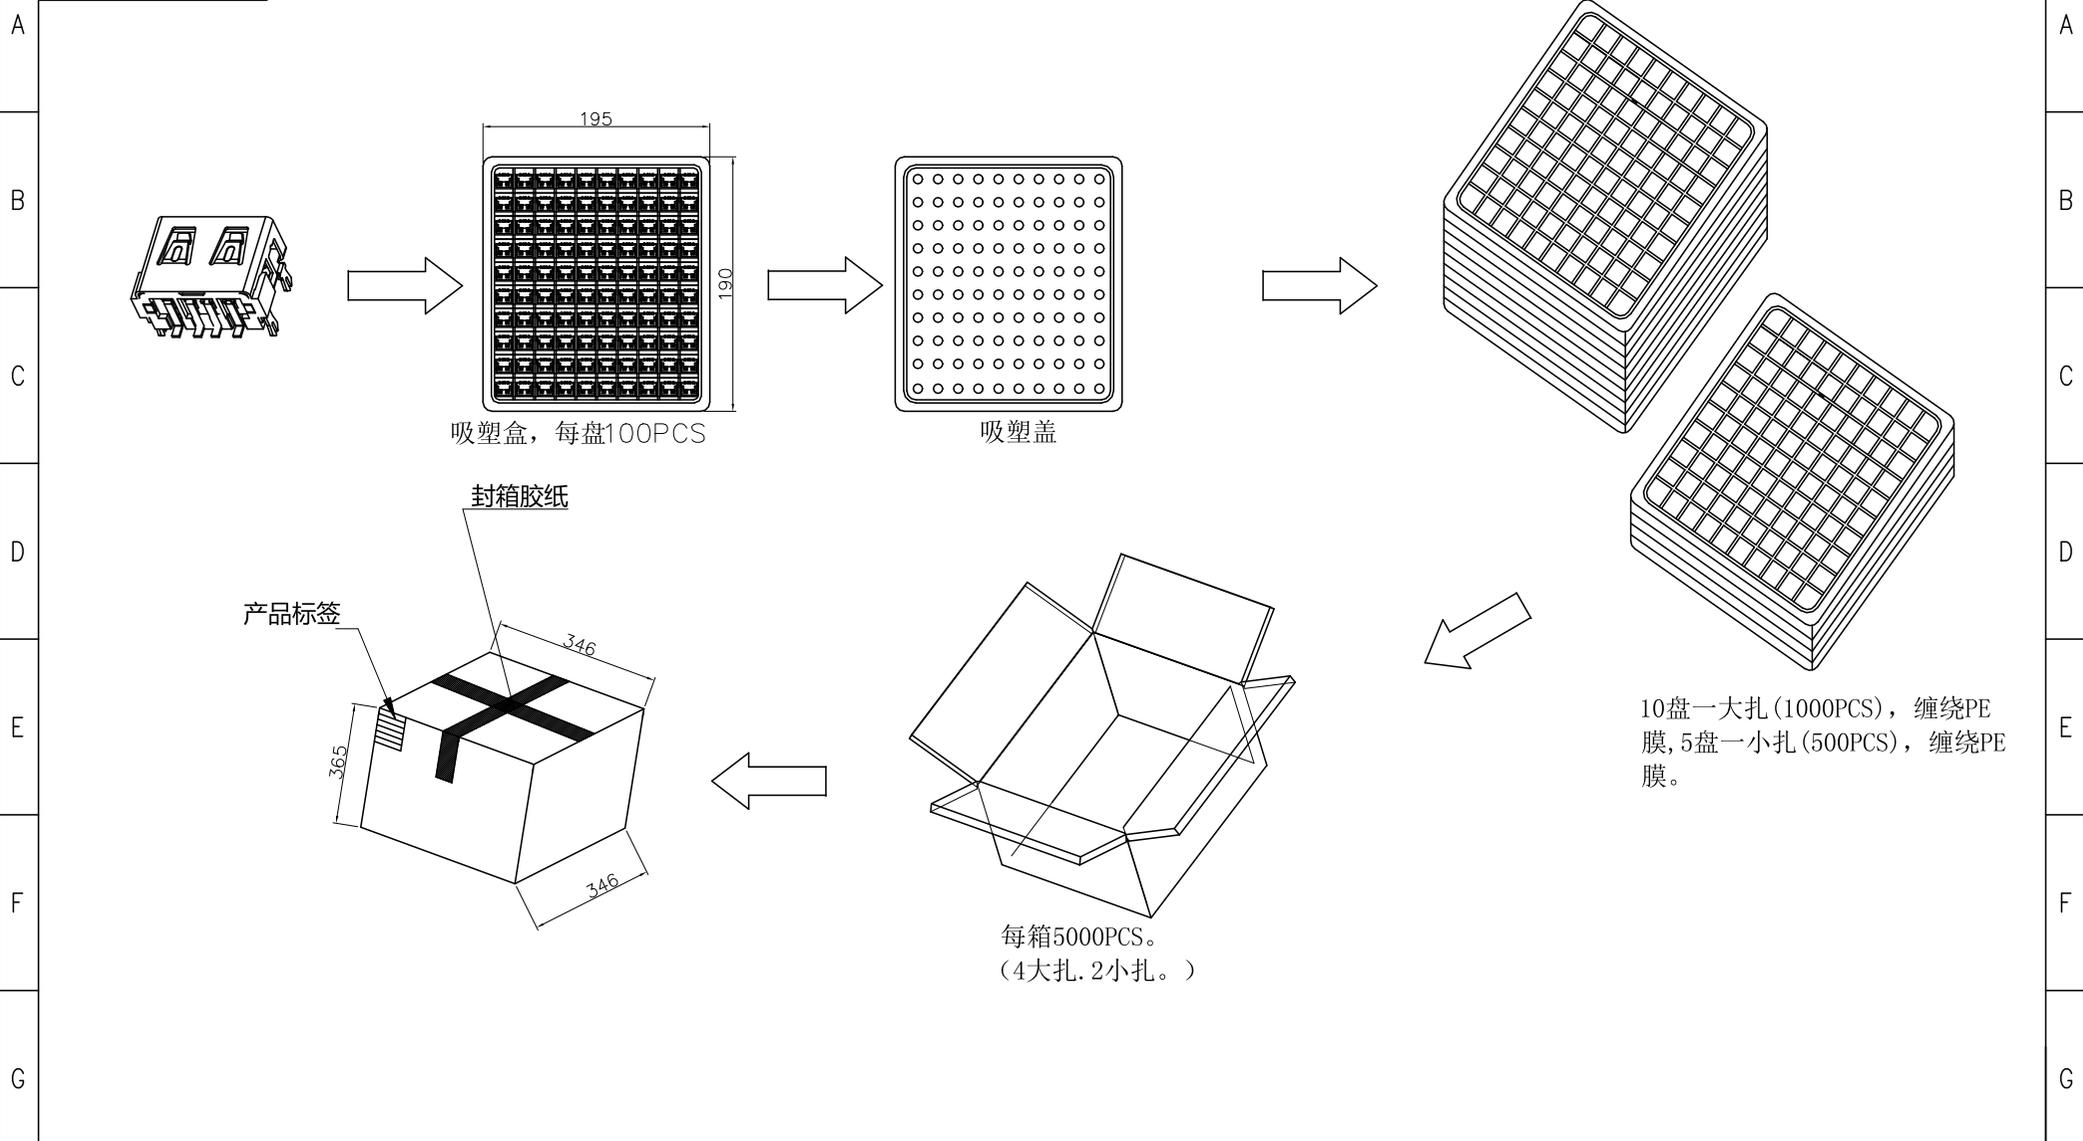

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.01.29		LINEAR	ANGLES	1:1								
A1	换图框发行	22.09.27	0.0±0.30	X° REF±6°	APPROVED			N2A-FA000SRLA2-A001	ENDE05					
A2	包装由载带改为吸塑盒	23.07.27	UNIT: MM	X° ±3°	DESIGNER			TITLE						
			SIZE: A4	X° X' ±2°	DRAWN	Dalan Dai	23.07.27	USB 2.0 ON BOARD TYPE 包规	REV	A2	SHEET	1/1		