
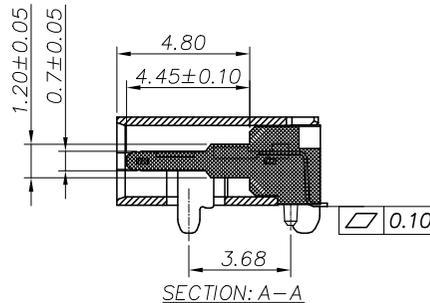
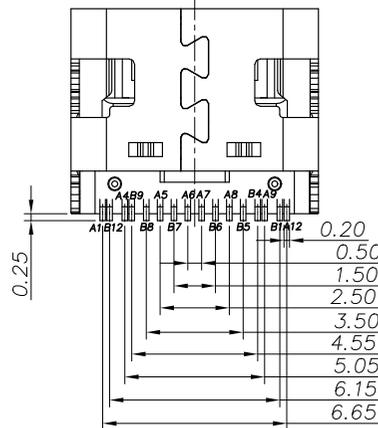
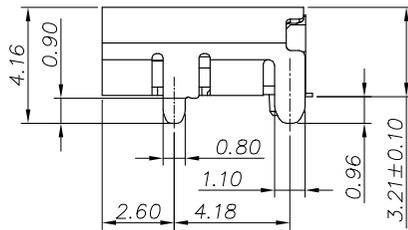
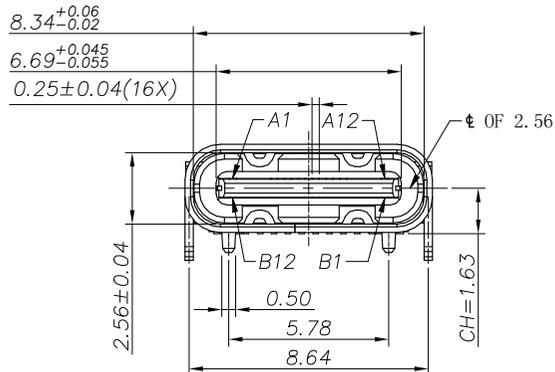



环保物料




NOTE:




1. MATERIAL SPECIFICATION:
 1. HOUSING: LCP, UL94 V-0. Black
 2. TERMINAL: COPPER ALLOY (C1814)
 3. MID PLATE: STAINLESS STEEL (SUS301)
 4. FRONT SHELL: STAINLESS STEEL (SUS304)
2. PLATING SPECIFICATION:
 - 2-1. TERMINAL:
 - Ni 50u" MIN. UNDER PLATED OVER ALL.
 - Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 - (GOLD PLATING THICKNESS FOLLOW THE P/N)
 - PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
 - 2-2. FRONT SHELL:
 - PLATING SPECIFICATIONS FOLLOW THE P/N
 - 2-3. MID PLATE PLATE:
 - CLEAR ONLY
3. MECHANICAL PERFORMANCE,
 - 3-1. INSERTION FORCE: 0.5~2.0kgf.
 - 3-2. REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3. DURABILITY: 10000 CYCLES.
4. ELECTRICAL PERFORMANCE,
 - 4-1. VOLTAGE RATING: 5 V DC/AC (RMS. max)
 - CURRENT RATING: 5 AMPS. FOR TOTAL VBUS/GND PINS;
 - 1.25AMPS FOR CC PIN, 0.25 AMPS. FOR ALL OTHER CONTACT.
 - 4-2. LLCR:
 - VBUS & GND PINS AND OTHER PINS: 40mΩ /PIN MAX.
 - SHIELD: 50mΩ /MAX.
 - LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 4-3. INSULATION RESISTANCE: 100MΩ MIN
 - 4-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25° C~+85° C.
6. IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260° C.

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS	
A2	21.07.07	更新图框发行	董东平	杨章雄	X.X ±0.30	X* ±2°	校对 CHK.		W-USB-CH168-16P		ENDPT01			
A1	19.12.06	更新图面发行	李兴泽	杨章雄	X.XX ±0.20	X.X* ±1°	审核 CHK.		品名 TITLE		比例 SCALE		SHEET	版次 REV.
A0	18.06.05	新图面发行	李兴泽	杨章雄	X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		USB CF 16PIN (L=7.35) WITH POST		1/1		1/2	A2
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm								

环保物料

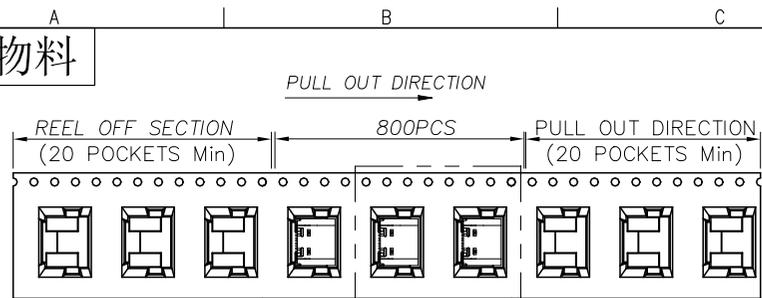

SEE DETAIL X

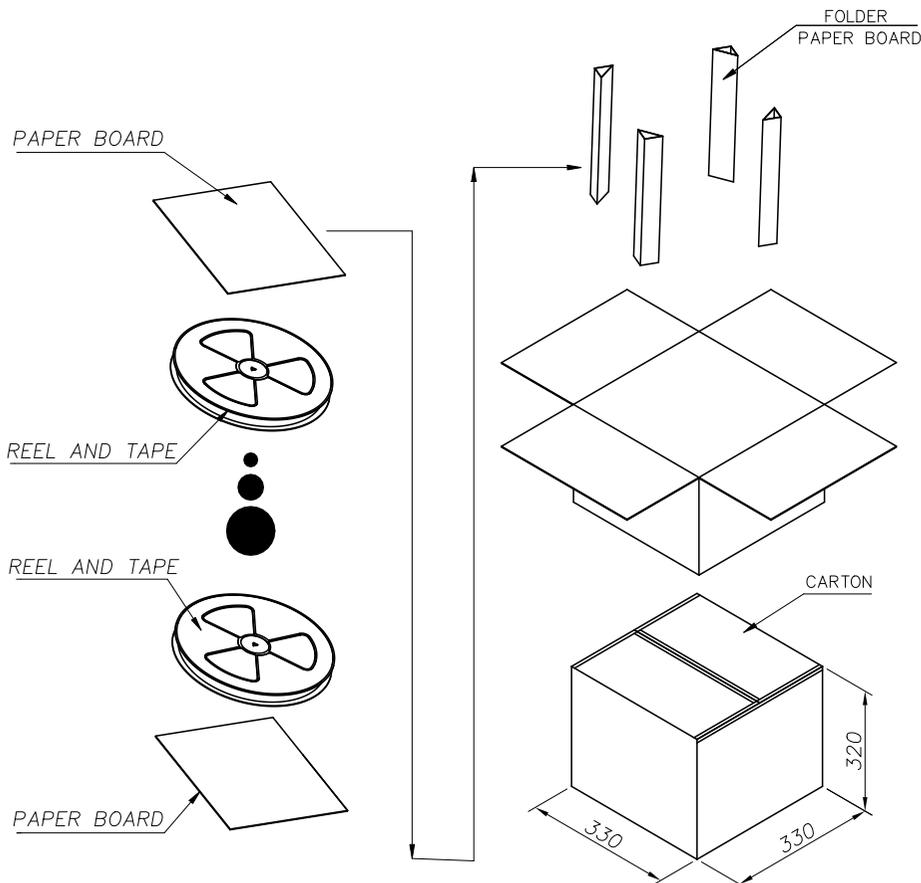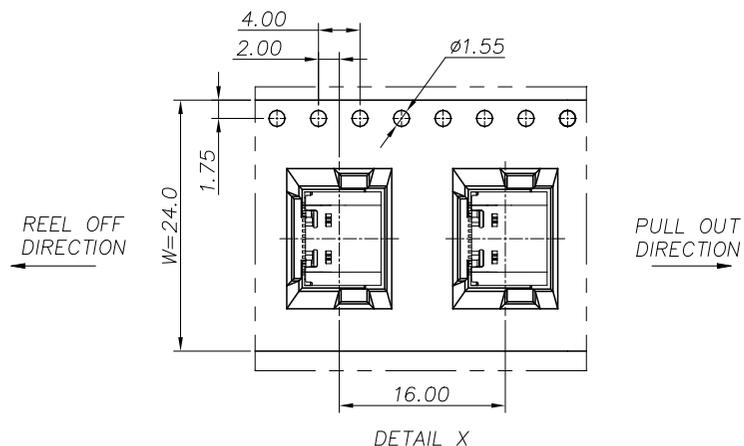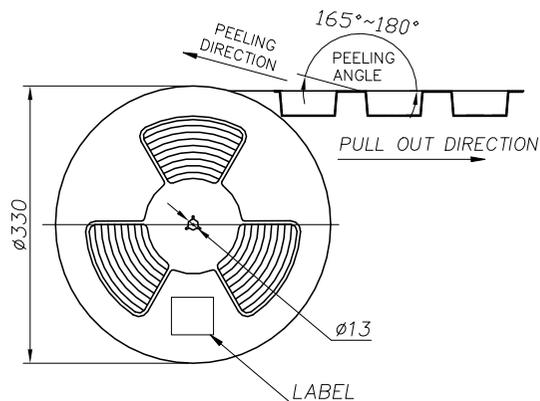

	REEL	CARTON
CONNECTOR (PCS)	800	8000

8	A2	21.07.07	更新图框发行	董东平	杨章雄	一般公差 GENERAL TOLERANCE X.X ±0.30 X* ±2° X.XX ±0.20 X.X* ±1° X.XXX ±0.10 ▲ MAJOR DIM. 单位 UNIT mm	绘图 DR.	料号 PART NO. W-USB-CH168-16P	文件编号 NUMBER ENDPT01	JCTC ® TERMINAL&CONNECTORS		
	A1	19.12.06	更新图面发行	李兴泽	杨章雄		校对 CHK.					
	A0	18.06.05	新图面发行	李兴泽	杨章雄		审核 CHK.					
	版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.		核准 APPD.					
								品名 TITLE USB CF 16PIN (L=7.35) WITH POST		比例 SCALE 1/1	SHEET 1/1	版次 REV. A2