

NOTES:

1.MATERIAL SPECIFICATION

- 1) INSULATION MATERIAL THERMOPLASTIC.
- 2) SHELL:COPPER ALLOY/SPCC,T:0.30mm
PLATING: NICKEL
- 3) TERMINAL:COPPER ALLOY,T:0.25mm
PLATING: GOLD/TIN PLATED.

2.ELECTRICAL CHARACTERISTIC:

- 1)INSULATION RESISTANCE:1000MΩ MIN.
- 2)CONTACT RESISTANCE:30mΩ MAX.
- 3)WITHSTANDING VOLTAGE:500V AC.

3.MECHANICAL CHARACTERISTICS:

- 1)INSERTION FORCE:3.57Kgf MAX.
- 2)EXTRACTION FORCE:1.02Kgf MIN.

| | | | | |
|------|------------|-----------|------------|---------------|
| 4 | CONTACT | 4 | BRASS | GOLD FLASH |
| 3 | HOUSING | 1 | PBT | BK/WH |
| 2 | BACK SHELL | 1 | SPCC | NICKE PLATING |
| 1 | SHELL | 1 | SPCC/BRASS | NICKE PLATING |
| ITEM | PART NAME | Q' TY/PCS | MATETIALS | NOTE |


| | | | | | | | | | | | | | | | |
|---------|----------|------------------|---------|----------|------------------------|--------------|------------|--|-----------------------------|--|---------------------|--------------|-------------------------|--|--|
| | | | | | 一般公差 GENERAL TOLERANCE | | 绘图 DR. 李兴泽 | | 料号 PART NO. W-USB2-BT90-K22 | | 文件编号 NUMBER ENDPT01 | | TERMINAL&CONNECTORS | | |
| | | | | | X.X ±0.30 | X* ±2' | 校对 CHK. | | 品名TITLE USB BF 90度弯脚 | | | 比例 SCALE 1/1 | | | |
| | | | | | X.XX ±0.20 | X.X* ±1' | 审核 CHK. | | | | | | | | |
| | | | | | X.XXX ±0.10 | ▲ MAJOR DIM. | 核准 APPD. | | | | | | | | |
| | | | | | 单位 UNIT mm | | | | | | | | | | |
| A0 | 20.04.28 | 新图面发行 | 李兴泽 | | | | | | | | | | | | |
| 版次 REV. | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. | | | | | | | | | | | |

环保物料


包装方式如下图:

1. 把USB BF 90度DIP成品, 依图所示放入专用吸塑盘内. 每盘装100PCS;注意产品放置方向. (如下图).

放置方向

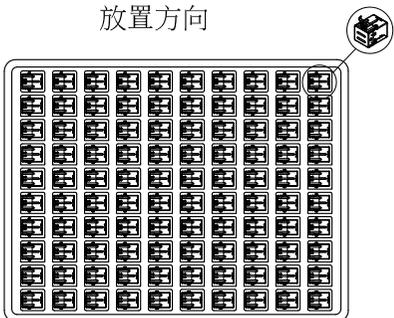



2. 莉品放雛100PCS后,合上上盖(如下芈).

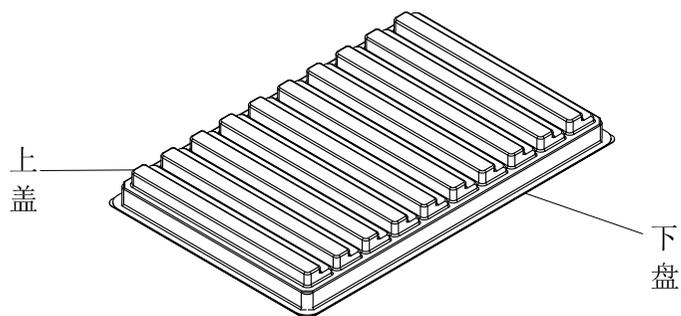


吸塑盘: 25.3*20.5*1.5CM

3. 将装好盘并全检好的产品按每5盘一捆的叠起来, 按图示用PE模捆扎后装入纸箱, 每箱装4捆, 共计2000PCS

一捆产品5盘
共计500PCS

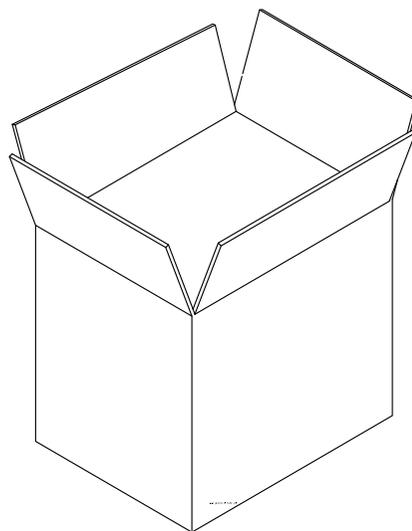

4. 外箱用透明胶带封纸贴相应标签.

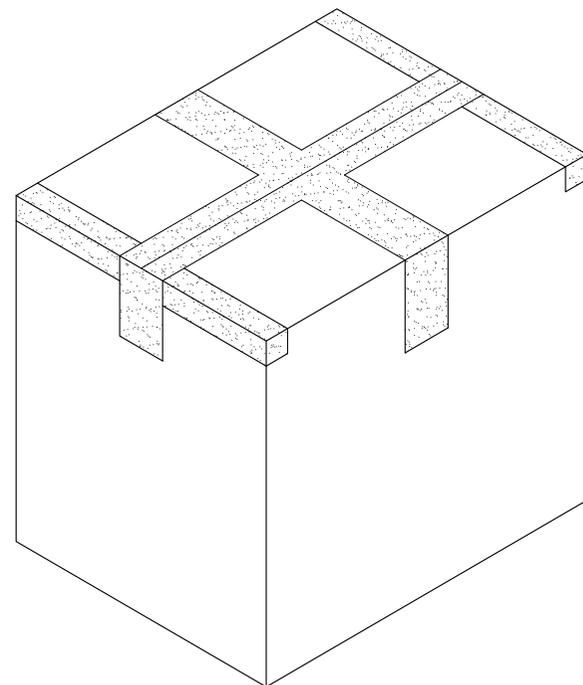

外箱: 27.3*22*34.5CM

| | | | | | | | | | | | | | | |
|---------|---------|------------------|---------|----------|------------------------|--------------|----------|-----------------|--|-------------------|--|-------------------------|-------|---------|
| | | | | | 一般公差 GENERAL TOLERANCE | | 绘图 DR. | 料号 PART NO. | | 文件编号 NUMBER | | TERMINAL&CONNECTORS | | |
| | | | | | X.X ±0.30 | X' ±2' | 校对 CHK. | W-USB2-BT90-K22 | | ENDPT01 | | | | |
| | | | | | X.XX ±0.20 | X.X' ±1' | 审核 CHK. | 品名 TITLE | | USB BF 90度DIP 包装图 | | 比例 SCALE | SHEET | 版次 REV. |
| | | | | | X.XXX ±0.10 | ▲ MAJOR DIM. | 核准 APPD. | | | | | 1/1 | 1/1 | A1 |
| 版次 REV. | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. | 单位 UNIT | mm | | | | | | | | |