

1 2 3 4 5 6 7 8

A

B

C





D

E


F

G

H

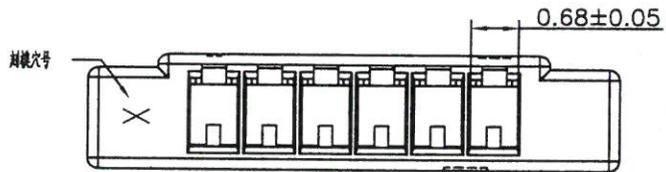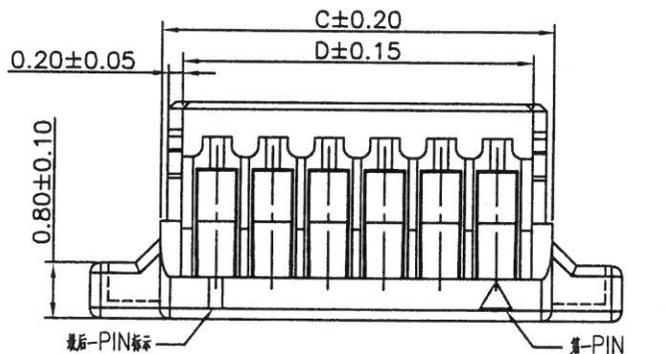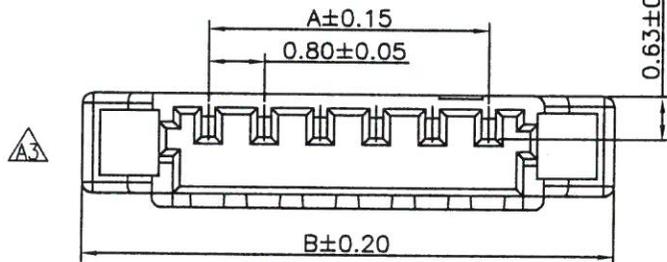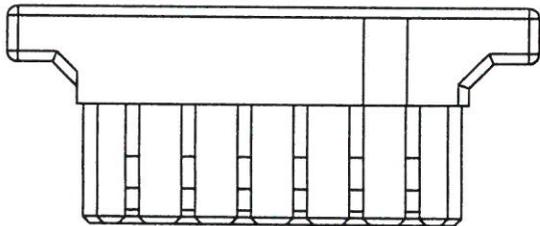


Specifications:
 Rated Voltage : 30V AC/DC
 Rated Current : 1A AC,DC(AWG 28#)
 Withstand Voltage : 200V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

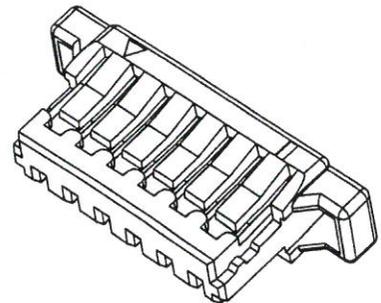

50801H00-NP-T-S7-HF-NK
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ T : Mount type
- ⑤ S7 : S7 Type
- ⑥ HF : Halogen Free
- ⑦ NK : No Mark

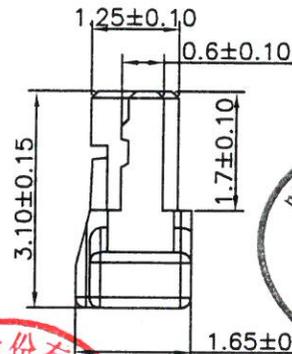

Circuits Part No	Dimensions			
	A	B	C	D
2P	--	4.40	2.40	1.80
3P	1.60	5.20	3.20	2.60
4P	2.40	6.00	4.00	3.40
5P	3.20	6.80	4.80	4.20
6P	4.00	7.60	5.60	5.00
7P	4.80	8.40	6.40	5.80
8P	5.60	9.20	7.20	6.60
9P	6.40	10.00	8.00	7.40
10P	7.20	10.80	8.80	8.20
11P	8.00	11.60	9.60	9.00
12P	8.80	12.40	10.40	9.80
13P	9.60	13.20	11.20	10.60
14P	10.40	14.00	12.00	11.40
15P	11.20	14.80	12.80	12.20
16P	12.00	15.60	13.60	13.00
17P	12.80	16.40	14.40	13.80
18P	13.60	17.20	15.20	14.60
19P	14.40	18.00	16.00	15.40
20P	15.20	18.80	16.80	16.20
21P	16.00	19.60	17.60	17.00
22P	16.80	20.40	18.40	17.80
23P	17.60	21.20	19.20	18.60
24P	18.40	22.00	20.00	19.40
25P	19.20	22.80	20.80	20.20



REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE:	NAME	DATE
A0	新图面发行	16.06.28		SIZE: A4	LINEAR	ANGLES	1:1	
A1	变更公司名称	17.03.20	0.0±0.25		X° REF±6°	APPROVED	Nelson	22.03.31
A2	HR2011260344	20.12.14	0.00±0.15		X° ±3°	DESIGNER	VM	22.03.31
A3	ECN20220330085	22.03.31	0.000±0.08		X° X'±2°	DRAWN	Fau	22.03.31

Part No.	Material	Color
50801H00-NP-T-S7-HF-NK	LCP,UL94V-0	Natural(Beige)

PART. NO:	50801H00-NP-T-S7-HF-NK	DWG. NO:	ENDE05
TITLE:	0.80mm PITCH HOUSING		

 TERMINAL&CONNECTORS		REV: A3	SHEET: 1/1
-------------------------	--	---------	------------

1 2 3 4 5 6 7 8