




RoHS
HF

Date Code




YYMMDD

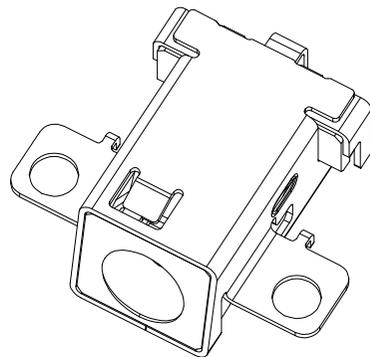

3D VIEW

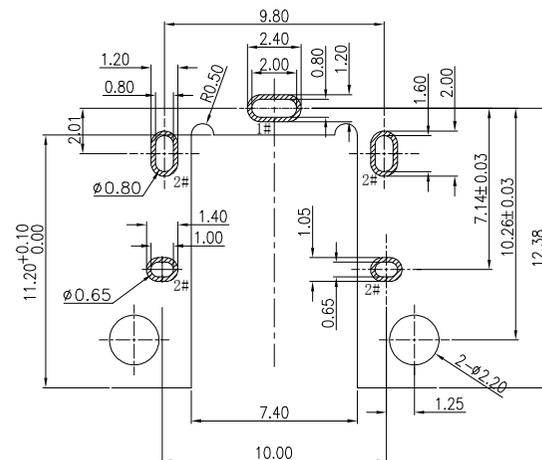
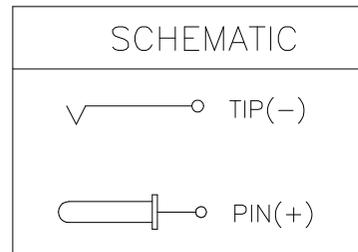


RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.02mm

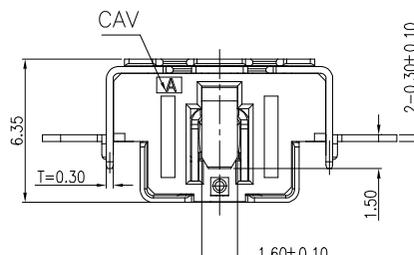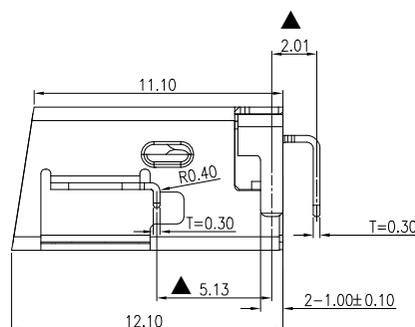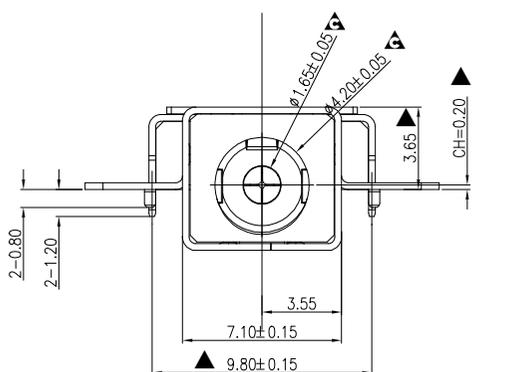

J0-4 C02 D R 0 2 9 0-A1 01
1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC JACK
- 2.4:∅4.0mm
- 3.C02=沉板中心高0.2mm
- 4.D:DIP
- 5.R:90°
- 6.0:带外壳
- 7.2: 2PIN
- 8.9:9T
- 9.柱子/啜啜 0:无柱无啜啜
- 10.TYPE 码 A1:带螺丝孔
- 11.Contact Area plating on contacts 01: Au 1u"

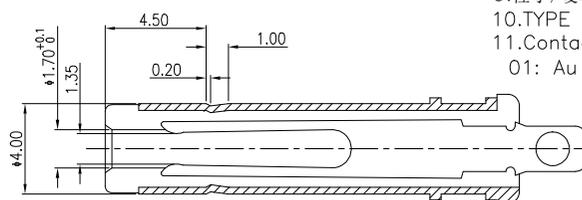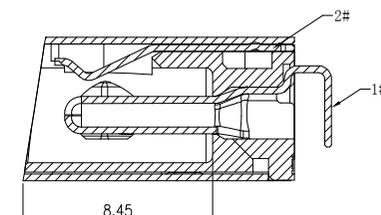

MATING PLUG

SPECIFICATION:


- 1. Electrical characteristics
 - 1.1 Current rating:DC 5.7A Max.
 - 1.2 Voltage rating:DC 25V
 - 1.3 Contact resistance:50mΩ Max.
 - 1.4 Insulation resistance:1000MΩ Min. (500V DC)
 - 1.5 Withstanding voltage:500V AC
- 2. Mechanical characteristics
 - 2.1 Life test:10000 cycles Min.
 - 2.2 Mating force:2.0Kgf Max.
Unmating force:0.7Kgf Min.

NO.	PART NAME	Q' TY	MATERIAL	DESCRIPTION
①	SHIELDING	1	STAINLESS STEEL	50u"Ni Min. PLATING
②	PIN(+)	1	BRASS	Ni 50u"Min. Over all Contact Area Au 1u"Min. & Matte Tin 60u"Min. on Solder Tail.
③	TIP(-)	1	COPPER ALLOY	
④	HOUSING	1	PA9T, UL94 V-0	BLACK




REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
AO	NEW REVISION	24.03.07	LINEAR	1:1	Frey Yang	24.03.07	J0-4C02DR0290-A101	ENDE05
			ANGLES	APPROVED	Daniel Dong	24.03.07	TITLE	
			0.0±0.30	DESIGNER	Micky Ma	24.03.07	∅4.0x1.70 DC Jack 3pin CH=0.2	
			0.00±0.20	DRAWN			L12.1 DIP 斜口带双锁孔	
			0.000±0.10					



RoHS
HF

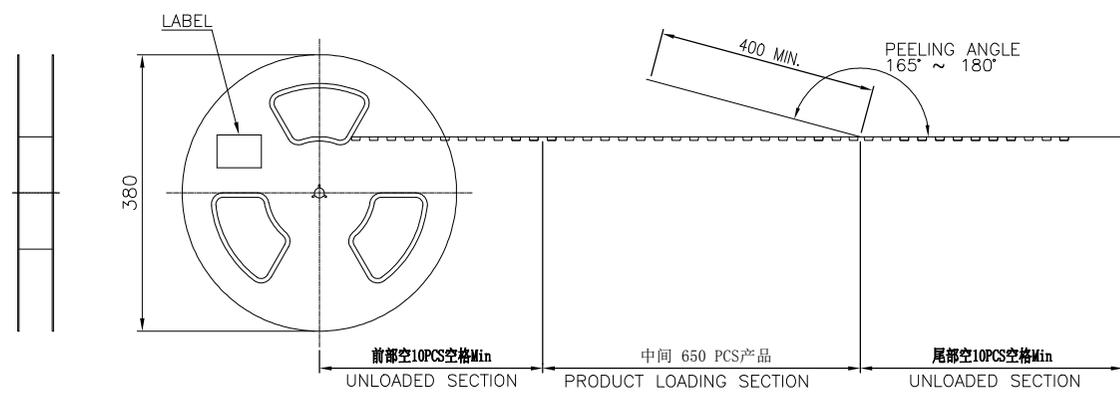

USER DIRECTION OF UNREELING

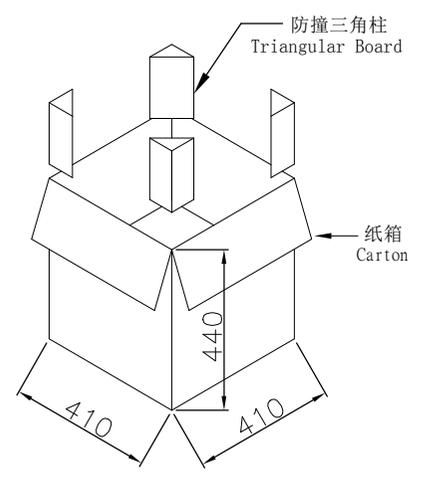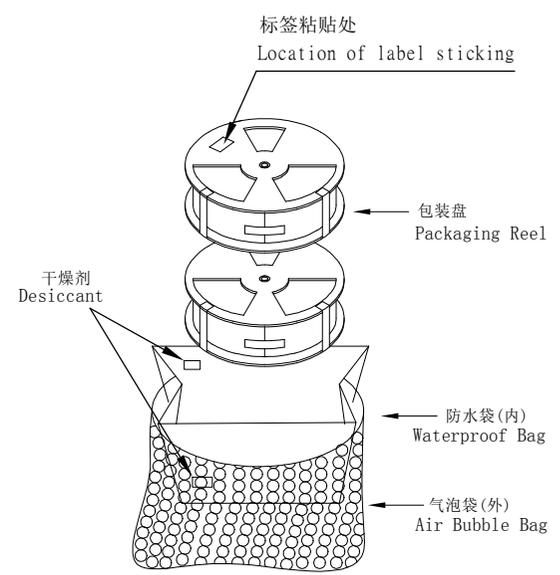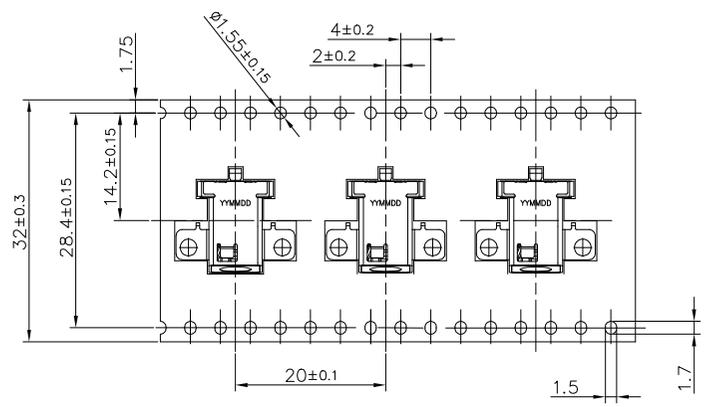

NOTE:

- MATERIAL:
BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT COLOR. (透明色冷封)
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2~1.0N (20~100gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

650	11	7150 PCS	-- KG	--KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
AO	NEW REVISION	24.03.07		LINEAR	ANGLES	1:1								
				0.00±0.20	X° REF±6°	APPROVED	Frey Yang	24.03.07	J0-4C02DR0290-A101	ENDE05				
				0.00±0.10	X° ±3°	DESIGNER	Daniel Dong	24.03.07	TITLE φ 4.0x1.70 DC Jack 3pin CH=0.2 L12.1 DIP 斜口带双锁孔					
				0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	24.03.07		REV	AO	SHEET	2/2	