
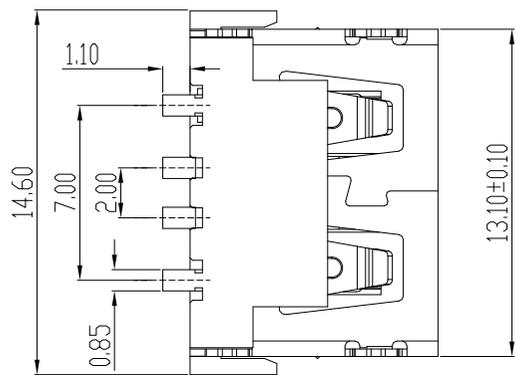
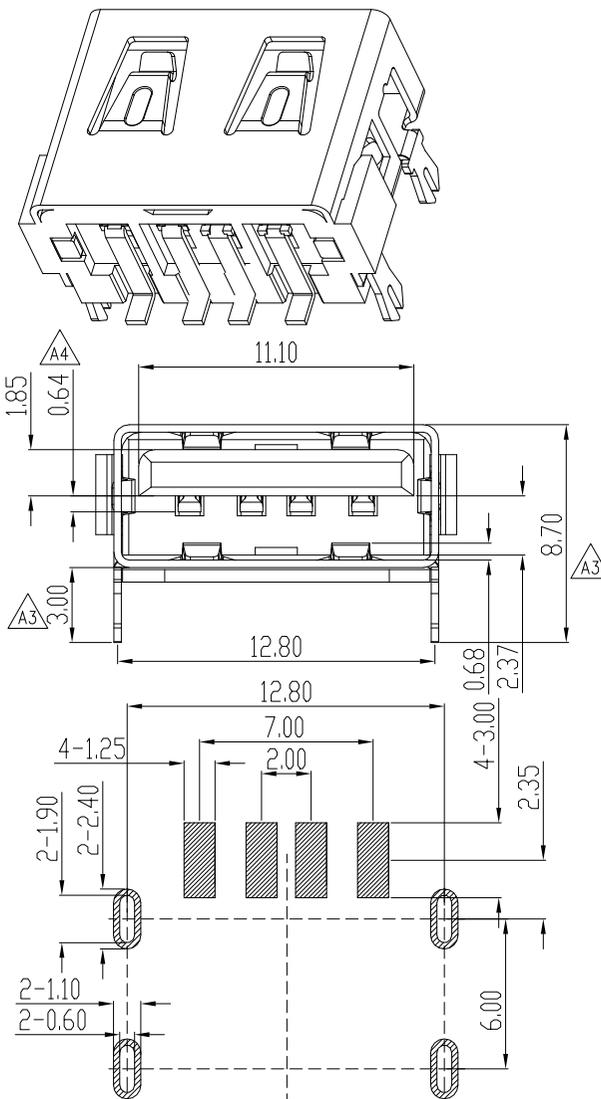


环保物料

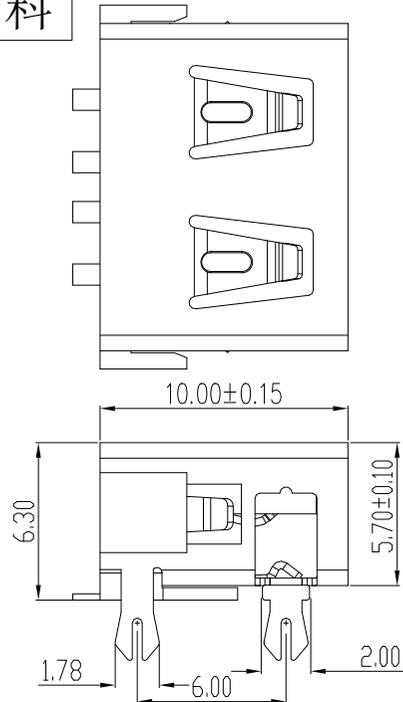

RECOMMENDED P.C.BOARD LAYOUT (TOP VIEW)
TOLERANCES UNLESS OTHERWISE SPEC.±0.05

NOTES:

- MATERIAL:
Housing: LCP E130i,Black.
Contact: C2680.
Shell: C2680.
- PLATING:
Contact: 1u" Au plating on contact area
50 u" matte tin on the solder tails.
Shell: 80u" nickel underplating over all;
- MECHANICAL CHARACTERISTIC
Mating Force: 3.57Kgf max.
Unmating Force: 1.02Kgf min
Terminal Retention: 1.0kgf(MIN)
- ELECTRICAL CHARACTERISTIC
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000MEGA ohms MIN
Dielectric Withstanding Voltage: 500V AC Min

5. ORDER INFORMATION:

N2A-F A000 S R L A 2-XX 01
1 2 3 4 5 6 7 8 9 10

- N2A=USB 2.0 A TYPE
- F=FEMALE
- A000=普通规格
- S=SMT
- R=90°
- L=LCP
- A=黑色
- 2=鱼叉脚
- A0=不带翻边吸塑盒包装 AR=不带翻边载带包装
- CONTACT AREA PLATING ON CONTACTS
01=G/F 03=Au 3u"
05=Au 5u" 10=Au 10u"
15=Au 15u" 30=Au 30u"

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	
				1:1					
A0	新图面发行	21.01.29	LINEAR	APPROVED			N2A-FA000SRLA2-AR01	ENDE05	
A2	增加铁壳工艺缺口 $\triangle A_2$	22.10.21	0.0±0.30	DESIGNER			TITLE		
A3	增加尺寸 $\triangle A_3$	23.09.27	0.00±0.25	DRAWN	Micky Ma	23.11.10	USB 2.0 ON BOARD TYPE		
A4	修改弹高尺寸 $\triangle A_4$	23.11.10	0.000±0.10					REV	A4
			ANGLES					SHEET	1/1
			X° REF±6°						
			X° ±3°						
			X° X' ±2°						

1

2

3

4



5

6

7

8

环保物料

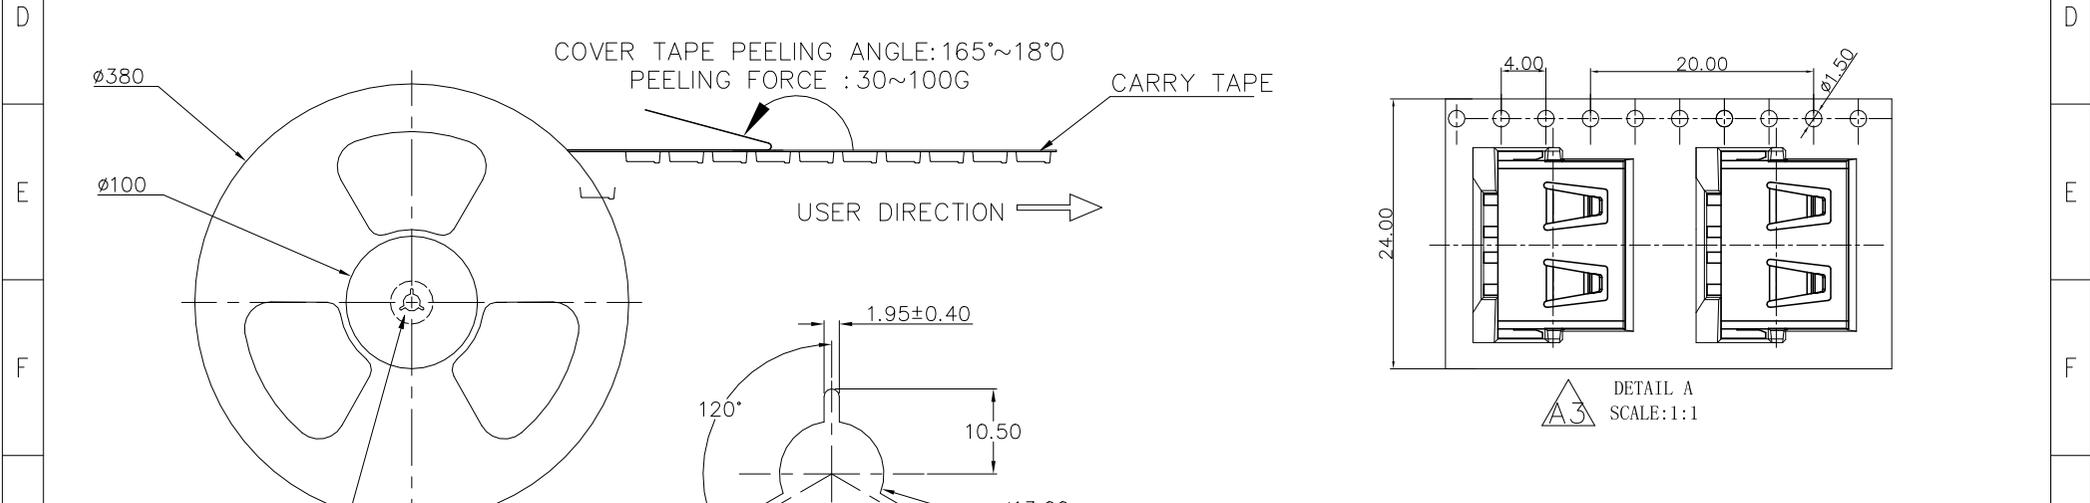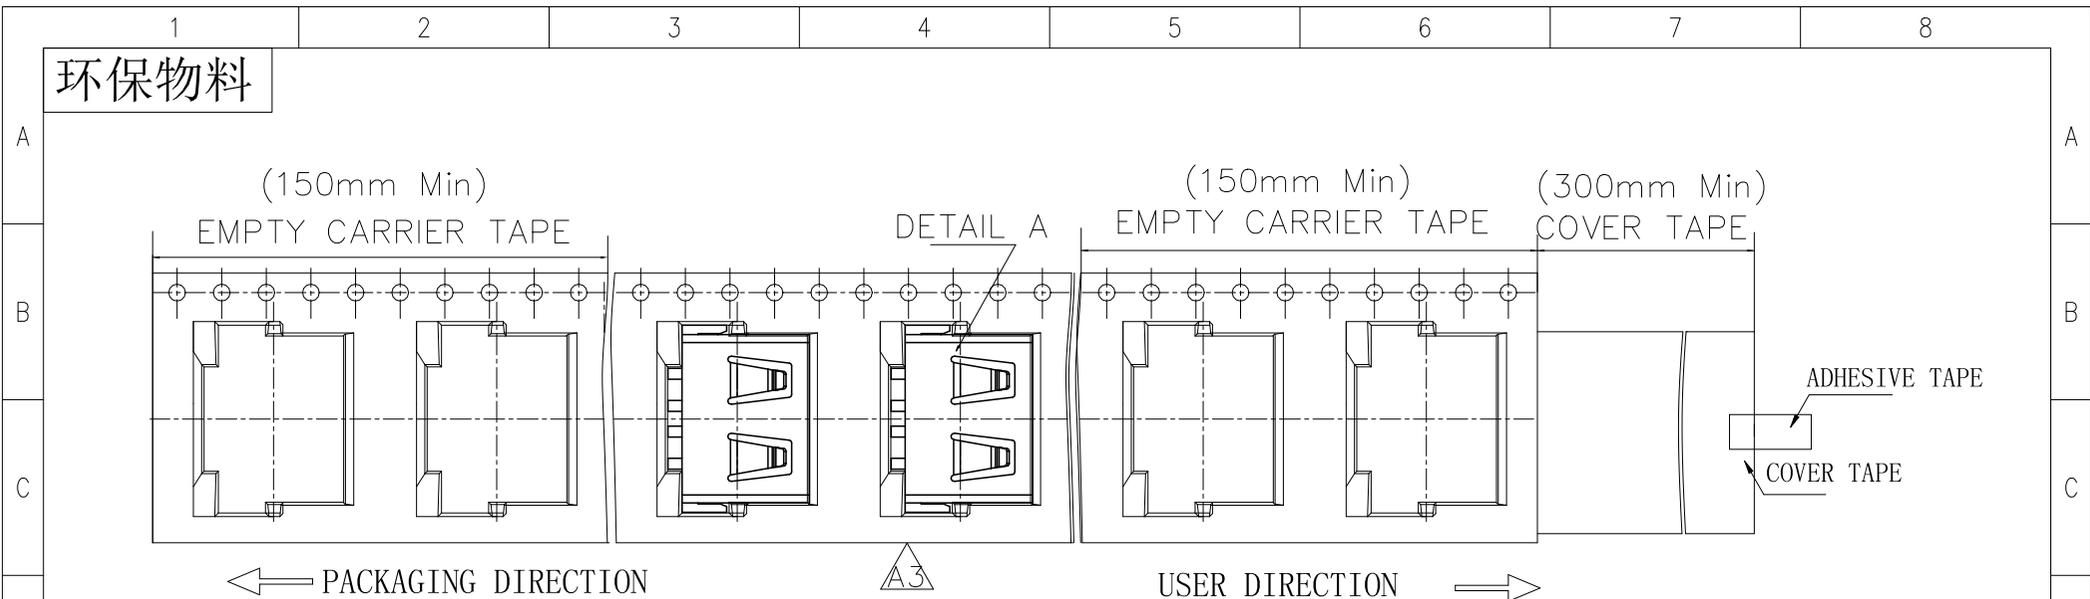

1	500	10	5000	390X390X440
ITEM	QTY/REEL	REEL/CARTON	QTY/CARTON	CARTON SIZE

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	21.01.29		LINEAR	ANGLES	1:1								
A1	换图框发行	23.08.14	0.0 ± 0.30	$X^{\circ} \text{ REF}\pm 6^{\circ}$	APPROVED									
A2	载带变更方式	23.08.22	UNIT: MM	0.00 ± 0.25	$X^{\circ} \pm 3^{\circ}$	DESIGNER								
A3	载带变更方式及数量	23.11.16	SIZE: A4	0.000 ± 0.10	$X^{\circ} X' \pm 2^{\circ}$	DRAWN	Micky Ma	23.11.16	N2A-FA000SRLA2-AR01	ENDE05	REV	A3	SHEET	1/1