
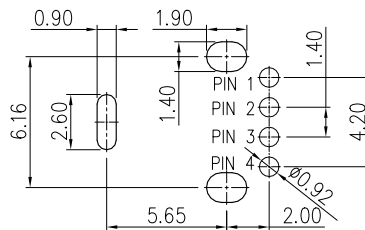
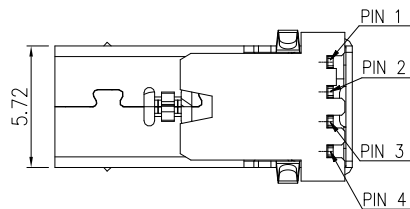
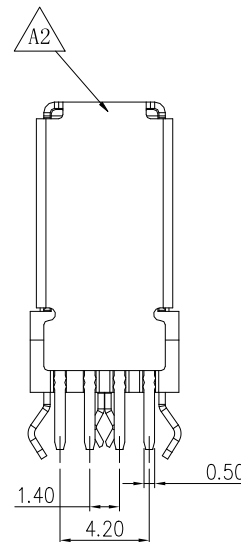
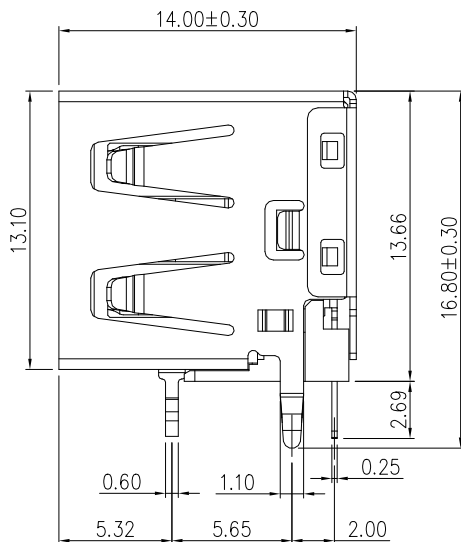


环保物料

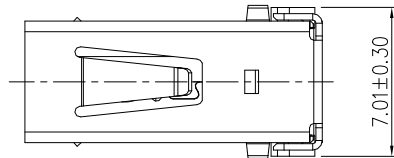

RECOMMENDED PCB LAYOUT(BOTTOM VIEW)
THICKNESS 1.60MM;DEFAULT TOLERANCE:±0.05

ELECTRICAL CHARACTERISTICS:
CONTACT CURRENT RATING : 1.5AMPERES.
DIELECTRIC WITHSTANDING VOLTAGE : AC 500V R.M.S.
INSULATION RESISTANCE : 1000 MEGOHMS MINIMUM AT DC 500V.
CONTACT RESISTANCE : 30 MILLIOHM MAXIMUM.
OPERATING TEMPERATURE : -40°TO +85°.

MECHANICAL CHARACTERISTICS:
CONTACT INSERTION FORCE : 3.57KG MAXIMUM.
CONTACT SEPARATION FORCE : 1.0KG MINIMUM.

MATERIALS:
HOUSING: PBT+30% G/F Black
CONTACT: BRASS C2680.
SHELL: SPCC/BRASS C2680;

CONTACTS: GOLD FLASHED 1U",3U",5U",10U",15U",30U".
END OF NI-50U"MIN
SHELL: NICKEL PLATED OVER 30~100U" MIN.

N2A-F H000 D R B X 1-XX XX
1 2 3 4 5 6 7 8 9 10


- 1.N2A:USB 2.0 A TYPE
- 2.F:FEMALE
- 3.H000= 侧插规格
- 4.D:DIP
- 5.R:90°
- 6.B:PBT
- 7.COLOR A: 黑色 W: 白色 B: 兰色
- 8.外壳脚1: 青蛙脚
- 9.TYPE 码:A0: 不带翻边, SHELL材质SPCC
AP: 不带翻边, SHELL材质C2680
- 10.Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	18.08.16		LINEAR	ANGLES	1:1			N2A-FH000DRBA1-AP01	ENDE05				
A1	换图框发行	23.06.14	UNIT: MM	0.0±0.30	X° REF±6°	APPROVED			TITLE USB AF 侧插短体90度DIP"0"型脚无卷边		REV	A3	SHEET	1/1
A2	按实物更新图面	23.06.16		0.00±0.25	X° ±3°	DESIGNER								
A3	料号增加SHELL材质说明	23.08.15		0.000±0.10	X° X' ±2°	DRAWN	Dalan Dai	23.08.15						

环保物料


1. 把已全检好的 USB AF 侧插短体 成品, 依图所示放入专用的吸塑盘内. 每盘装100PCS; 注意产品放置方向. (如下图).

放置方向

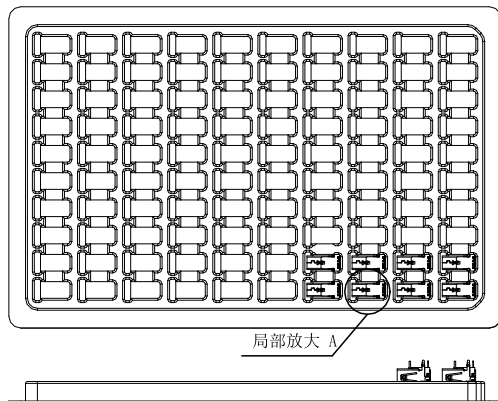


2. 产品放满100PCS 后, 将上盖与 下盖扣合(如下图).

上盖

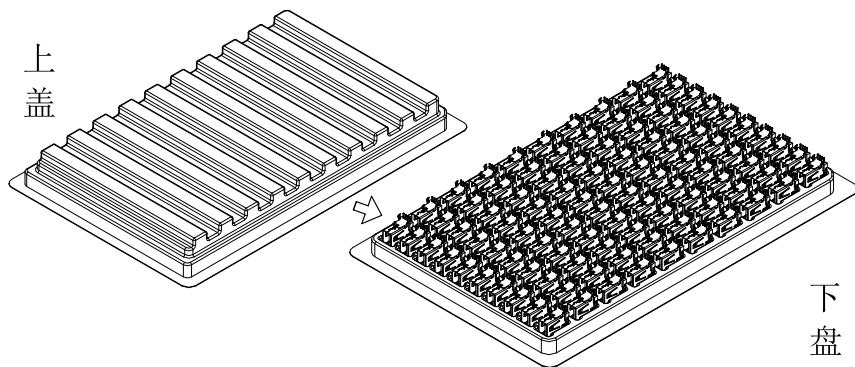


下盘

3. 装好成品的包装盘, 按图示叠起5层, 并按照图示用PE膜捆绑.

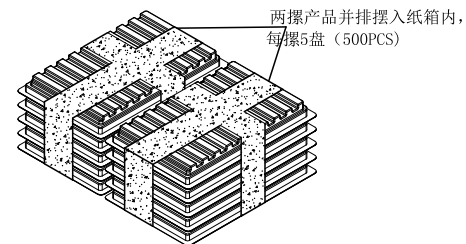

每箱摆3层产品, 共计3KPCS

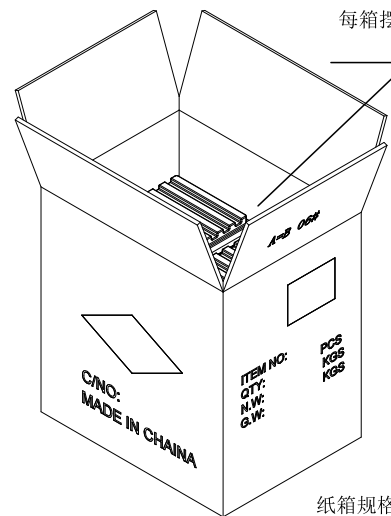

纸箱规格: 285*215*300mm

4. 用透明胶带封箱及贴相应标签。

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	18. 08. 16		LINEAR	ANGLES	APPROVED			N2A-FH000DRBA1-AP01	ENDE05				
A1	换图框发行	23. 08. 15		0. 0±0. 30	X° REF±6°									
A2	料号增加SHELL材质说明	23. 08. 15		UNIT: MM	0. 00±0. 25	X° ±3°	DESIGNER			TITLE				
			SIZE: A4	0. 000±0. 10	X° X' ±2°	DRAWN	Dalan Dai	23. 08. 15	USB AF 侧插短体90度DIP“0”型脚无卷边		REV	A2	SHEET	1/1