

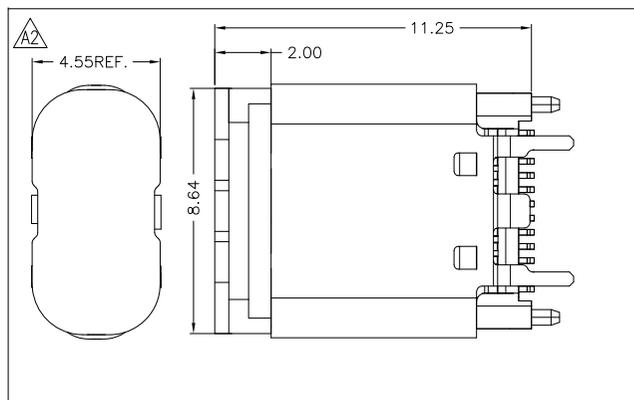






# 环保物料

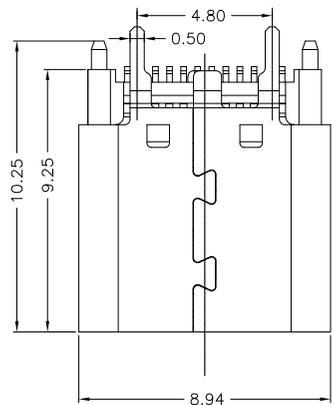


NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

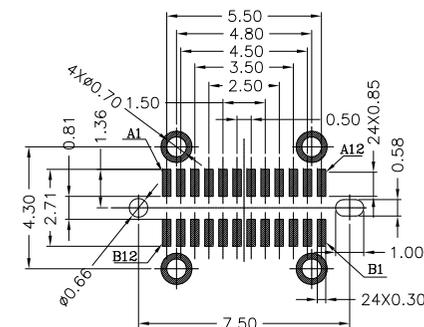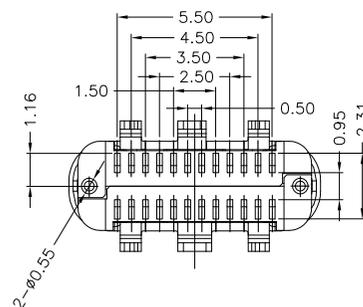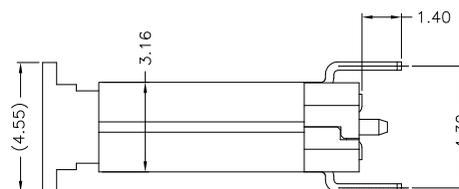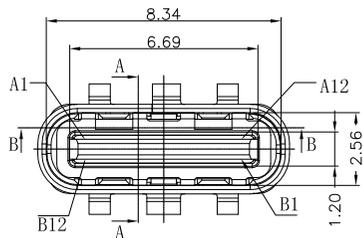

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)  
TOLERANCE UNSPECIFIED ±0.05mm



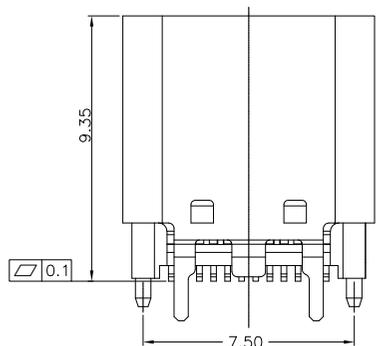


A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	COVER	LCP-6808	BLACK
5	HOUSING	LCP-6808	BLACK
4	SHELL	SUS-304	NI PLATED
3	Mid-PLATE	SUS-301	---
2	EMC SPRING	SUS-304	---
1	CONTACT	C2680	Gold Flash(1u")
NO.	DESCRIPTION	MATERIAL	REMARKS



REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.09.03	LINEAR	ANGLES	1:1			UC-FE930SV-ACLA001	ENDE05				
A1	更新图框发行	21.12.07	0.0±0.30	X° REF±6°	APPROVED			TITLE					
A2	更新吸取盖	22.06.22	0.00±0.20	X° ±3°	DESIGNER			USB TYPC CF 24P 直立式 H=9.30mm					
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	21.12.07		REV	A1	SHEET	1/1

# 环保物料

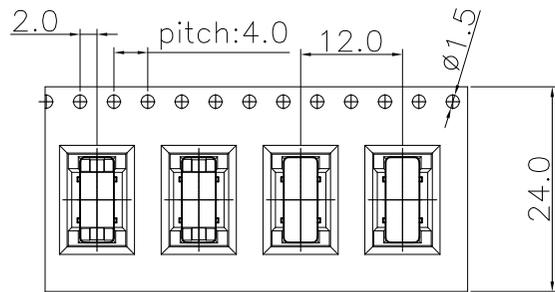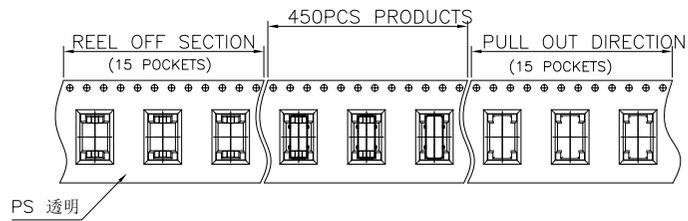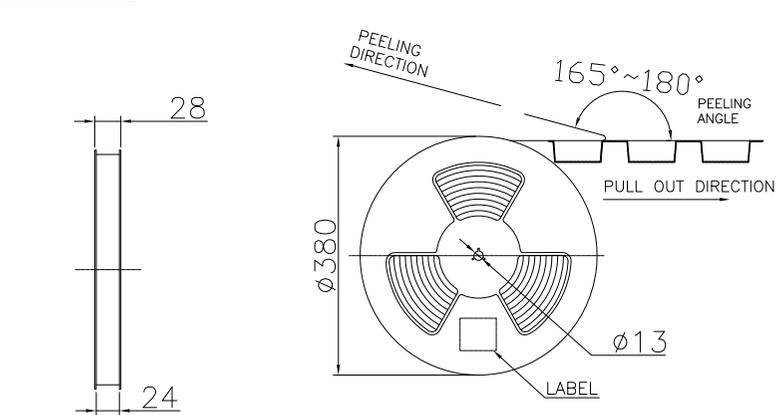

客户拉出方向

10 DISK

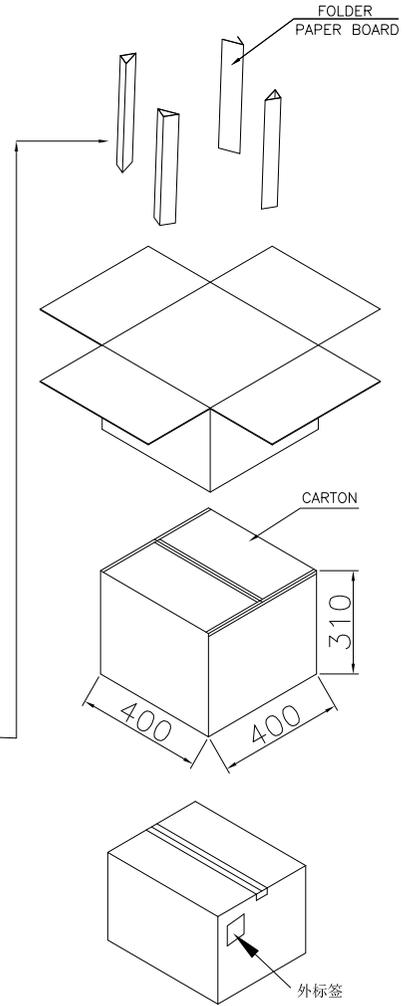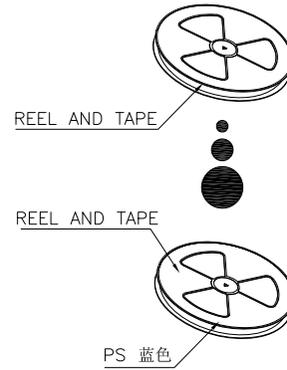

## NOTE:

1. QUANTITY/REEL: 450 PCS  
數量/卷: 450 PCS  
QUANTITY/INNER CARTON: 450 X 10 = 4500 PCS  
數量/箱: 450 X 10 = 4500 PCS
2. FREE 15 CAVE IN THE FRONT CARRIER AND FREE 15 CAVE IN THE END CARRIER.  
包裝帶內圈空15格, 外圈空15格.
3. 上帶採用自粘方式

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS		
A0	新圖面發行	21.09.03		LINEAR	ANGLES	APPROVED			UC-FE930SV-ACLA001	ENDE05			
A1	更新圖框發行	21.12.07	SIZE: A4	0.0 ± 0.30	X° REF ± 6°	DESIGNER			TITLE				
A2	更新載帶寬度	22.06.22		0.00 ± 0.20	X° ± 3°	DRAWN	Micky Ma	22.06.22				USB TYPC CF 24P 直立式 H=9.30mm	
				0.000 ± 0.10	X° X' ± 2°				REV	A2	SHEET	1/1	