

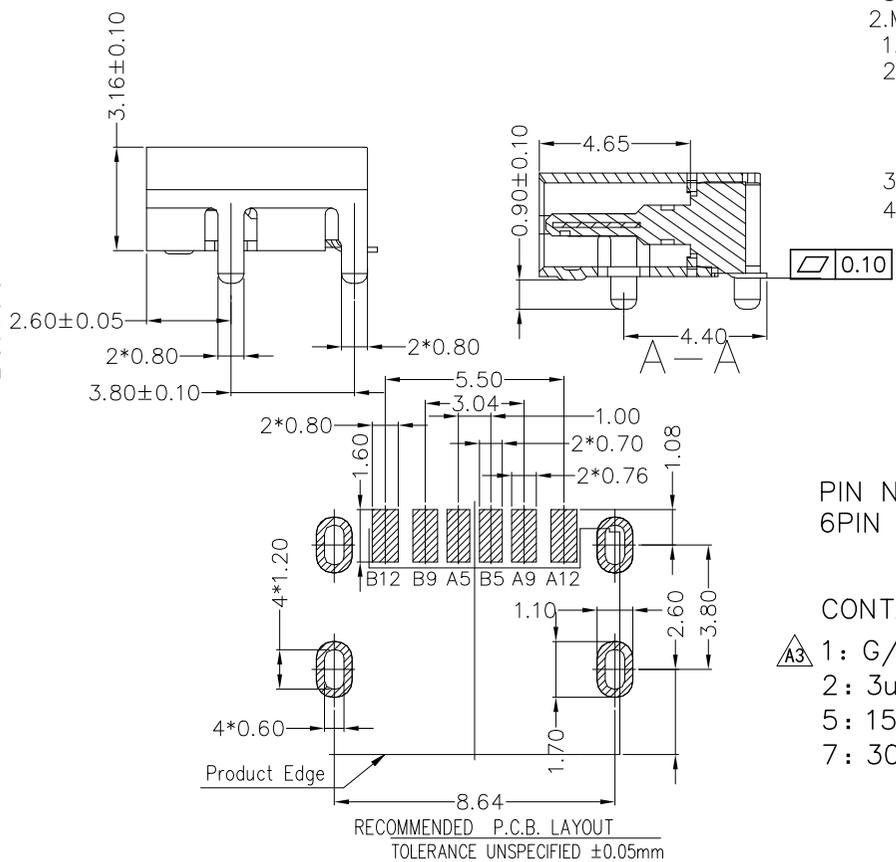


RoHS2.0

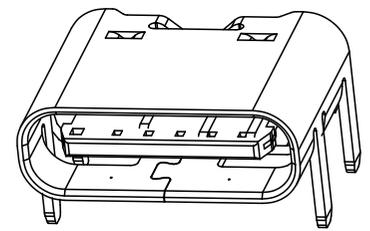

A  
B  
C  
D  
E  
F  
G

A  
B  
C  
D  
E  
F  
G

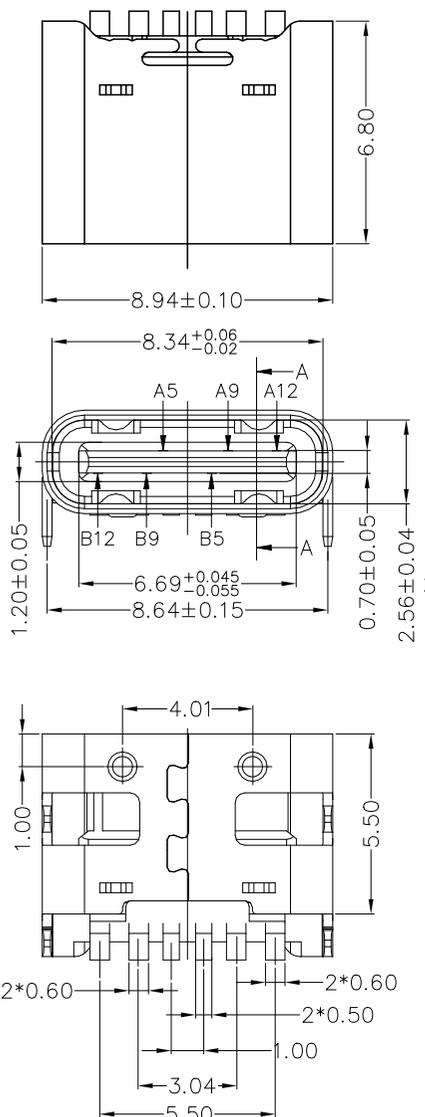

NOTES:  
 1.SPECIFICATION:  
 1. CURRENT RATING: 3.0A MAX  
 2. VOLTAGE RATING: 20V DC/AC;  
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C  
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX  
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.  
 6. INSERTION FORCE : 5N~20N  
 7. UNMATING FORCE: 8N~20N,AFTER DURABILITY TEST: 6N~20N.  
 8. DURABILITY: 10000 CYCLES  
 2.MATERIAL:  
 1.MOLDING: HIGH TEMPERATURE PLASTIC UL94 V-0  
 2.CONTACT: COPPER ALLOY  
 GOLD PLATED ON CONTACT AREA,  
 SN 80u" Min ON SOLDER AREA,  
 50u" NICKEL PLATING OVER ALL.  
 3.CENTER CLIP: STAINLESS STEEL  
 4.SHELL: STAINLESS STEEL 50u" NICKEL PLATING OVER ALL.

UCB11-06BB0 1 A N L-R  
 PIN NUMBER: 6PIN  
 CONTACT: \_\_\_\_\_  
 R: ROHS  
 PACK: L: TAPE REEL  
 COLOR: A: Black

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

RECOMMENDED P.C.B. LAYOUT  
 TOLERANCE UNSPECIFIED ±0.05mm

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
A0	NEW RELEASE	2020. 5. 9	L INEAR	1: 1	SKY	2022. 12. 8	UCB11-06BB01ANL-R	ENDE05
A1	Change frame	2022. 11. 7	ANGLES	APPROVED	GSQ	2022. 12. 8		
A2	Add electroplating specification	2022. 11. 30	UNIT: MM	DESIGNER	YYG	2020. 5. 9	TITLE TYPE-C 6PIN SMT AF PASTER L=6.8MM	REV
A3	Add electroplating specification	2022. 12. 8	SIZE: A3	DRAWN				







1 2 3 4 5 6 7 8

RoHS2.0

说明:

1. 每卷前后各空16PCS, 尾部用美纹胶纸封住;
2. 将产品放满盘后, 再卷一圈保护带, 用美纹胶纸将其封住, 并贴上1Pcs物料标签;
3. 每15卷盘一叠共15000Pcs, **每盘1000PCS**. 并装入1个外箱内;
4. 在搬运过程中要轻拿轻放;
5. 在运输中不可堆放过多(1.5M最高), 不可有重压现象;
6. 跌落测试条件:  
成品箱从1.2米高度自由落体(一角三棱六面):  
a. 产品不可跑出下带凹槽;  
b. 产品不可有摔伤, 变形;  
c. 内包装材料不可严重破损.

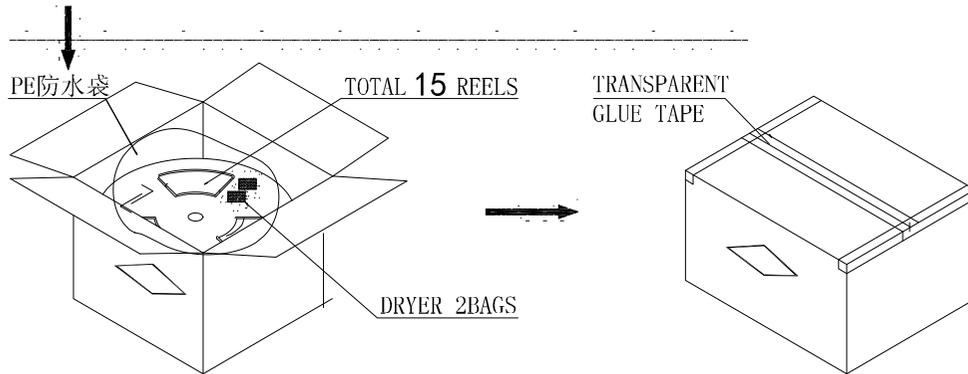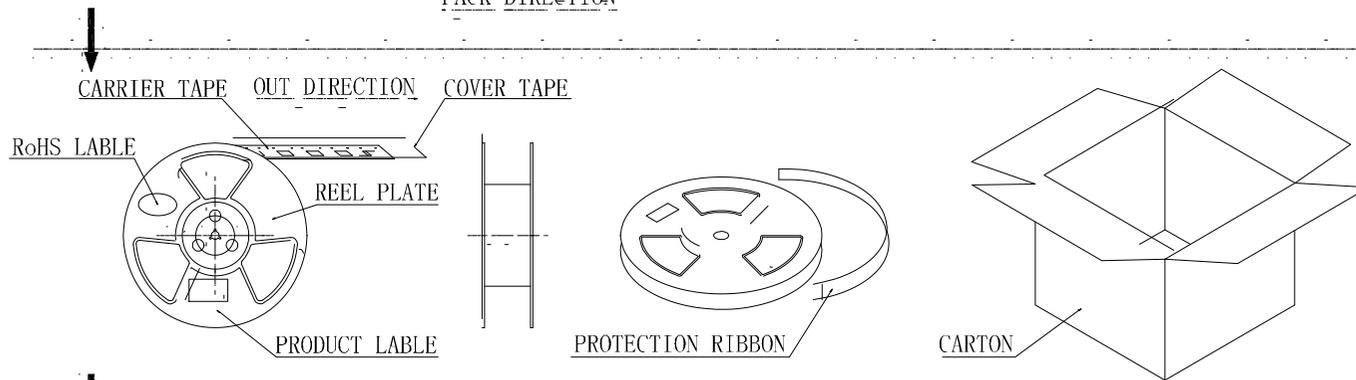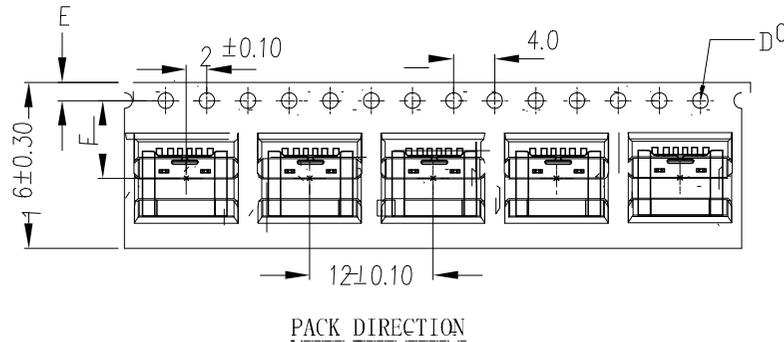

PCS/REEL	PCS/CARTON
1000	15000

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
A0	NEW RELEASE	2022.12.8		LINEAR	ANGLES	1:1				
				0.0±0.25	X° ±6°	APPROVED	-	-	TITLE TYPE-C 6PIN SMT AF PASTER L=6.8MM (PACKAGING DRAWINGS)	
				0.00±0.15	X° X' ±3°	DESIGNER				
			UNIT: MM	0.00±0.10	X° X' X'' ±2°	DRAWN	GSQ	2022.12.8		
			SIZE: A4							



REV	A0	SHEET	1/1
-----	----	-------	-----