

NOTES:

- MATERIAL:
 - OUTSIDE SHELL: SUS301R-1/2H T=0.20mm
 - INNER SHELL: SUS301R-1/2H T=0.20mm
 - SIGNAL: SUS301R-H T=0.10mm
 - RF PAD: SUS301R-H T=0.08mm
 - HOUSING: LCP+30%G.F. UL94UL-0 BLACK
 - TERMINAL: COPPER ALLOY T=0.10mm
- PLATING:
 - TERMINAL: SEE PIN
 - SHELL: MATTE Sn 60~200u"ON SOLDERING AREA NICKEL UNDER PLATED 50u"MIN.
- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 3.0 A
VOLTAGE RATING: 5.0 V
 - LLCR: VBUS& GND PINS: 40mΩ/PIN MAX
OTHER PINS : 40mΩ/PIN MAX
LLCR MAX. CHANGE OF ALL PINS: 10mΩ
 - INSULATION RESISTANCE: 100MΩ MIN.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 0.5~2.0kg.
 - WITHDRAWAL FORCE: 0.8~2.0kg.(INITIAL)
0.6~2.0kg.(AFTER LIFE TEST)
- LIFE TEST: 10000 CYCLES MIN

USB TYPE-C PIN ASSIGNMENTS:

A12	GND	B1	GND
A11	SSRXp2	B2	SSTXp2
A10	SSRXn2	B3	SSTXn2
A9	VBUS	B4	VBUS
A8	SBU1	B5	CC2
A7	Dn1	B6	Dp2
A6	Dp1	B7	Dn2
A5	CC1	B8	SBU2
A4	VBUS	B9	VBUS
A3	SSTXn1	B10	SSRXn1
A2	SSTXp1	B11	SSRXp1
A1	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

		一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽
		X.X ±0.30	X' ±2'	校对 CHK.	
		X.XX ±0.20	X.X' ±1'	审核 CHK.	
		X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	
A0	17.09.20	新图面发行	李兴泽		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	



JGTC 胜蓝科技股份有限公司
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

品名 TITLE
USB TYPE C Female CL=0.75mm

料号 PART NO. W-USB-CH075-TC20		
文件编号 NUMBER ENDPT01		
比例 SCALE 1/1	SHEET 1/1	版次 REV. A0

环保物料

检验规范

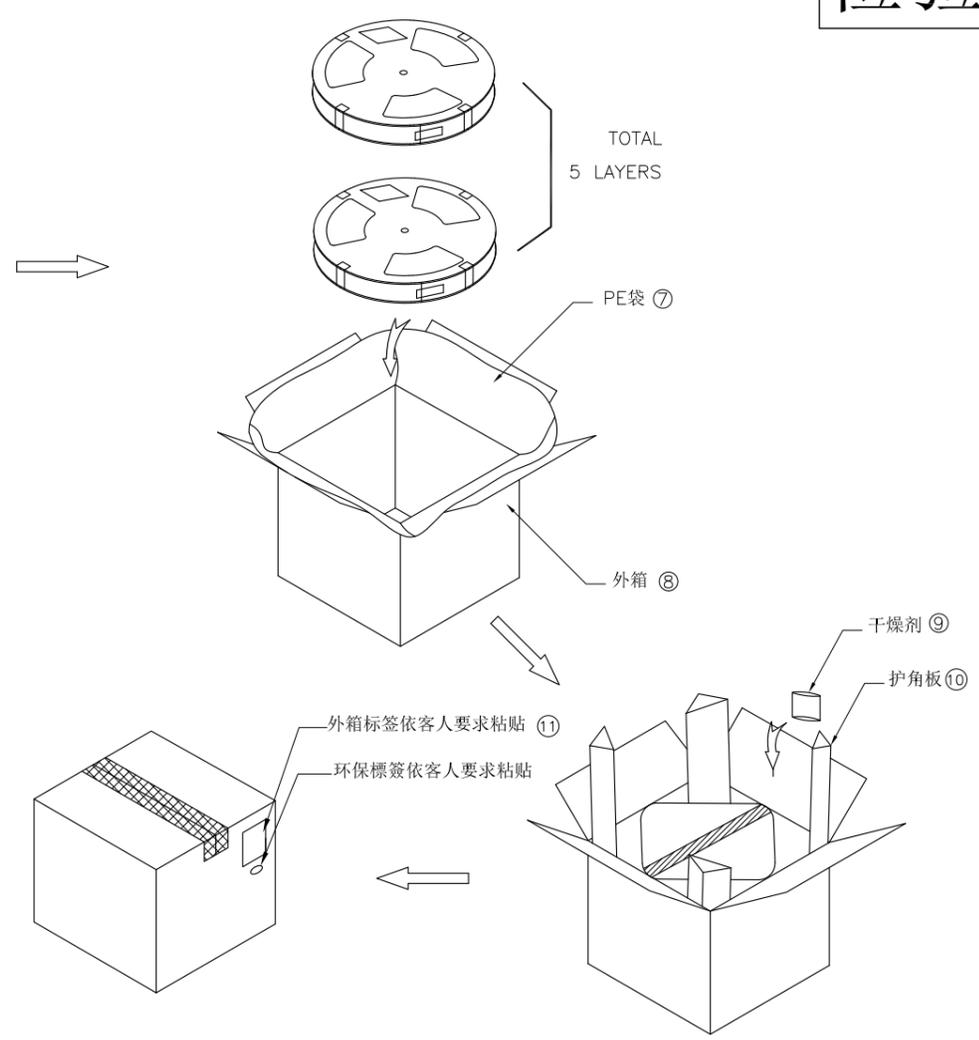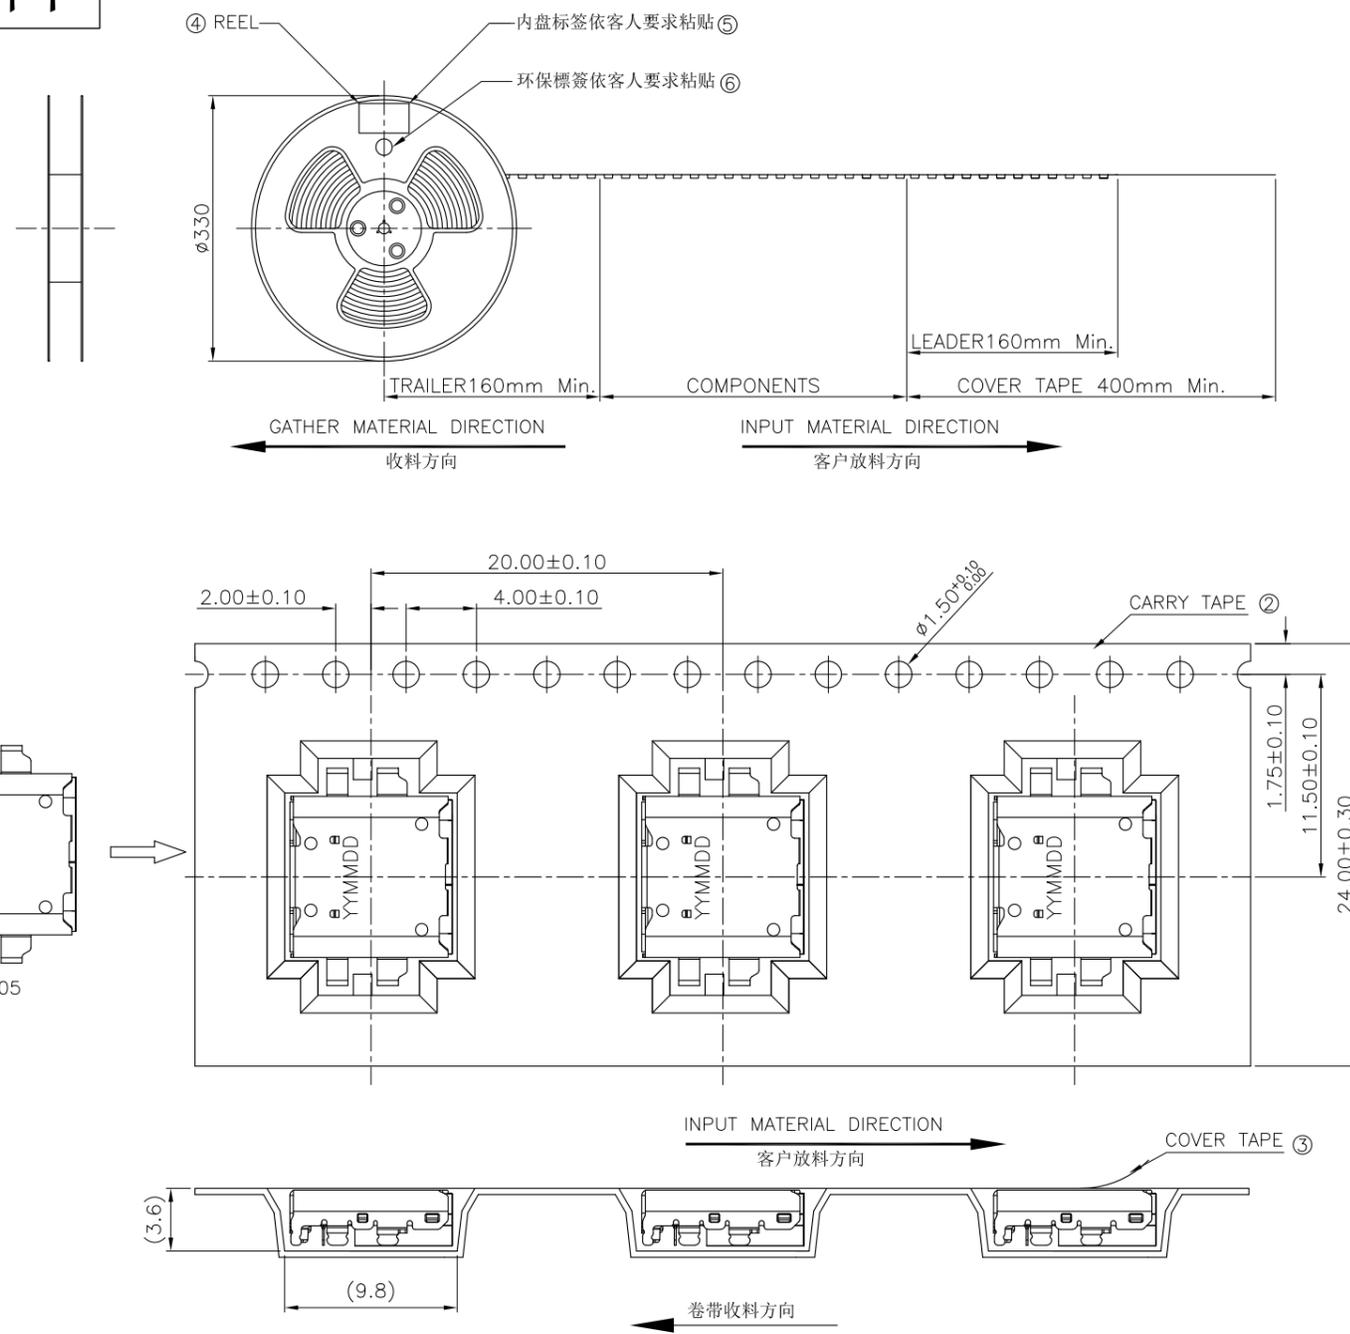

- Notes:
- 每卷卷带的开始端留160mm以上空格不装产品（参考值：30PCS），以实际包装数量装满后，结束端预留160mm以上空格不装产品（参考值：30PCS）。
 - 卷带用自封胶袋封口，1个卷盘放置700PCS产品；
 - 再绕一圈保护带，保护带最后重量约50mm，每个卷盘须贴一张条码标签和无卤标签（或依客人要求粘贴）；
 - 将PE袋套入外箱后，将5盘装好产品的卷盘依次放入纸箱，并在纸箱封角各放入干燥剂一袋；
 - 外箱外侧以胶带封口，每个外箱外侧图示位置贴一张条码标签和无卤标签（或依客人要求粘贴）；
 - COVER TAPE与CARRY TAPE剥离力：20g~120g；剥离角度：165°~175°；剥离速度：250~300mm/min；
 - 包装数量：700PCS/REEL，5REEL/CARTON，共3500PCS/CARTON；
 - 此部品必须符合《环境管理物质管控标准》要求。

项目品名	料号	规格	数量
① UC05	W-USB-CH075-TC20	USB TYPE C母座	3500PCS
② CARRY TAPE	PA-120-0211	W=24mm P=20mm L=15.2	5SET
③ COVER TAPE	PA-130-0004	W=20.7mm	155m
④ REEL	---	D=φ13" x24mm	5PCS
⑤ 内盘标签	---	---	5PCS
⑥ 环保标签	---	---	5PCS
⑦ PE袋	PA-200-0002	(400+250)x500x0.06mm	1PCS
⑧ 外箱	PA-011-0004	350x350x155mm K=K	1PCS
⑨ 干燥剂	---	---	2PCS
⑩ 护角板	PA-045-0002	100X100X140mm B=B	4PCS
⑪ 外箱标签	---	---	1PCS

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS		
					X.X ±0.30	X° ±2°	校对 CHK.		W-USB-CH075-TC20		ENDPT01				
					X.XX ±0.20	X.X° ±1°	审核 CHK.		品名 TITLE		比例 SCALE		SHEET		
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		USB 3.1 C TYPE FEMALE CH0.75		1/1		版次 REV.		
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm								A1	