

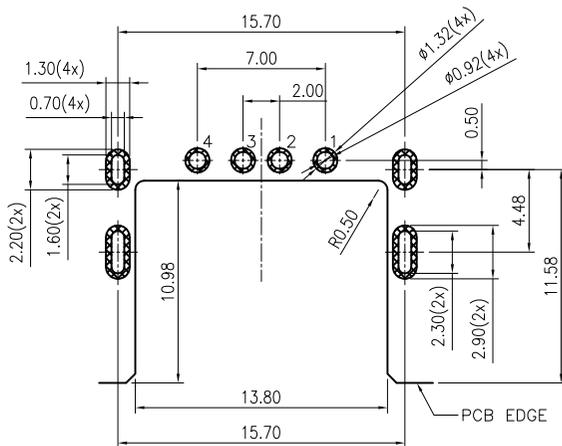
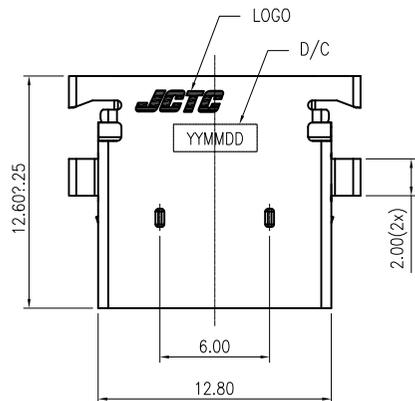
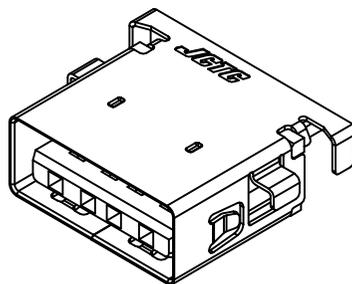
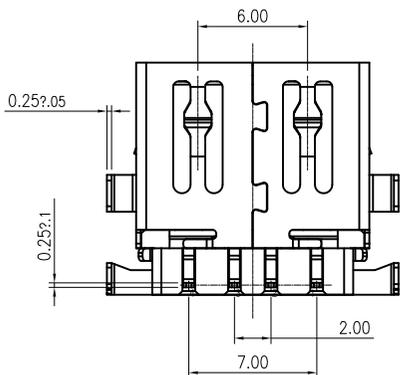
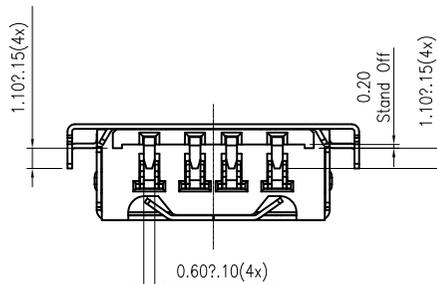


环保物料

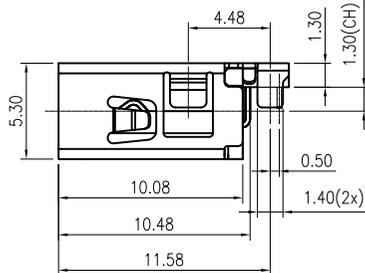

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES: ±0.05 (t=0.8~1.0)

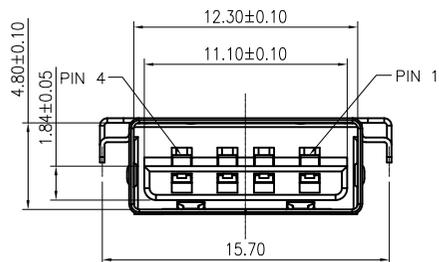

NOTES:

- MATERIAL:**
Housing: High Temperature Plastic.UL94V-0,Black.
Contact: Copper Alloy.
Shell: Stainless Steel.
- PLATING:**
Contact: Au 1u" Plated on Contact Area,
Matt-Sn 100u" Plated on Solder Tails.
Ni 50u" min UnderPlated.
Shell: Ni 50u"Min Plated All Over
- MECHANICAL CHARACTERISTIC**
Mating Force: 25N max.
Unmating Force: 7~20N(Initial);
10000 Cycles: No More Than 50% Form Initial,
10000 Cycles: Function Ok.
Durability: 10000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- ORDER INFORMATION:**


Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
Shell	Shield

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS	
A0	新图面发行	17.11.09	LINEAR	1:1	Frey Yang	22.09.02	W-USB2-CL130-023	ENDE05		
A1	更新图框发行	21.07.08	ANGLES	APPROVED	Daniel Dong	22.09.02				
A2	图框升级	22.09.02	0.00 ± 0.30 X° REF ± 6°	DESIGNER	Micky Ma	22.09.02	TITLE	USB2.0 SLIM REVERSE CL1.3 Non-CHAMFER		
			0.00 ± 0.25 X° ± 3°	DRAWN					REV	A2


PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.



PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-USB2-CL130-023	5500 (PCS)	500 (PCS)	11

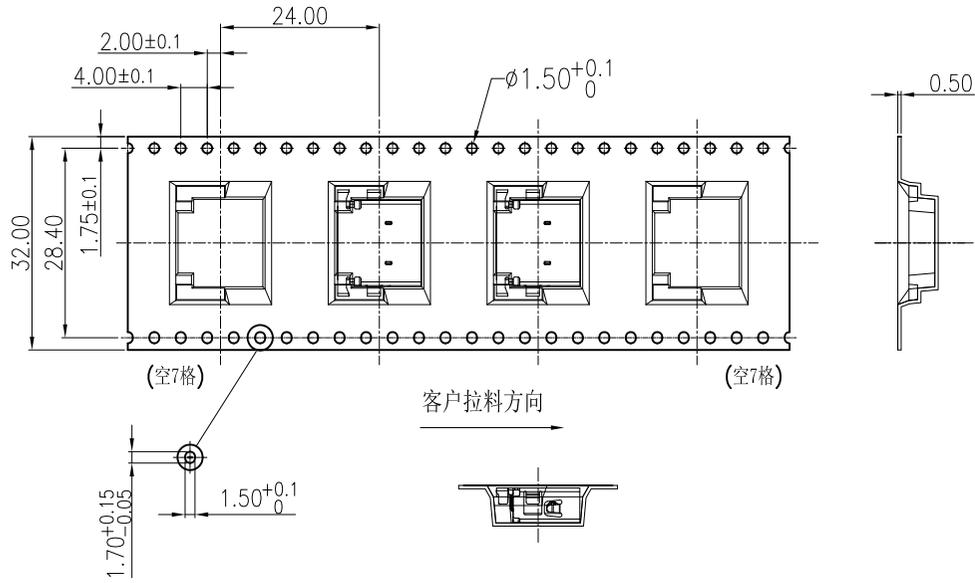

1. QUANTITY: 500 PCS
2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

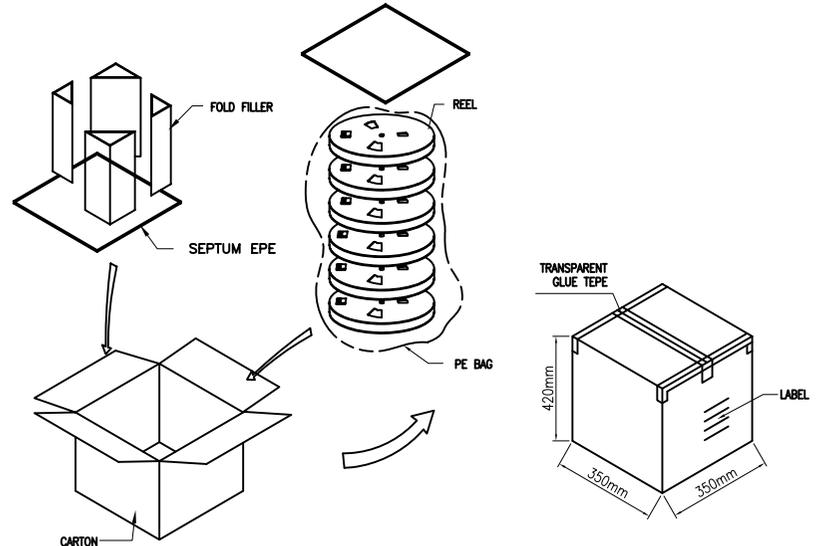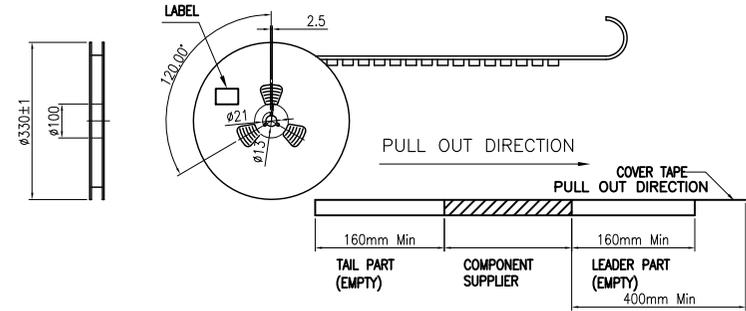

版次REV			日期 DATE			变更内容 DESCRIPTION			审核 CHK.		核准 APPD.		一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		JGTC® TERMINAL&CONNECTORS		
A1	20.12.30	变更载带步距20mm变更为24mm	李兴泽			X.X ±0.30	X* ±2*					李兴泽		W-USB2-CL130-023		ENDPT01							
A0	17.11.09	新图面发行	李兴泽			X.XX ±0.20	X.X* ±1*					李兴泽		品名 TITLE		USB2.0 AF R/A DIP TYPE CH=-1.30包装规范		比例 SCALE		SHEET		版次 REV.	
																	1/1		1/1		A1		