
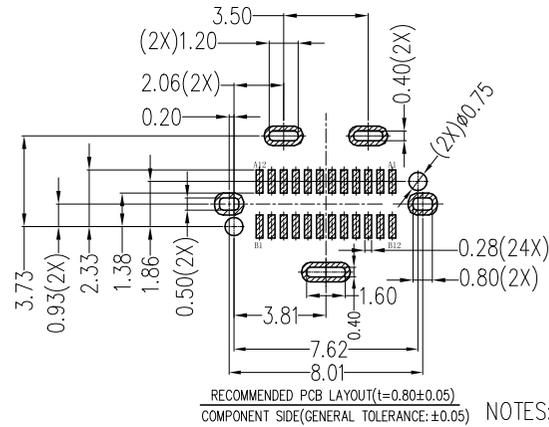
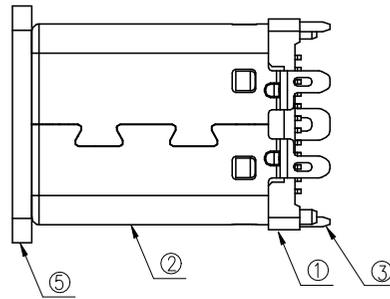


RoHS 2.0+HF





检验规范

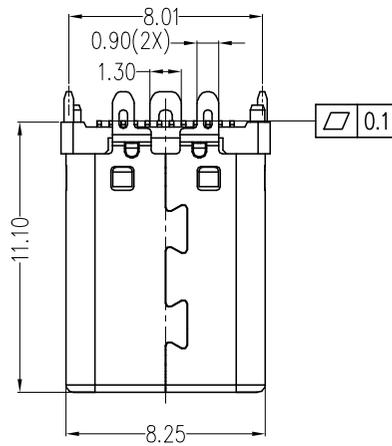

RECOMMENDED PCB LAYOUT(t=0.80±0.05)  
COMPONENT SIDE(GENERAL TOLERANCE: ±0.05)

NOTES:  
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

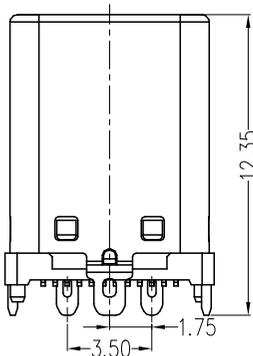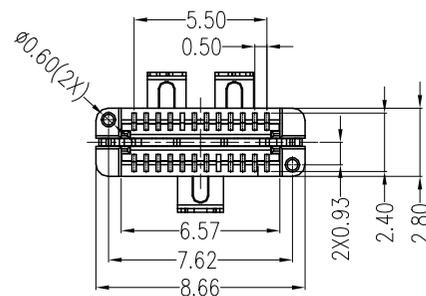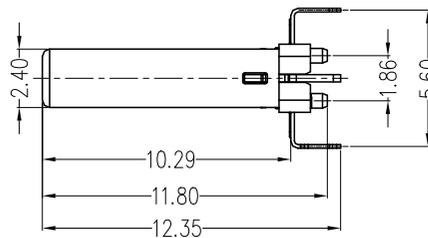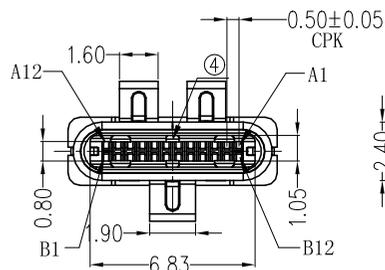

NAME(INTENDED USE)

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
5	COVER	HIGH TEMPERATURE PLASTIC	LCP BLACK	1PCS
4	SPRING	STAINLESS STEEL	---	2PCS
3	LATCH	STAINLESS STEEL	TIN: 80~120u"Min/Ni base: 50u"Min Plated	1PCS
2	SHELL	STAINLESS STEEL	Ni: 50u"Min Plated	1PCS
1	TERMINAL HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK/CONTACT: Au: 3u"Min Ni base: 50u"Min	2PCS

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND


  

PIN	SIGNAL NAME	PIN	SIGNAL NAME
-----	-------------	-----	-------------

一般公差 GENERAL TOLERANCE

X.X	±0.35	X°	±6°
X.XX	±0.25	X.X°	±3°
X.XXX	±0.15	▲	MAJOR DIM.

单位 UNIT  
mm



绘图 DR.

审核 CHK.

核准 APPD.

料号 PART NO.

W-UTP-L1029-009

品名 TITLE

USB C M TYPE 直立式外壳3支脚

文件编号 NUMBER

ENDPW03



比例 SCALE	SHEET	版次 REV.
1/1	1/1	AO

AO	19.01.09	换图框发行	李兴泽
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK. 核准 APPD.