
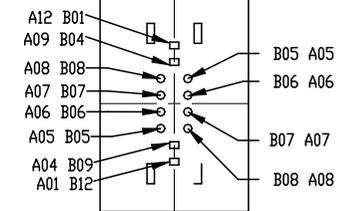
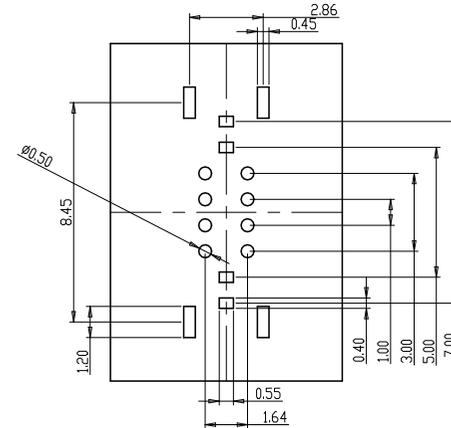
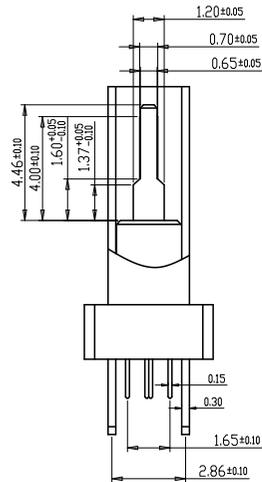
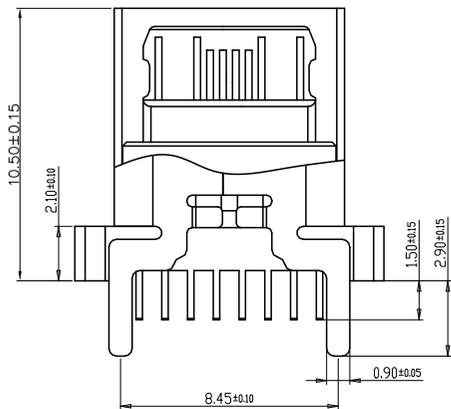
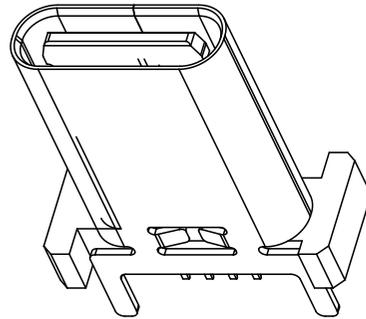


RoHS 2.0+HF


检验规范

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. CONTACT RESISTANCE: 30mΩ MAX.
 - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 - 1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE :0.5-2.0KgF(REF.)
 - 2-2. WITHDRAWAL FORCE :0.8-2.0KgF(REF.)
3. LIFE TEST: 10,000 CYCLES.

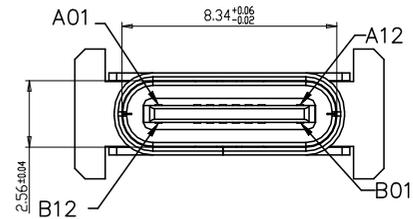

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

一般公差 GENERAL TOLERANCE

X.X	±0.35	X°	±6°
X.XX	±0.25	X.X°	±3°
X.XXX	±0.15	▲ MAJOR DIM.	

单位 UNIT	mm		
---------	----	--	--

绘图 DR.
审核 CHK.
核准 APPD.

料号 PART NO. W-UTP-L1050-ZC7

文件编号 NUMBER ENDPW03

品名 TITLE USB TYPE-C 16P母座立式直插 H=10.5



比例 SCALE 1:1	SHEET 1/1	版次 REV. A0
--------------	-----------	------------

A0	2023.06.21	新版发行	Hap	Joshua
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.