


- Material:
 - Contacts: Copper alloy T=0.15
 - Insulator: HIGH TEMPERATURE PLASTIC UL 94V-0,
 - Shell: STEEL T=0.15
- Electrical:
 - Current-max[amps]: 5A Max For Vbus/GND PIN; 0.9A Max For Other PIN.
 - Withstanding Voltage: 100V AC R. M. S
 - Contact Resistance [ohms]: 40mΩ Max. For Initial 10mΩ. Change After Test. Measure AT 20mV, 100mA
 - Insulation Resistance [ohms]: 100 mΩ min.
- MECHANICAL CHARACTERISTICS:
 - Mating force: 5~20N
 - Unmated Force: 8~20N After test.
 - Durability: 10000 cycles min.
- Plating:
 - Contacts: Gold flash plated on contact area,
 - Bright Tin plating 80-100u"Min on solder area
 - Nickel Under plating 20u"Min over all
 - Shell : plating 20~50u"Nickel over CU
- Environmental
 - Temperature Range: -55 ° C ~ +85 ° C

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	V _{BUS}	SBU1	D-	D+	CC	V _{BUS}	TX1-	TX1+	GND
GND	TX2+	TX2-	V _{BUS}	V _{conn}			SBU2	V _{BUS}	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

			一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS				
			X.X ±0.30	X° ±2°	校对 CHK.		W-UTP-L1375-A18	ENDPT01					
			X.XX ±0.20	X.X° ±1°	审核 CHK.		品名 TITLE		比例 SCALE 1/1 SHEET 1/1 版次 REV. A0				
			X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		USB TYPE C 24PIN PLUG						
A0	20.05.23	新图面发行	李兴泽	单位 UNIT									
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	mm								

环保物料

检验规范

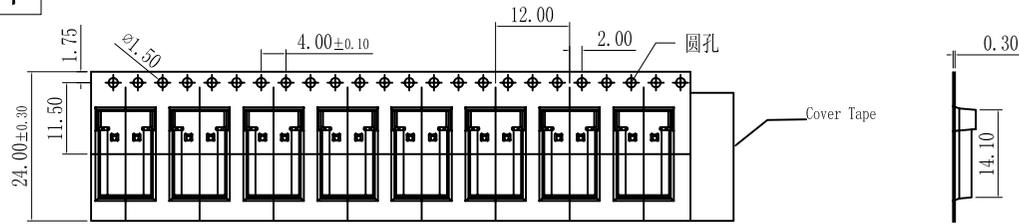






NOTES:

1. 包装数量: 15KPCS箱/10卷/1500PCS/; 当订单量和尾数不足15KPCS时可以合理选择纸箱规格.
2. 每箱放四袋干燥剂;
3. 纸箱封盖后以封箱胶封箱, 并于侧面贴上出货标签;
4. 外箱规格: 35*35*33.5cm;
卷盘规格: $\varnothing 330 \times 29$ mm;
5. 载带模具编号: F-2062; 料号: 9-040103-048A

包装收料方向

客户出料方向

净重:	8.5Kg
毛重:	14.8Kg

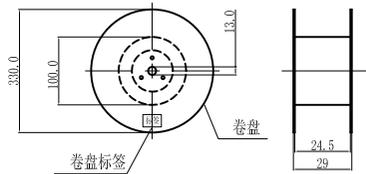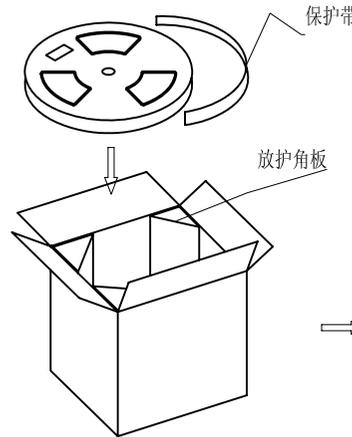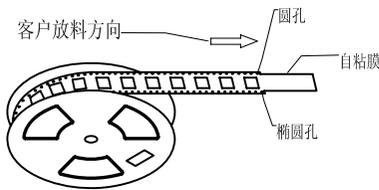


USER DIRECTION OF FEED

序号	包装名称	数量	单位
6	防水袋	1	PCS
5	护角	4	PCS
4	出货标签	1	PCS
3	外纸箱	1	PCS
2	干燥剂	4	PCS
1	卷盘	10	SET

一般公差 GENERAL TOLERANCE

X.X ±0.30	X° ±2°
X.XX ±0.20	X.X° ±1°
X.XXX ±0.10	▲MAJOR DIM.

单位 UNIT
mm



绘图 DR.

李兴泽

校对 CHK.

审核 CHK.

核准 APPD.

料号 PART NO.

W-UTP-L1375-A18

文件编号 NUMBER

ENDPT01

品名 TITLE

USB TYPE C 24PIN PLUG

JCTC®
TERMINAL&CONNECTORS

比例 SCALE
1/1

SHEET
1/1

版次 REV.
A0

A0	20.05.23	新图面发行	李兴泽
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK. 核准 APPD.