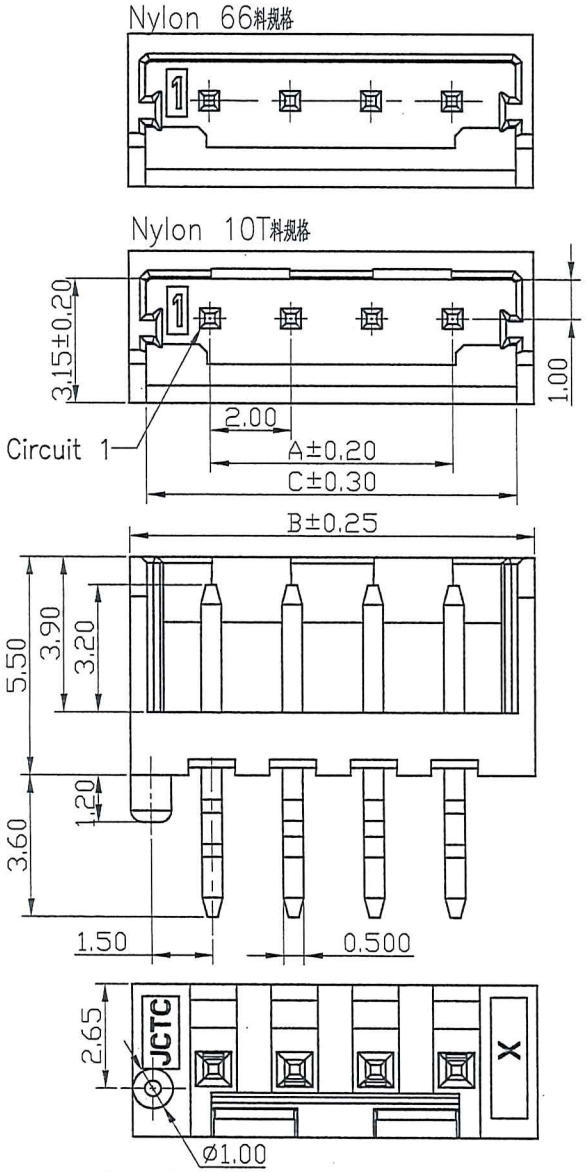

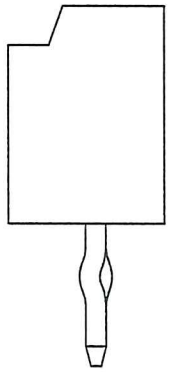

无柱规格

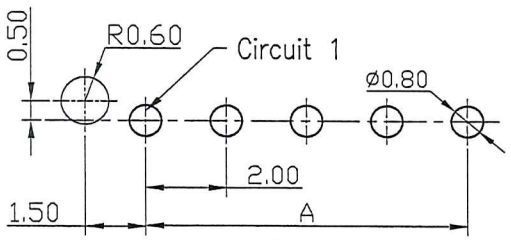

P.C.B. LAYOUT (T=1.6)

GENERAL TOLERANCES±0.05

Specifications:
Rated Voltage : 125V AC/DC
Rated Current : 2A AC,DC
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : −25°C~+85°C
The product using material and processing must conform to the "WI−PZ−142"HSF technical standard control requirements

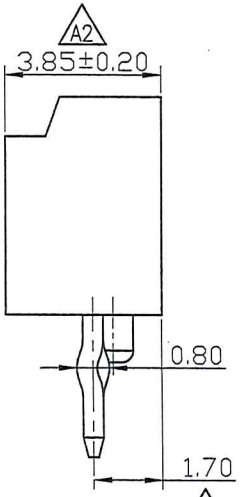

有柱规格

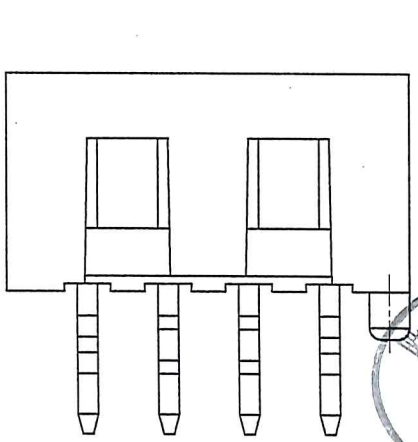

4P~16P



2P、3P

Circuits	Dimensions		
	A	B	C
2P	--	6.00	5.15
3P	4.00	8.00	7.15
4P	6.00	10.00	9.15
5P	8.00	12.00	11.15
6P	10.00	14.00	13.15
7P	12.00	16.00	15.15
8P	14.00	18.00	17.15
9P	16.00	20.00	19.15
10P	18.00	22.00	21.15
11P	20.00	24.00	23.15
12P	22.00	26.00	25.15
13P	24.00	28.00	27.15
14P	26.00	30.00	29.15
15P	28.00	32.00	31.15
16P	30.00	34.00	33.15

Part No.	Insulator	Contact	Notes
12019W00−NP−HF	Nylon 66,UL94V−0/Natural(White)	Brass/Tin−plated	无柱
12019W00−NP−H1−HF	Nylon 10T,UL94V−0/Natural(Beige)	Brass/Tin−plated	
12019W00−NP−F−HF	Nylon 66,UL94V−0/Natural(White)	Brass/Tin−plated	有柱
12019W00−NP−F−H1−HF	Nylon 10T,UL94V−0/Natural(Beige)	Brass/Tin−plated	

REV.	REVISION RECORD	DATE
A0	Initial Release	2021.09.14
A1	依PBJ0A202205060009新增规格	2021.05.09
A2	依ECN20220729185变更 A2 *2处	2022.05.27

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X' ±2°

UNIT: MM

SIZE: A4

SCALE 1:1	NAME	DATE
APPROVED	Nelson	22.05.27
DESIGNER	[illegible]	22.05.27
DRAWN	JIA	2022.05.27

PART NO. 12019W00−NPX−HF

DWG NO. ENDE05

TITLE 2.00mm PITCH DIP TYPE 180° WAFER

JCTC® TERMINAL&CONNECTORS

REV A2 SHEET 1/1

胜蓝科技股份有限公司 2022.08.03 工程部 技术文件发行章
胜蓝科技股份有限公司 发 2022.08.03 行 文控中心